Eigen-Séta v2 L3/L5 plaintext-encryption record

Run `run-20261011T1958Z-pke-l3-l5`, protocol frozen 2026-10-11 19:58 UTC. Source: same-repository commit `cd47963f9` imported into base `7f7672d01`, with scalar-recovery fix, public-input validation and the ChaCha20-Poly1305 KEM–DEM PKE layer.

Commands from `eigen_seta/`, run concurrently: `cargo run --release --example pke_run -- L3` and `cargo run --release --example pke_run -- L5`. Rust 1.99.0, release build; AMD EPYC 7763 shared cloud VM, x86-64 and five logical CPUs. No core pinning, isolation or frequency control. Other local validation ran during the same period. `OsRng` seeds not captured.

Set	KeyGen (s)	Encrypt (s)	Decrypt (s)	Correct
L3	186.427	1.1051	47.138	true
L5	298.906	2.2990	104.223	true

Requested and completed: one 39-byte authenticated plaintext round trip per set, with fixed associated data. Both processes exited 0; no failures. Each time is a measured wall-clock sample (n=1); no spread or uncertainty interval was recorded. Public key and complete PKE ciphertext sizes were 1992 / 2059 bytes at L3 and 2632 / 2699 bytes at L5. Exact output: `records/run_output.txt`.

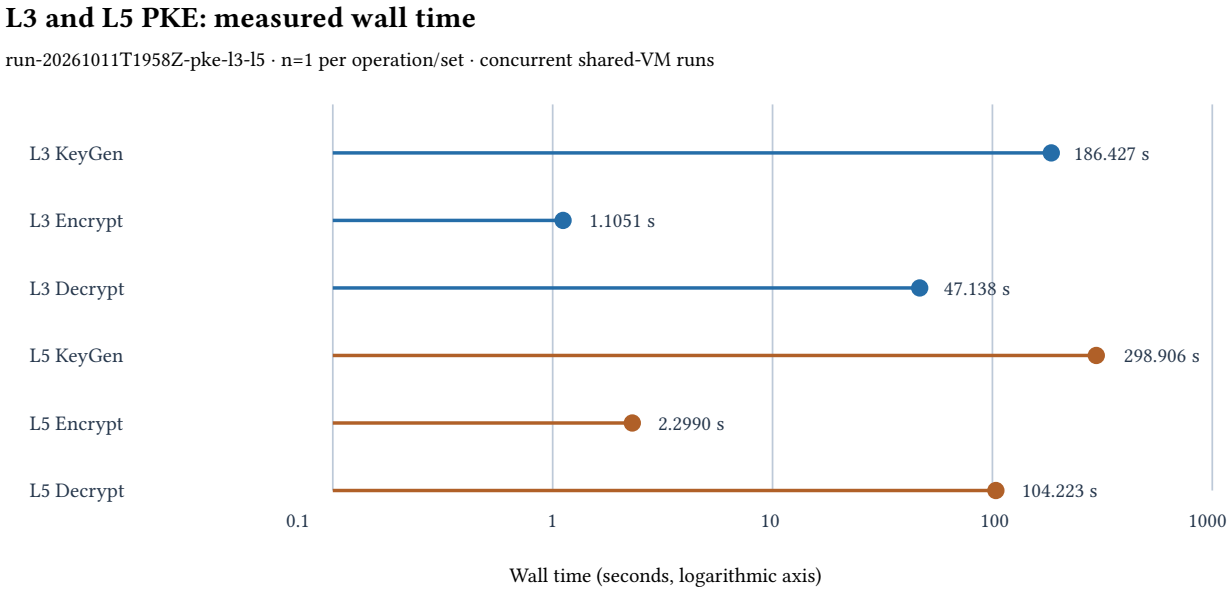

Figure 1: Wall times, one sample per operation and set, log seconds. Run run-20261011T1958Z-pke-l3-l5.

These results demonstrate functional authenticated plaintext round trips. Concurrent work on a shared VM prevents an isolated performance comparison. They do not establish security or constant-time behavior.