Independent Linux isogeny fiber replay

GitHub Actions run 38831567671 · 2026-10-16 00:50–00:54 UTC. Commit `de340fa2161088a5188b841ec82278f5067f8aed` built the frozen native runner and checker on an Ubuntu 24.04 Azure hosted VM with four AMD EPYC 9V74 vCPUs. Every one of 252 cold children exited zero. The checker replayed 5,355 scalar outputs and 37,061 relation witnesses; the host analyzer matched all 252 counted arithmetic vectors to the committed Darwin run. The raw 1,330,324-byte archive and its verified 1,533-file manifest are in `linux_host_v1/`. Full source links and SHA-256 hashes are in `REPORT.md`.
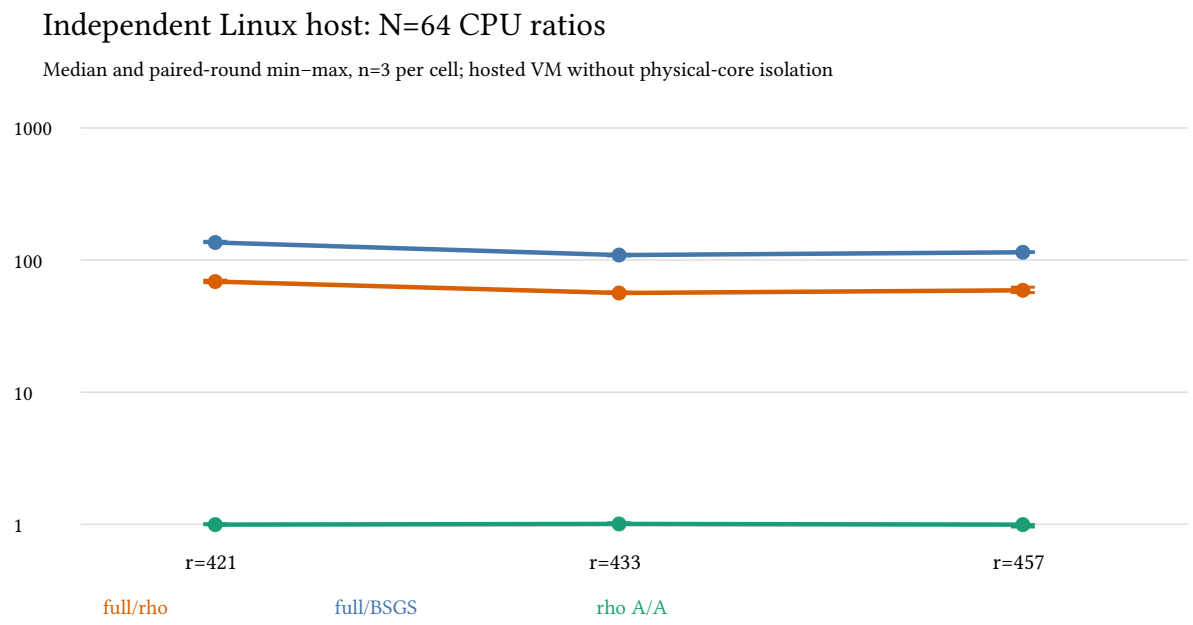
At 64 public targets, median whole-child process CPU ratios over three paired rounds were full-image/rho 68.750, 56.331, 59.050 at subgroup orders 421, 433, 457. Full-image/BSGS was 135.798, 109.094, 114.506; rho/rho-A/A was 0.994, 1.006, 0.994. Whiskers show each three-round minimum and maximum. The hosted VM has no reserved physical core, so this is descriptive cross-host CPU evidence, not admitted isolated wall performance or complete portable addition-equivalent cost.