
Nine-arm held-out fiber comparison

Run: heldout-nine-arm-v4 · **field:** `F_211^2` · **subgroup:** order 229 · **host:** Darwin arm64 shared L0.

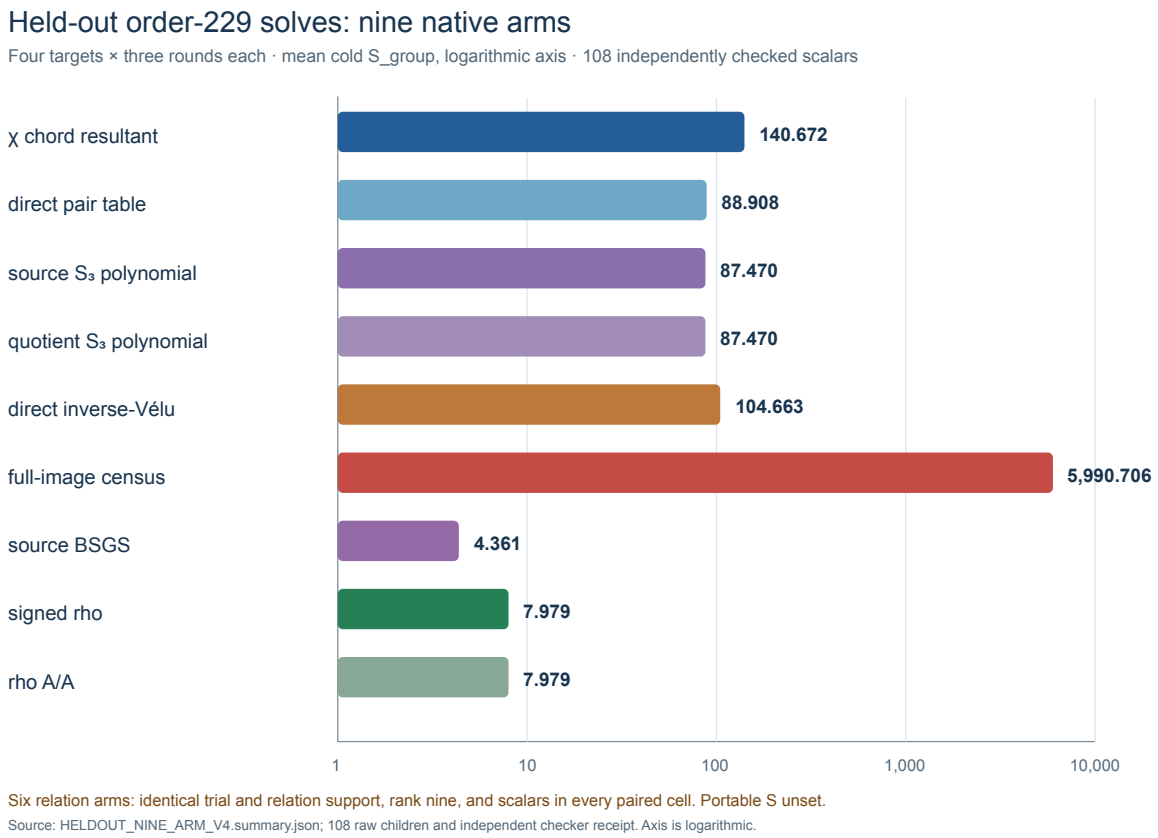

All 108 cold children returned scalars independently replayed on both different-j curves. The checker replayed all 996 relation witnesses. The six relation arms had identical trial, relation, rank-nine and scalar outcomes in all 12 paired cells.

Inverse-Vélu scanned 27 destination points and accepted 21 image points before selecting the eight frozen columns; full-image enumerated 44,655 source points. Mean cold counted-group S was 104.663 inverse, 5,990.706 full-image, 7.979 signed rho and 4.361 BSGS. Full/inverse counted work = 57.238; inverse/rho

13.117. Mean whole-child CPU full/inverse = 58.728/6.700 ms,

a ratio of 8.766; rho A/A/rho = 0.995.

Counted-group S omits unconverted field and allocation work. The shared host lacks wall isolation. Complete portable S, independent Linux replay, L2 admission and larger-order full-image feasibility remain open. Sources: `HELDOUT_NINE_ARM_SPEC_V4.json`, `HELDOUT_NINE_ARM_V4.summary.json`, independent receipt, and 108 raw child records.