Prime Degree Frontier

Failed admission-control run · 2026-10-15T23:25Z

Requested and executed scope

Run the frozen native executable's all-standard-curve policy and candidate ladder, then native admission controls. The first positive P192/13 judgement was censored, so this run stopped. P521, the eight mutation cases, forged-score leaderboard, and scheduling stress were not reached in this run. Their earlier passing packet and later corrected rerun are separate evidence.

Source revision	66b5b7ce0c09a02700b71ce4519449212ce72d7e
Executable SHA256	9755969d8a3217d7b317d9eb47d643ca07d038519a03ed349a19ae52476c9854
Host	Apple M4 Pro; macOS 26.6; shared host
Roster	54 standard prime models, all listed separately.
Judge result	CENSORED score absent.
Resource receipt	RESOURCE_MONITOR_UNAVAILABLE
Replay child output	PASS

Frozen judge source · Raw failed packet · Exact source/target certificate

Observations and cause

The child emitted a passing independent certificate, but the supervising parent reported unavailable resource monitoring and withheld the score. Its receipt retains a positive sampled RSS value, five unavailable samples and exit code 0. This is an admission/supervision failure, not a mathematical rejection.

The source treated every zero-RSS read as unavailable even after the startup handshake had succeeded. On the observed macOS shutdown transition that made the parent censor an already completed child. The correction keeps the positive sample requirement before the handshake, then treats a successful zero-RSS read as a valid sample afterward. Genuine unavailable monitoring still fails closed. The follow-up run must pass the full integration controls and twenty fresh short-map judgements with positive recorded RSS before publication.

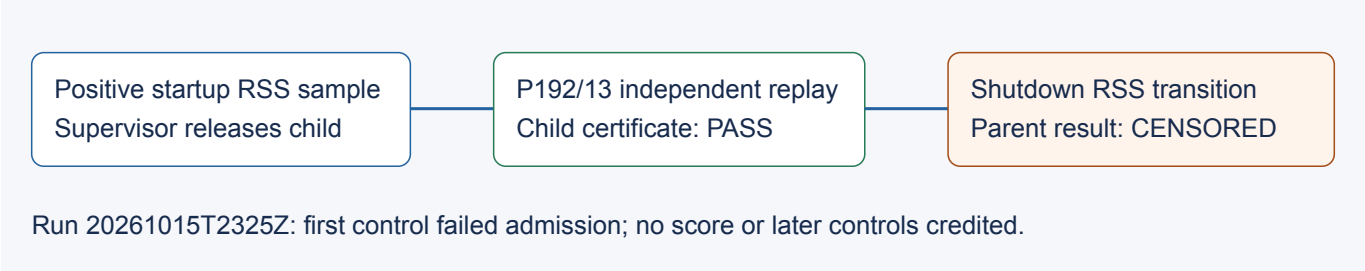

Figure 1: Observed control flow: a passing child was censored by its resource supervisor.

Reproduction and retained evidence

The exact executable/source identities are in freeze.json and binary.sha256. policy.json and plan.json retain the complete roster and candidate screen. controls.log retains the failed assertion. The raw map, constructor receipt, exact independent verification certificate, stderr, resource receipt and censored entry are under controls/p192/. No score is assigned to this run. The full-package failure is also retained in the validation archive.

Commands were run through the standalone installed binary from an installation directory. Replay and construction had the published separate budgets. The host was shared; operational receipts establish no isolated speed result. The canonical IC/rho dashboard, leaderboard and curve-edge charts remain unchanged because no new graphable mathematical or performance fact was found.