
Pairing batch V1 failure and V2 charged retry

Cell: $(p, r) = (61, 19)$. **Host:** shared Darwin arm64, L0. **Inputs:** `RUN_SPEC_V1.json` and `AMENDMENT_V2.md`.

V1 wrote its setup row and exited on the first unverified rho seed. V2 retained that seed and charged retries. Target zero's first attempt ran 806,452 steps and 386,302,417 current-thread CPU ns without verifying; retry one solved in 11 steps and 32,292 ns. V2 then completed all 18 pairing targets. Its rho total is dominated by that failed attempt.

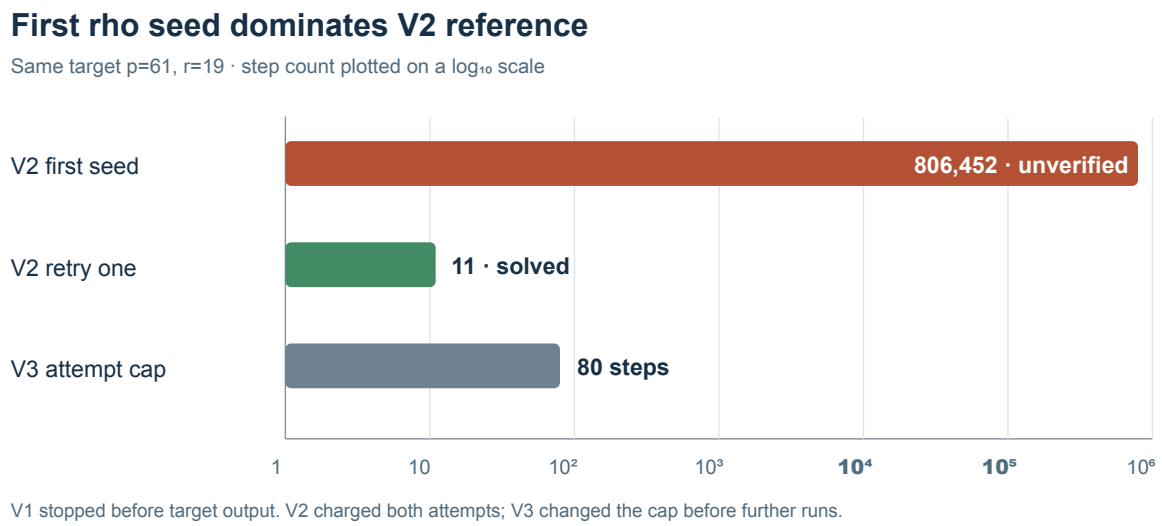

V1 stopped before target output. V2 charged both attempts; V3 changed the cap before further runs.

V1 raw SHA-256: `175c1ad24d0d43090a3fe5e737880c2f5b5450bf74153a98cb28cb615a084017`. V2 raw SHA-256: `20cc208f41a2dda7d3ee6dae1822d64eebde91d56a06ccb8ccae09884bb9e000`. Both stderr files are retained. The V3 amendment froze an 80-step cap for this subgroup and a separate six-class reference before new runs. These V1/V2 records do not support a method cost ratio. See `REPORT.md` for links and limitations.