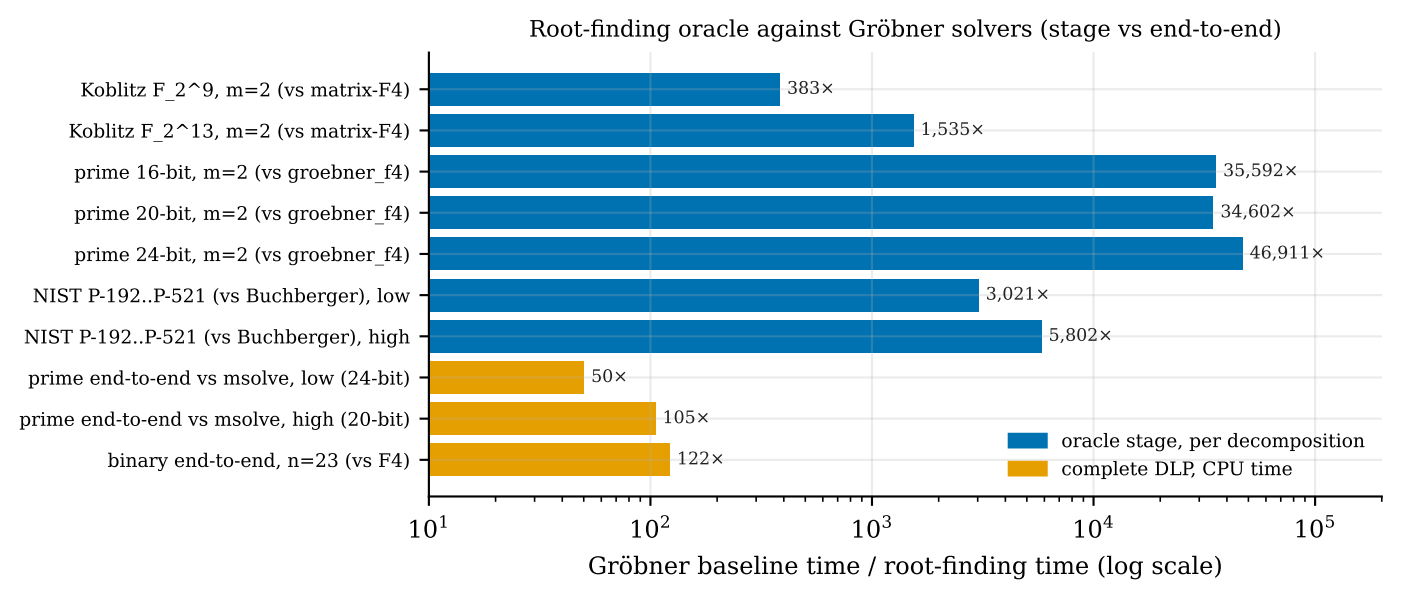
Root-finding oracle against Gröbner solvers (stage vs end-to-end)
Koblitz F_2^9, m=2 (vs matrix-F4)
Koblitz F_2^13, m=2 (vs matrix-F4)
prime 16-bit, m=2 (vs groebner_f4)
prime 20-bit, m=2 (vs groebner_f4)
prime 24-bit, m=2 (vs groebner_f4)
NIST P-192..P-521 (vs Buchberger), low
NIST P-192..P-521 (vs Buchberger), high
prime end-to-end vs msolve, low (24-bit)
prime end-to-end vs msolve, high (20-bit)
binary end-to-end, n=23 (vs F4)
383×
1,535×
35,592×
34,602×
46,911×
3,021×
5,802×
50×
105×
122×
oracle stage, per decomposition
complete DLP, CPU time
10^1
10^2
10^3
10^4
10^5
Gröbner baseline time / root-finding time (log scale)