Selected order-1,201 rational-fiber audit

The frozen ascending-prime selector chose $(p, r, h) = (1237, 1201, 1275)$. The Rust runner enumerated every source point and destination image; an independent Rust implementation reconstructed every fiber and all $1201^2 = 1,442,401$ ordered subgroup pair identities. Both processes exited 0. Their source/image counts are 1,531,275 and 510,425, respectively, with three preimages at every rational image point. The identity fiber is $\{O, T, -T\}$ and the order-1,201 subgroup maps injectively. The runner/checker peak RSS values were 199,163,904 and 367,984,640 bytes, below the 512 MiB cap.

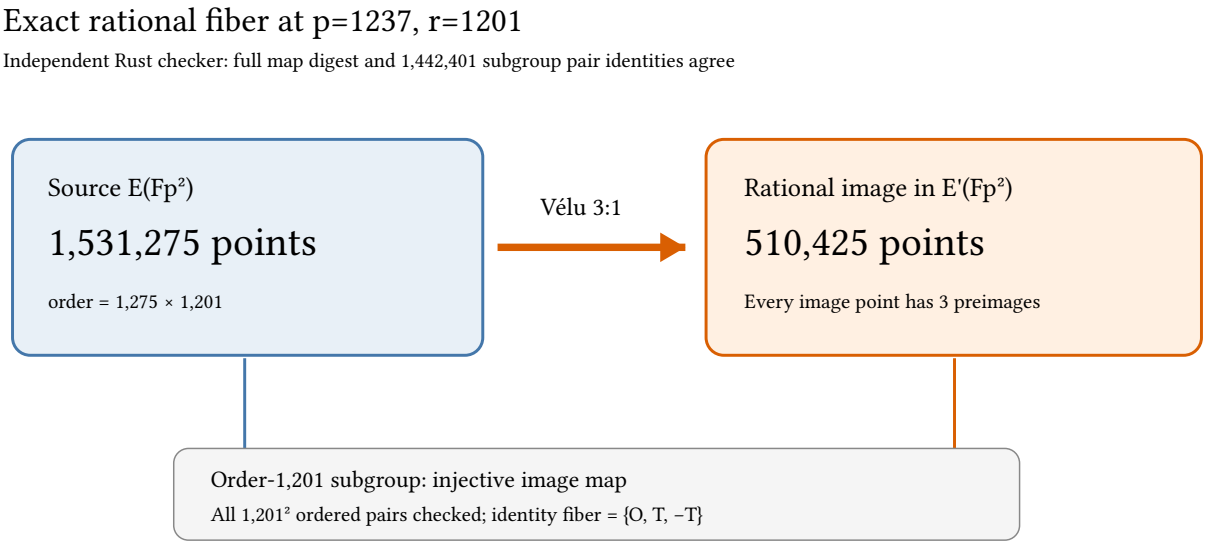

Exact commands, source/binary and receipt hashes, stderr, the full-map and subgroup digests, and links to the native sources are in `FIBER_RUN.md`, `FIBER_1237_1201_V1.json` and its `.check.json`. This proves the selected finite fiber and map-law identities only. The cold same-target solver, complete portable cost and isolated performance gates follow separately.