

# Boolean solver calls: F4 and F5

Shared K_1 / 2^17 m=2 workload, 16 Boolean variables, four planted and four random targets, maximum degree 3. The solve_boolean_system entry point, including root readback.

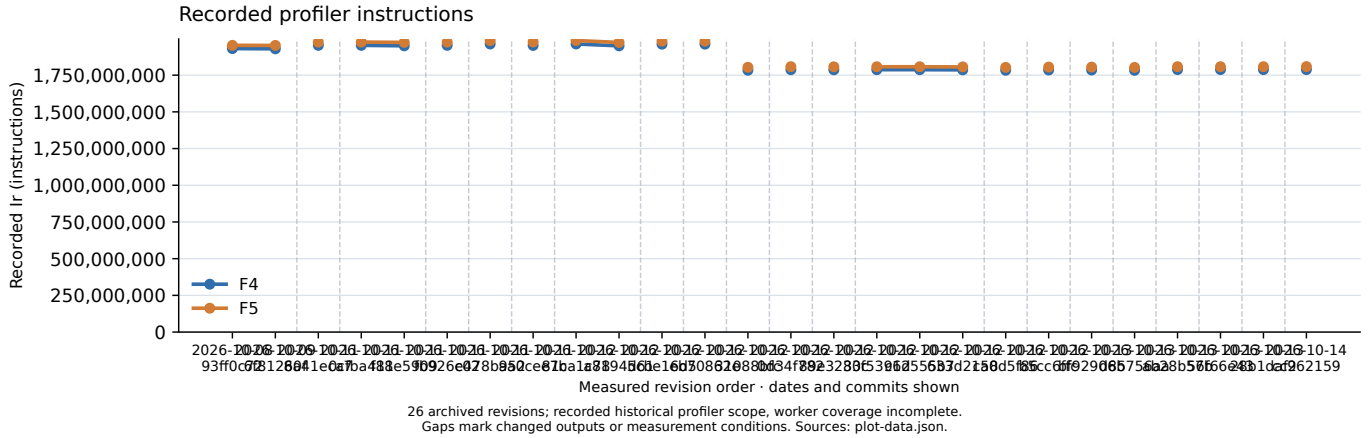


26 archived revisions; recorded historical profiler scope, worker coverage incomplete.
Gaps mark changed outputs or measurement conditions. Sources: plot-data.json.

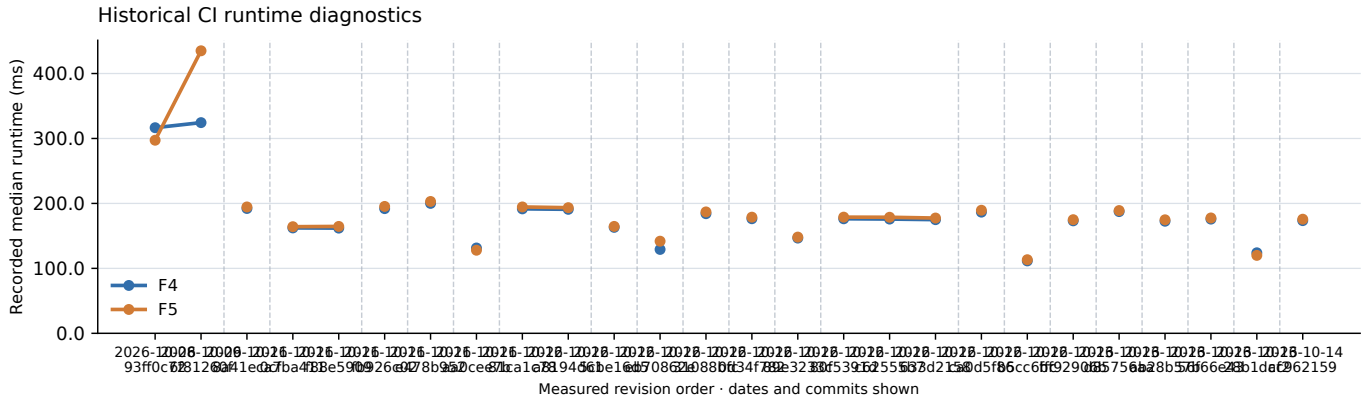


26 archived revisions; recorded medians, no stored spread or isolated timing eligibility.
CI runtime diagnostics; sample counts and condition changes retained in plot-data.json.

| UTC date / revision | F4 Ir | F5 Ir | F4 ms | F5 ms |
|---|---|---|---|---|
| 2026-10-08 / 93ff0c72 | 1,930,989,200 | 1,953,108,992 | 316.570 | 297.297 |
| 2026-10-09 / 6f81260f | 1,929,374,570 | 1,952,598,745 | 324.403 | 435.004 |
| 2026-10-11 / 8a41eca7 | 1,953,021,023 | 1,974,789,730 | 192.203 | 194.561 |
| 2026-10-11 / 0cfba411 | 1,953,020,766 | 1,975,267,516 | 162.266 | 164.161 |
| 2026-10-11 / f88e5909 | 1,949,981,977 | 1,973,219,339 | 161.982 | 164.584 |
| 2026-10-11 / fb926c02 | 1,953,020,766 | 1,974,789,781 | 191.988 | 195.374 |
| 2026-10-11 / e478b952 | 1,962,376,386 | 1,985,422,672 | 200.058 | 202.996 |
| 2026-10-11 / aa0cee7b | 1,952,402,641 | 1,975,976,609 | 131.376 | 127.933 |
| 2026-10-12 / 81ca1c78 | 1,962,376,386 | 1,985,933,163 | 191.630 | 194.567 |
| 2026-10-12 / a8194d61 | 1,949,694,281 | 1,972,772,104 | 190.899 | 193.455 |
| 2026-10-12 / 5cbe16d5 | 1,961,124,313 | 1,981,687,200 | 163.135 | 164.619 |
| 2026-10-12 / eb70862e | 1,961,124,313 | 1,981,686,883 | 129.169 | 141.847 |
| 2026-10-12 / 31088bfc | 1,783,643,232 | 1,803,568,510 | 184.204 | 186.912 |
| 2026-10-12 / 0d34f782 | 1,787,314,371 | 1,807,797,314 | 176.437 | 178.824 |
| 2026-10-12 / 89e3233c | 1,786,351,448 | 1,806,842,750 | 146.640 | 148.159 |
| 2026-10-12 / 80f5391d | 1,787,314,371 | 1,807,244,283 | 176.353 | 178.878 |
| 2026-10-12 / c62555b7 | 1,787,314,371 | 1,807,244,283 | 175.899 | 178.689 |
| 2026-10-12 / 633d2158 | 1,786,234,678 | 1,806,168,901 | 174.990 | 177.494 |
| 2026-10-12 / ca0d5f86 | 1,783,289,117 | 1,802,994,551 | 186.580 | 189.492 |
| 2026-10-12 / b5cc6ffc | 1,785,257,434 | 1,804,956,249 | 111.497 | 113.333 |
| 2026-10-13 / bf92906b | 1,785,257,434 | 1,804,956,249 | 173.194 | 174.965 |
| 2026-10-13 / d85756aa | 1,783,003,746 | 1,802,715,389 | 187.409 | 189.039 |
| 2026-10-13 / ab28b57b | 1,787,965,641 | 1,807,670,514 | 172.579 | 174.785 |
| 2026-10-13 / 56f66e43 | 1,787,969,850 | 1,807,674,723 | 175.850 | 177.627 |
| 2026-10-13 / 28b1daf2 | 1,787,969,850 | 1,807,674,723 | 123.983 | 119.998 |
| 2026-10-14 / cc962159 | 1,787,965,641 | 1,808,168,023 | 173.510 | 175.690 |

Historical Python-orchestrated perf.history/v1 snapshots; no new performance run or speedup claim.

Runtime: one recorded median per kernel and revision; sample counts retained per point, no stored spread, no isolated timing eligibility. Runtime is diagnostic.

Profiler Ir is the recorded historical scope. Worker-thread coverage is incomplete for these kernels; it is not a complete solver operation count.

Lines stop at missing values, changed output fingerprints, or changed host/compiler/harness/profiler. Different algorithm fingerprints are expected and are not equated.

X positions are measured revision order, labelled with UTC commit date and revision; spacing is not elapsed time.

Evidence: 26 imported perf.history/v1 snapshots; historical_sources in plot-data.json retains raw filenames, SHA-256 hashes, hosts, harnesses and sample counts. Source data and provenance: plot-data.json and REPORT.md. These plots do not establish an end-to-end ECDLP gain.