Inverse-Vélu V1 splitter: failed smoke child

Public cell `p=1237, r=1201`; round zero, one target.

The V1 schedule used 32 base-field shifts `[i,0]` to split the rational factor of the inverse cubic by quadratic character. The native child hit its frozen cap and exited 101 before relation collection or scalar recovery. Its first stderr, unchanged-binary retry, exit file, and source/binary SHA-256 are retained beside the versioned protocol. The first shell wrapper did not record its exit because `status` is read-only in zsh; the retry did.

V1 inverse-cubic splitter: observed cap failure

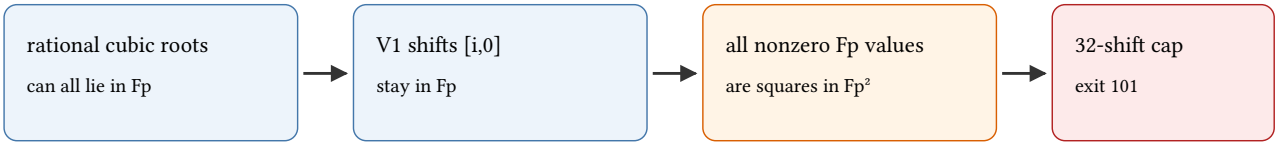

V2 uses extension-field shifts [i,1]; the failed V1 receipt is retained.

For roots and shifts in the base field, every nonzero shifted value is a square in the quadratic extension. That makes this character test unable to split such a cubic. V2 changes only the shift family to `[i,1]`; the V1 failure is not treated as a missing fiber or an ECDLP cost result. See `REPORT.md` and `../../PROTOCOL_V2.md`.