Order-1,201 seven-arm cold batch: run record

The committed `RUN_SPEC_V2.json` froze the first selected cell $(p, r, h) = (1237, 1201, 1275)$, 64 public targets, seven arms, three rotated rounds, prefixes 1/4/16/64, caps and exact source/binary/input hashes before child measurement. The initial target-freeze attempt failed with an unlisted `j_pair()` prime before writing targets; its V1 stderr and exit are retained. Corrected V2 target freeze exited 0.

The exact command was `zsh .../order1000/run_order1201_v2.zsh`. All 84/84 cold child exits were 0. The independent Rust checker recomputed 1,785/1,785 scalar outputs and 12,486 relation witnesses, including map identities, rows and recovery. Run SHA-256: `d314764e87988b2dc12675d199612f50abc538d1782761c562c2c74be5e34d89`. The replay certificate, per-child stdout/stderr/meter/exit files, commands, host and source links are in `BATCH_RUN.md`.

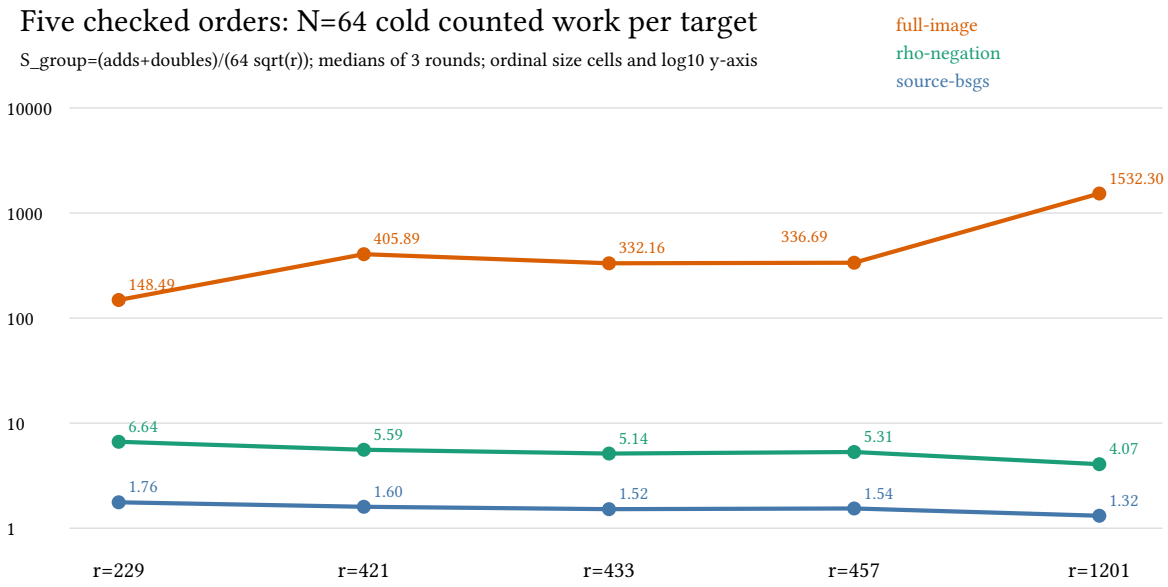

Source: 420 checked cold children, 8,925 scalar replays. Nonarithmetic work remains unpriced; L0 host timing is separate.

The figure shows the complete **group-counted** cold cost per target, not complete portable S. Fp counts overlap group calls, and native hash/table/row/allocation/I/O work lacks a pinned common price. Shared Darwin arm64 timing is L0 descriptive. An L2-or-better physical-core wall session and different-host replay are distinct gates. The V1 graph with an overlapping label is preserved; V2 only repairs the label position.