WeakCurves cover-source alignment

Run `run-20261015T0950Z` · 15 October 2026

The clean Linux catalog job passed its snapshot, native GHS audit and attack-map checks, then found a source-digest mismatch in the decomposition index. The `main` covers inventory changed from SHA-256 `93a0267f762e84037328636dd4d60f1b378462818500e711c7fb81e9e8c7452c` to `7d2f8c5c90b0b84aff79959223443285c5f6ce8e52cc5058be2e4699fdb6e884`. The current-main file was copied byte-for-byte and the index and site copy were regenerated.

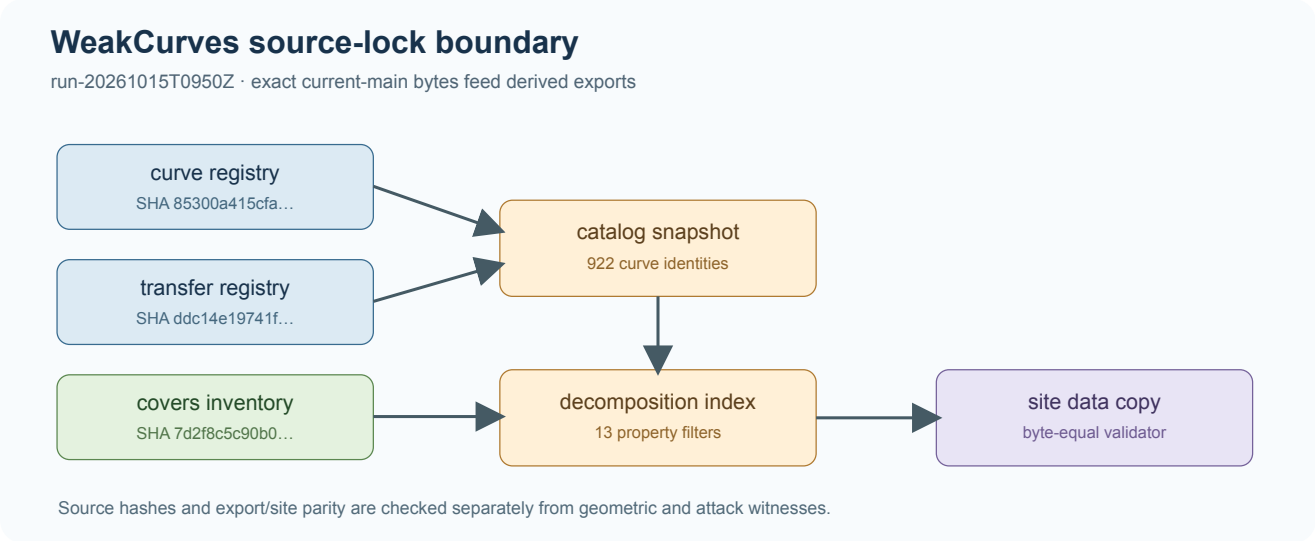


Figure 1: Source files and the derived export checked by the decomposition validator.

The decomposition index still has 922 exact identities, 917 checked cover certificates, five formula replays and thirteen property filters. Only its `covers_sha256` field changed. The native genus-128 GHS cost sweep and its conditional prices remain identical to the previous run. Actual usable places, ordinary-query relation yield, useful rank and target descent remain unmeasured.

Evidence: `research/weak_curve_leaderboard_20261012/validation/ghs128_ci_decomposition_source_attempt2.log`, `docs/curves/covers.json`, `research/weak_curve_leaderboard_20261012/decomposition_properties.json`. The current-head Linux replay remains the final gate. This source-lock refresh adds no curve-level finding or isogeny edge.