
Final cohorts: results and failed reference

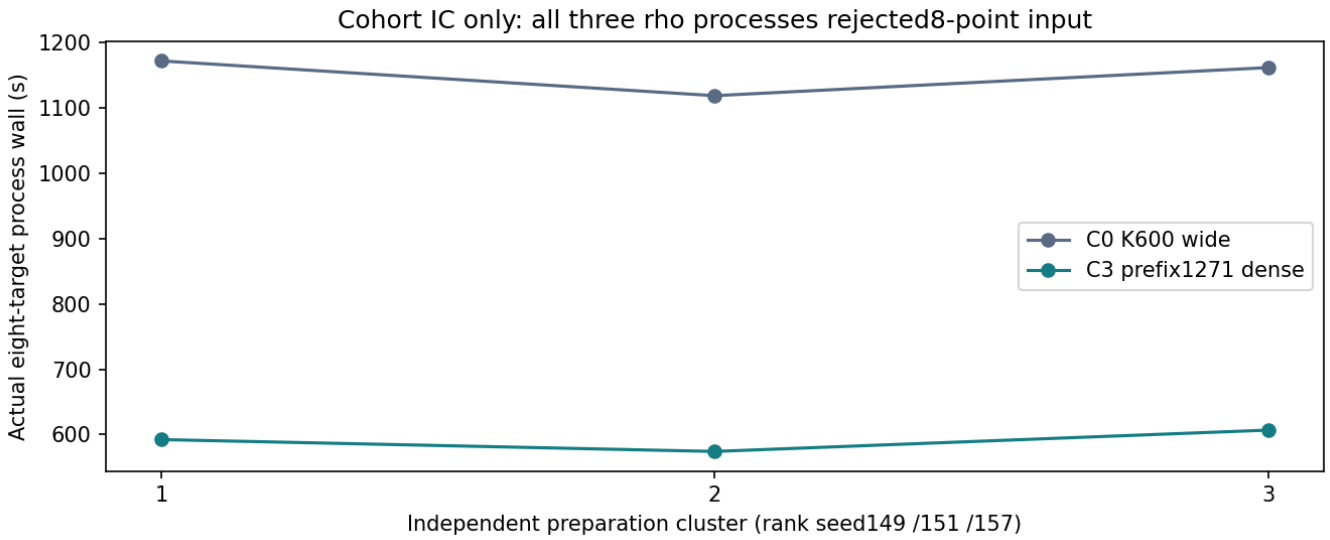

Three genuinely reused8-target IC preparation clusters completed. C0 mean1150.628970s; C3 mean591.192669s. Native C3/C0 0.513800 [0.505576, 0.522482],20,000 paired cluster draws, seed202610157802. Only three preparation clusters limit uncertainty. This IC-basis comparison is not an IC/rho comparison.

All three rho processes returned2 in about0.006s before any answer: inherited worker lines107-108 accept only a singleton or exactly32 points. The predeclared8-point matrix and frozen worker were incompatible. This implementation mismatch should have been caught before timing. No solves are retried; raw records, failed audit and analyzer refusal remain unchanged. Failed-launch wall time is never treated as rho solve time.

Six cohort IC rank/log audits and the final rho A/A pair pass:8/11 processes and50/74 canonical answers, including48IC and2rho. The full-stage analyzer correctly refuses to generate complete cohort statistics. Supplemental native analysis reports the six verified IC processes only and leaves every rho field null. See problems/n83-eight-target-rho-contract.md for the unresolved acceptance conditions.

All cohort targets: three recorded repeats

Target / role	Repeat1(s)	Repeat2(s)	Repeat3(s)	Native mean(s)
0 / control	0.944780	0.893198	1.048826	0.962268
0 / selected	0.212327	0.231449	0.218369	0.220715
1 / control	0.423121	0.416658	0.452766	0.430849
1 / selected	0.134075	0.146941	0.139594	0.140203
2 / control	5.111935	5.334300	5.495097	5.313777
2 / selected	0.082102	0.104607	0.085545	0.090751
3 / control	0.486521	0.420921	0.528880	0.478774
3 / selected	0.382984	0.430788	0.397981	0.403918
4 / control	0.734322	0.816188	0.833977	0.794829
4 / selected	0.093264	0.099044	0.097516	0.096608
5 / control	1.249948	1.363634	1.210447	1.274676
5 / selected	0.198137	0.205818	0.204467	0.202807
6 / control	0.415989	0.437810	0.408795	0.420865
6 / selected	0.232286	0.241682	0.235639	0.236535
7 / control	0.860173	0.932045	0.868460	0.886893
7 / selected	0.255603	0.270130	0.263494	0.263076

Every target has three verified IC query intervals under independent preparations. Rho repeats, online ratios and intervals are unavailable: all three cohort rho workers rejected the8-point input before answering. There is no substitution from cold or historical32-target rho measurements.

Rank seeds149/151/157; target rotations0/3/5, reversal in cohort2 as numbered by protocol. Exact order and per-Q rho seeds are in the frozen matrix. No target-dependent rho DP/walk state sharing was introduced. Repeated-target rows remain secondary to actual complete-process costs.

Cohort attempted processes 1-11

Process	Status	Wall(s)	CPU(s)	PeakRSS(bytes)
cohort_0_control	complete	1171.758520	1171.647730	5834178560
cohort_0_selected	complete	592.413430	592.355203	10832384000
cohort_0_rho	FAILED	0.005649	0.001023	1900544
cohort_1_selected	complete	574.273632	574.220087	10832523264
cohort_1_rho	FAILED	0.005605	0.000923	1900544
cohort_1_control	complete	1118.574987	1118.492481	5834240000
cohort_2_rho	FAILED	0.005551	0.001011	1892352
cohort_2_control	complete	1161.553402	1161.464725	5834178560
cohort_2_selected	complete	606.890945	606.831654	10832515072
aa_4_0	complete	1.582627	1.574619	19464192
aa_4_1	complete	1.541704	1.538604	19378176

Every declared process appears, including failures, internal-cap costs and controls. Values copied from native final aggregation; execution and raw hashes bind the records. Failed process times are attempted costs, never successful solve observations.

All three rho entries returned2 without answers. Their tiny launch costs cannot be compared with IC solve costs. This stage has no complete matched IC/rho result. The final two singleton rho A/A controls did complete and have identical work.

Independent audits and rho A/A controls

Pair / stage	First wall(s)	Second wall(s)	Larger / smaller	Work
aa_0 / training	4.630801	4.764793	1.028935	identical
aa_1 / training	2.018198	2.085859	1.033526	identical
aa_2 / training	4.435090	4.296349	1.032293	identical
aa_3 / cold	1.842876	1.862018	1.010387	identical
aa_4 / cohort	1.582627	1.541704	1.026543	identical

Native recursion compares every deterministic A/A outcome field; clocks need not match. Five pairs span training, cold and cohort phases. Independent rank checker costs are excluded from solver process costs and separately wait4-metered; per-check wall/user/system CPU/peakRSS and logs are in training-audit, cold-audit and cohort-audit. No audit was repeated to replace a failed result.

Full audits independently reconstruct every modular relation row and rank gain, backsolve all base logs, check every representative[log]G, anchored target/four-point witness/intermediate and final answer/log reconstruction. Training selection independently checked all16 canonical answers; cold26 and cohort50 were independently checked. Thirty transcripts cover72 IC answers, and all20 available rho answers pass canonical scalar replay.

The cohort checker initially reports “Cannot read input file” for missing answer files. Raw process receipts and stderr establish why those files are absent. That diagnostic is retained unchanged; no checker correction is needed. The full-stage statistical gate refuses incomplete evidence as intended. The new final aggregator binds all attempts, raw hashes and previous audit/selection seals, recursively checks all five A/A pairs, and emits null for the missing batch comparison.