N83 current-source factor-base comparison

K1280/root11 dynamic reached 4.73325 ms online and 146.960 s receipt wall on the previously exposed public point. The same-source K2543/root11 control used 18.983375 ms online and 401.115 s receipt wall. K1280′s observed online interval was 4.01 times shorter on this point.

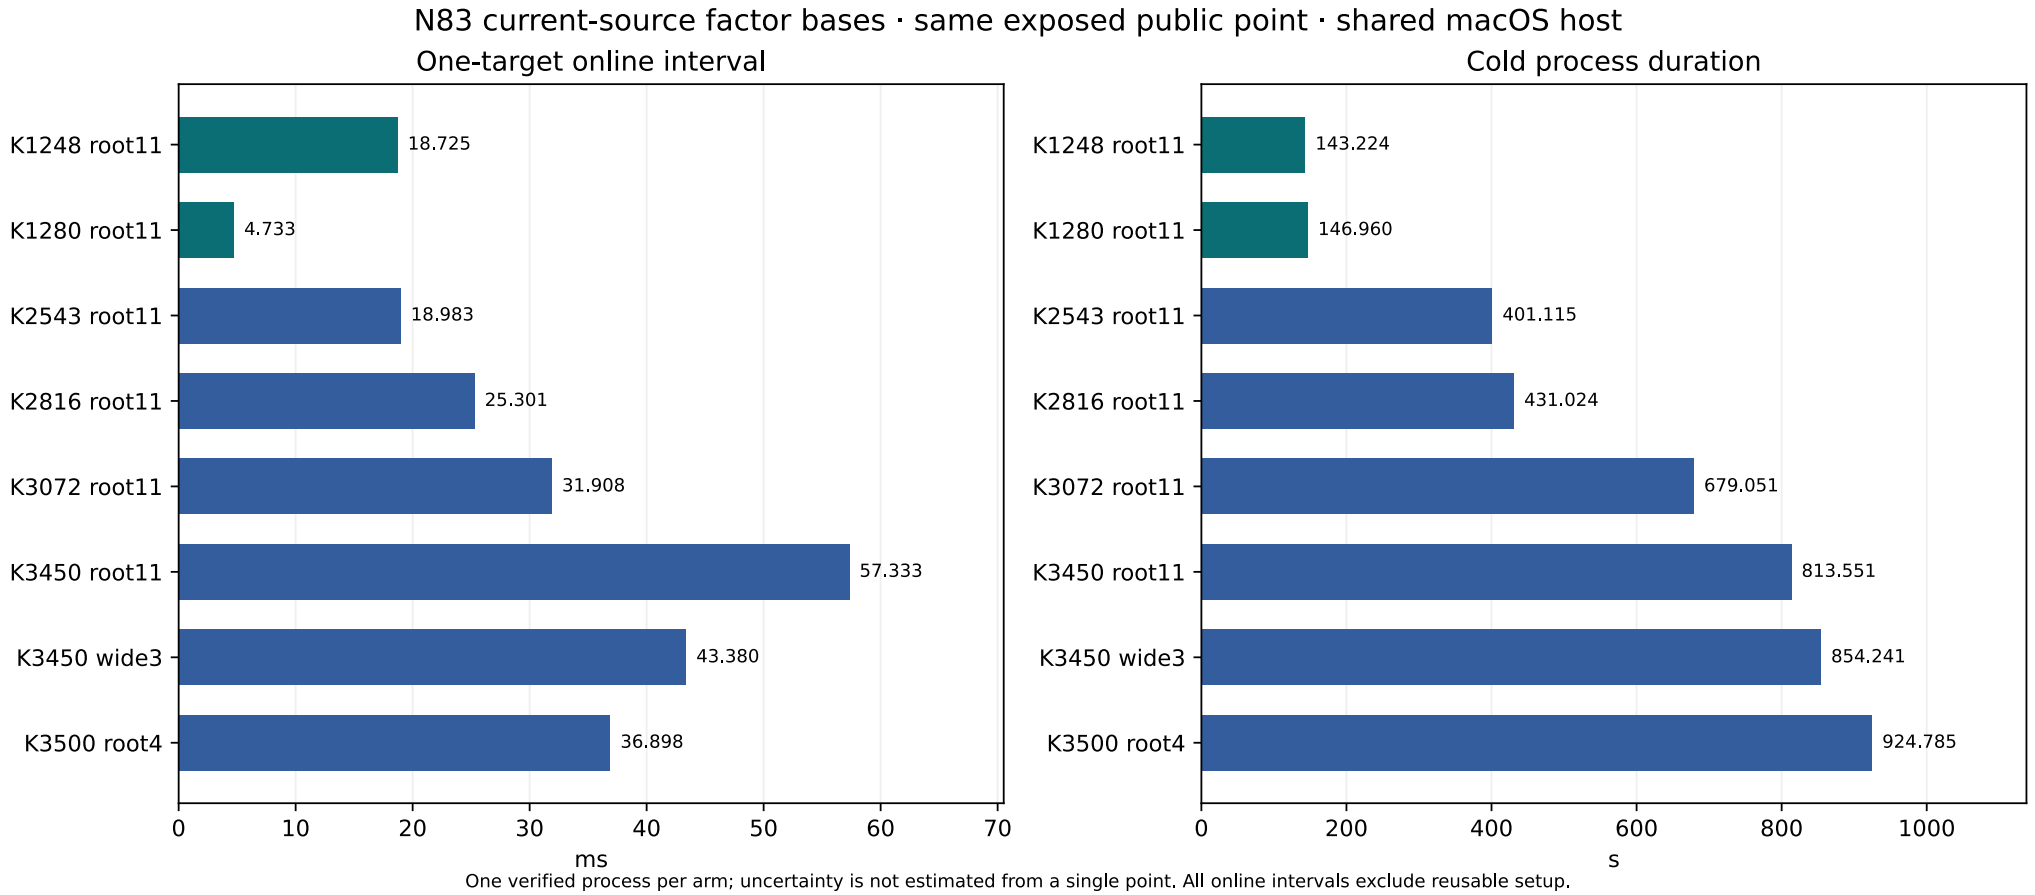

Figure 1: Verified one-target online intervals and cold receipt walls. One process per arm on a shared macOS host. Values are diagnostics on one exposed point; uncertainty is not estimated.

The eight rows use the same IC source SHA-256 `8a2fe55dd90dc33892c197d27260182bf783fc8212fb485d8297daf2bbba8e12` and local release binary SHA-256 `d71a9662c9d4e2dde58443bfc646a05737c6b9ca6b3d5e831b632ce09384c906`. All full-base, four-point relation, scalar, phase and candidate-identity replays passed. The table and plot are derived from the versioned receipt and replay files listed in `plot_data.json`.

The next selection step is a fresh-point Tier 1 alternating same-point IC–rho comparison. The canonical IC/rho dashboard remains unchanged by this local control.