
Rejected metadata representation

Native instruction and allocation measurements · run-20261012T0543Z

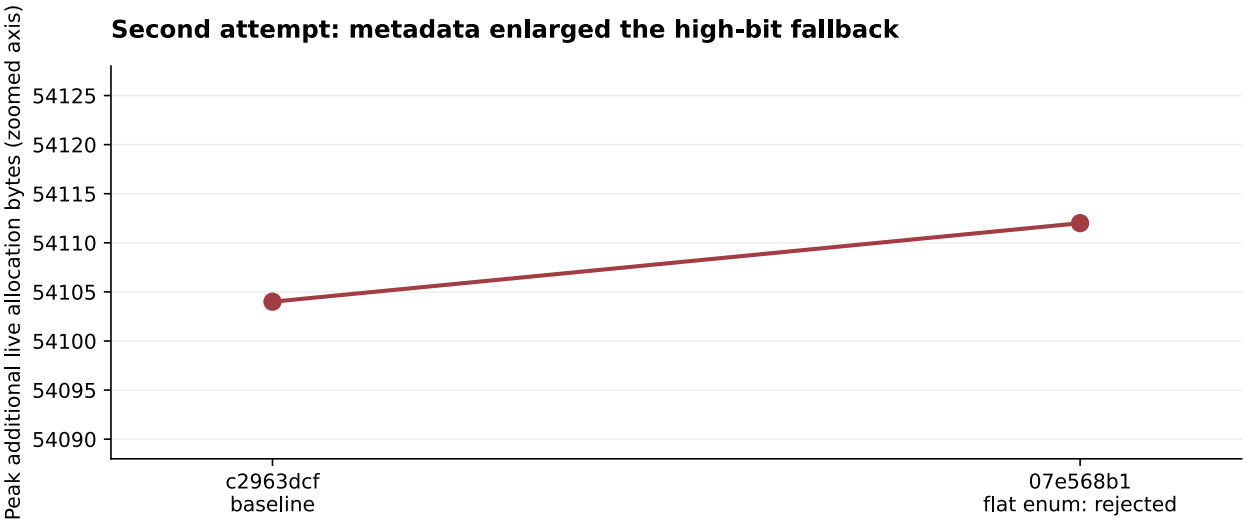

run-20261012T0543Z · Median of 3 primary high-bit F4 calls; confirmed in all 5 pairs.
Memory gate failed. Sources: records/attempt-2/comparison.json and native layout-probe.json.

The second implementation recorded 5.51% fewer F4 instructions and 11.03% fewer F5 instructions, but failed the memory gate. The high-bit fallback's additional peak grew from 54,104 to 54,112 bytes across all primary and paired calls. The native probe measured the original index metadata at 48 bytes, the flat three-way enum at 56 bytes, and a nested representation at 48 bytes. The heap-resident column layout accounts for the observed eight-byte increase. METADATA-FIX explicitly extended the two-attempt stop rule by one bounded correction and rerun. It preserved inputs and gates, added a metadata-size regression assertion and retained all failed results. The superseded full-library run was interrupted, not counted as passed.

Native sources: final comparison and raw-record hashes, frozen protocol, first rejection, bounded correction, gate scope, fixture repair, report and validation. Raw Callgrind dumps and Rust JSONL remain beside the data. Earlier segment: hashing study. Validation: 3,995 release-library tests passed, zero failed, 112 ignored; complete named coverage verified. The long ignored isogeny test passed separately. 46 Groebner/F4, 18 F5, 21 polynomial, 24 native coordinate and five comparison tests passed; Cargo examples and Clippy passed. Earlier failed/interrupted checks are retained. The inherited fixture-only repair preserves order rejection and strict parsing. Runtime and process RSS remain unmeasured.