
Per-case results and uncertainty

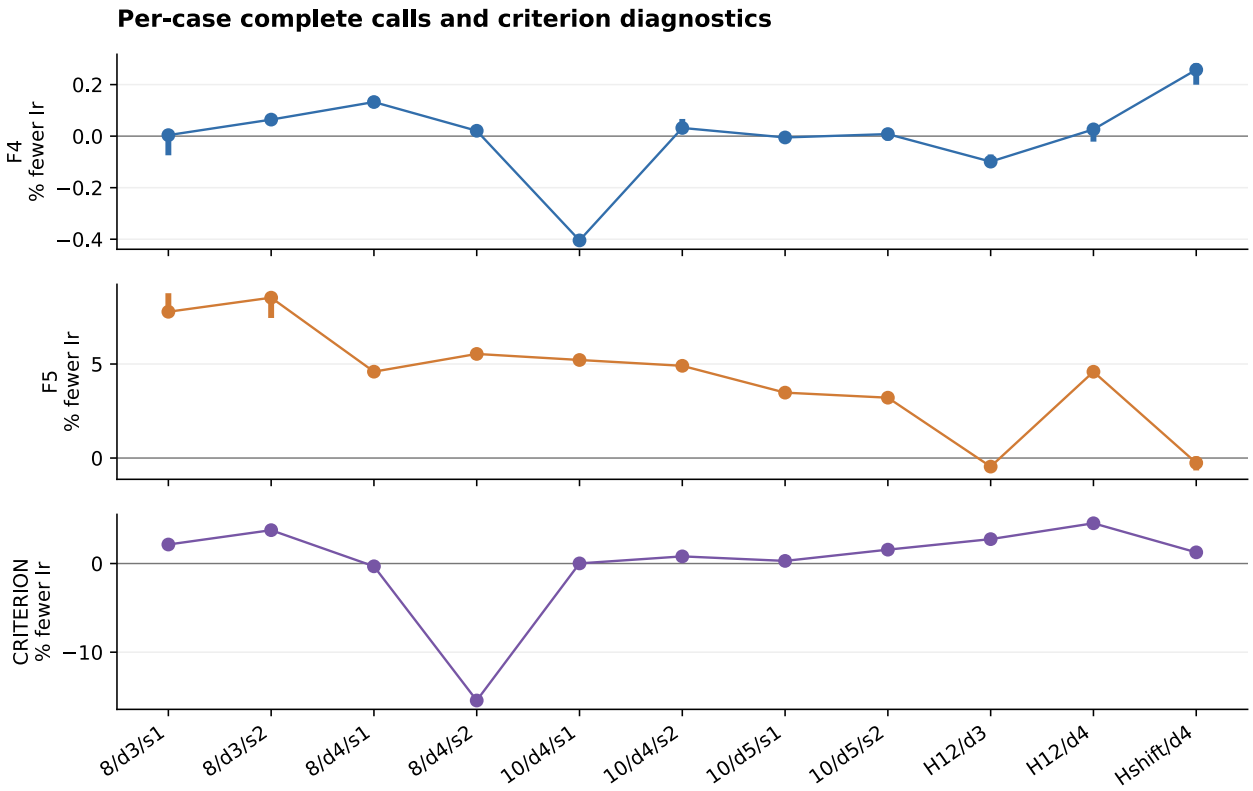

5 paired rounds; native reduction estimates and 95% bootstrap intervals. Positive = fewer Ir.
H = known frozen regression fixture; Hshift uses bits 52–63 and 6 multiplier variables.
run-20261012T1503Z · Source: records/comparison.json.

All eleven cases and all three arms are shown, including neutral and more-instruction verdicts. The frozen gate requires no complete-call regression, with standalone criterion Ir reported separately. Preregistered F5/ complete-call guard: True. Memory regression entries: 0. All case verdicts, including criterion regressions, remain in the native comparison.

Local validation: Release library: 3,996 passed, 0 failed, 112 ignored, exit 0, 238.05 s with loopback permission. Initial restricted run: 3,987 passed, 9 socket-permission failures, 112 ignored; retained. Focused suites: 47 Boolean Groebner, 18 F5, 21 PQ Groebner; 37 loopback checks; comparator 5 tests. All pass. Cargo example targets: 5 and 0 tests, both pass. Strict Clippy on both examples passes. Runtime ELF code/data equivalence passes.

run-20261012T1503Z; baseline 0677b1eb; candidate d56c96b9; AMD EPYC 9V74 Linux x86-64; Rust 1.99.0; Callgrind 3.24; one Rayon worker; 18 processes / 792 audited calls plus the 33-call hash control. No elapsed-time, process RSS or full-solver gain measured. Sources: native results and raw hashes, frozen protocol, report, local validation.