Native setup, query and retained-attempt cost ledger

Ledger snapshot 2026-10-17T18:00:10.162Z: 4600/4600 verified unique rho cases and 4520/4600 BSGS cases. It retains 5055 recorded attempts across 5053 logical jobs. This is cost accounting for the original frozen native workload; it does not rerun or alter the solvers.

BSGS table setup is charged once per recorded attempt. A completed ten-target batch records setup, online query wall/process CPU, external verification, destruction and whole batch elapsed. The nonnegative difference between the batch elapsed and closed phase timers is retained as worker overhead. The setup-plus-query cold cost and whole-batch/ten amortized allocation are explicitly derived values, not newly timed solves.


All repeated and interrupted attempts remain in attempts.json. 1 BSGS attempts lack a closed setup timer; 3 curves have an unclosed attempt in their history. Unknown interrupted work is not imputed as zero. Known phase sums are lower bounds on expended work wherever interrupted timers are missing. Completed results select one verified logical case; expended-attempt accounting also preserves repeated work.

All timings are CPU-only concurrent L0. Colors summarize measured cost, not intrinsic curve hardness or an isolated implementation comparison. No canonical ecbench S score or fastest-reference claim is made. Original native results, field-counted replay, mapping and order phases have distinct measurement boundaries. Full random-corpus IC recovery remains unresolved.

Sources: source/cost_ledger.mjs, source/phase_report.mjs, the original worker and its retained atomic attempt checkpoints. Public tables contain aggregate measurements and no expected/recovered scalars. The BSGS online chart uses one equally weighted query mean per available generator batch; its min/max describe those means. Exact individual query statistics remain in jobs.json and the native report.

BSGS table setup: all recorded attempts


One setup per attempt, including restart/rebuild attempts; missing interrupted timers excluded. Unit: seconds. Exact statistics and curve identities: bsgs_setup/graph_data.json.

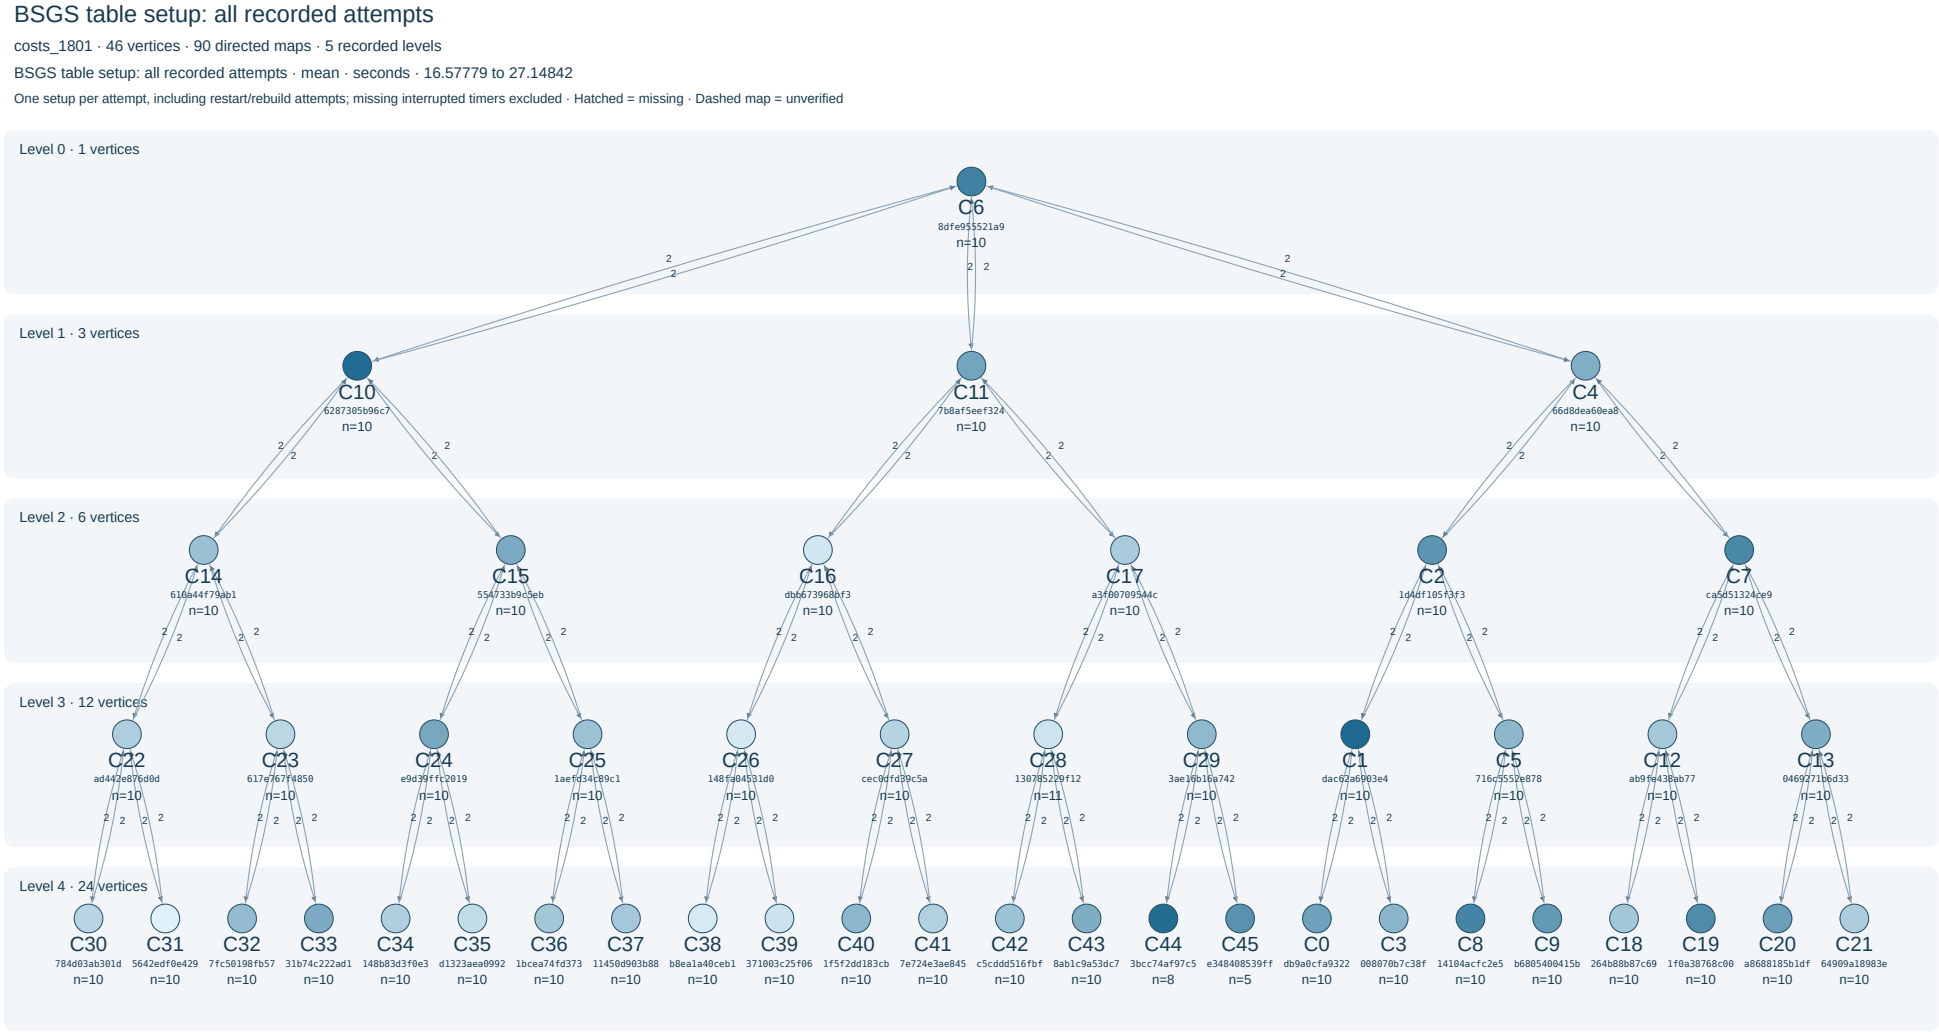

Full exact identities, map evidence and measurements: graph_data.json / interactive inspector.

BSGS successful ten-target batch: measured elapsed


Setup + ten online queries + validation + destruction + recorded worker overhead. Unit: seconds. Exact statistics and curve identities: bsgs_batch/graph_data.json.

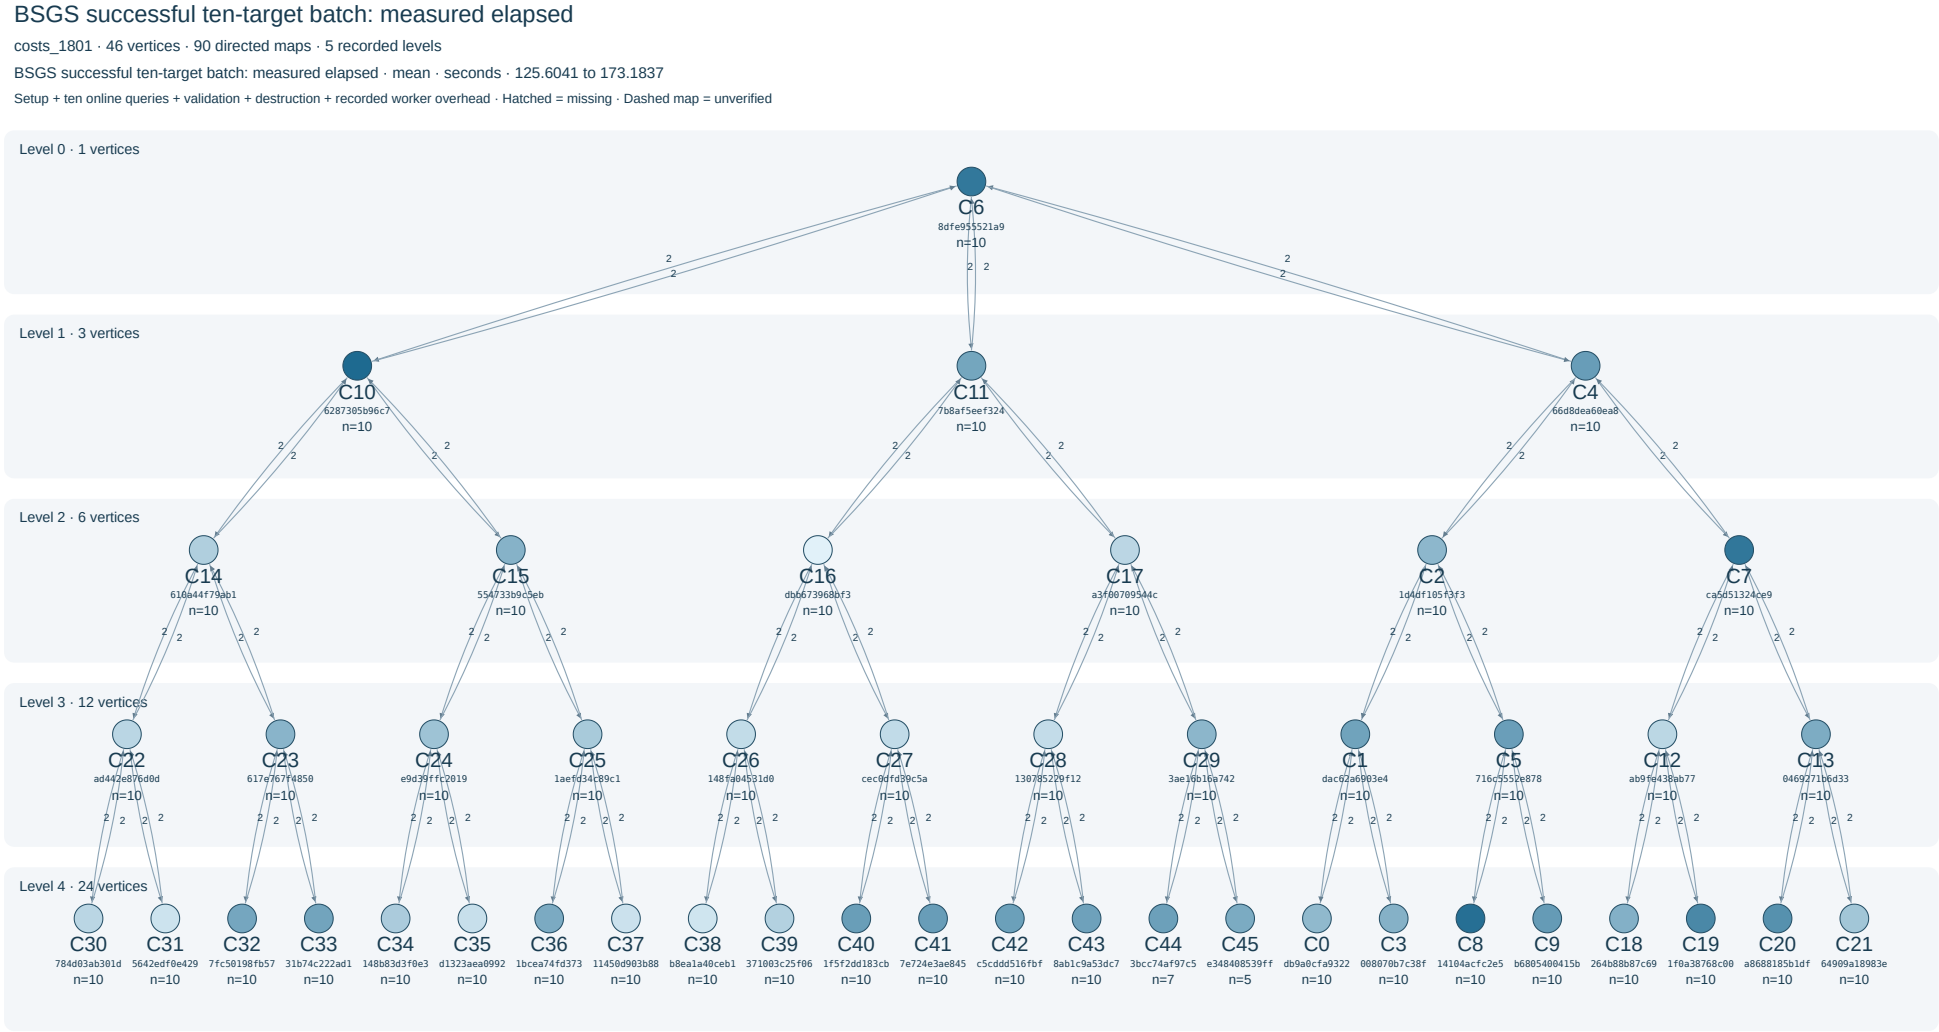

Full exact identities, map evidence and measurements: graph_data.json / interactive inspector.

BSGS batch cost divided by ten targets


Measured successful batch elapsed / ten; a derived allocation, not an independent measurement. Unit: seconds per target (derived). Exact statistics and curve identities: bsgs_amortized/graph_data.json.

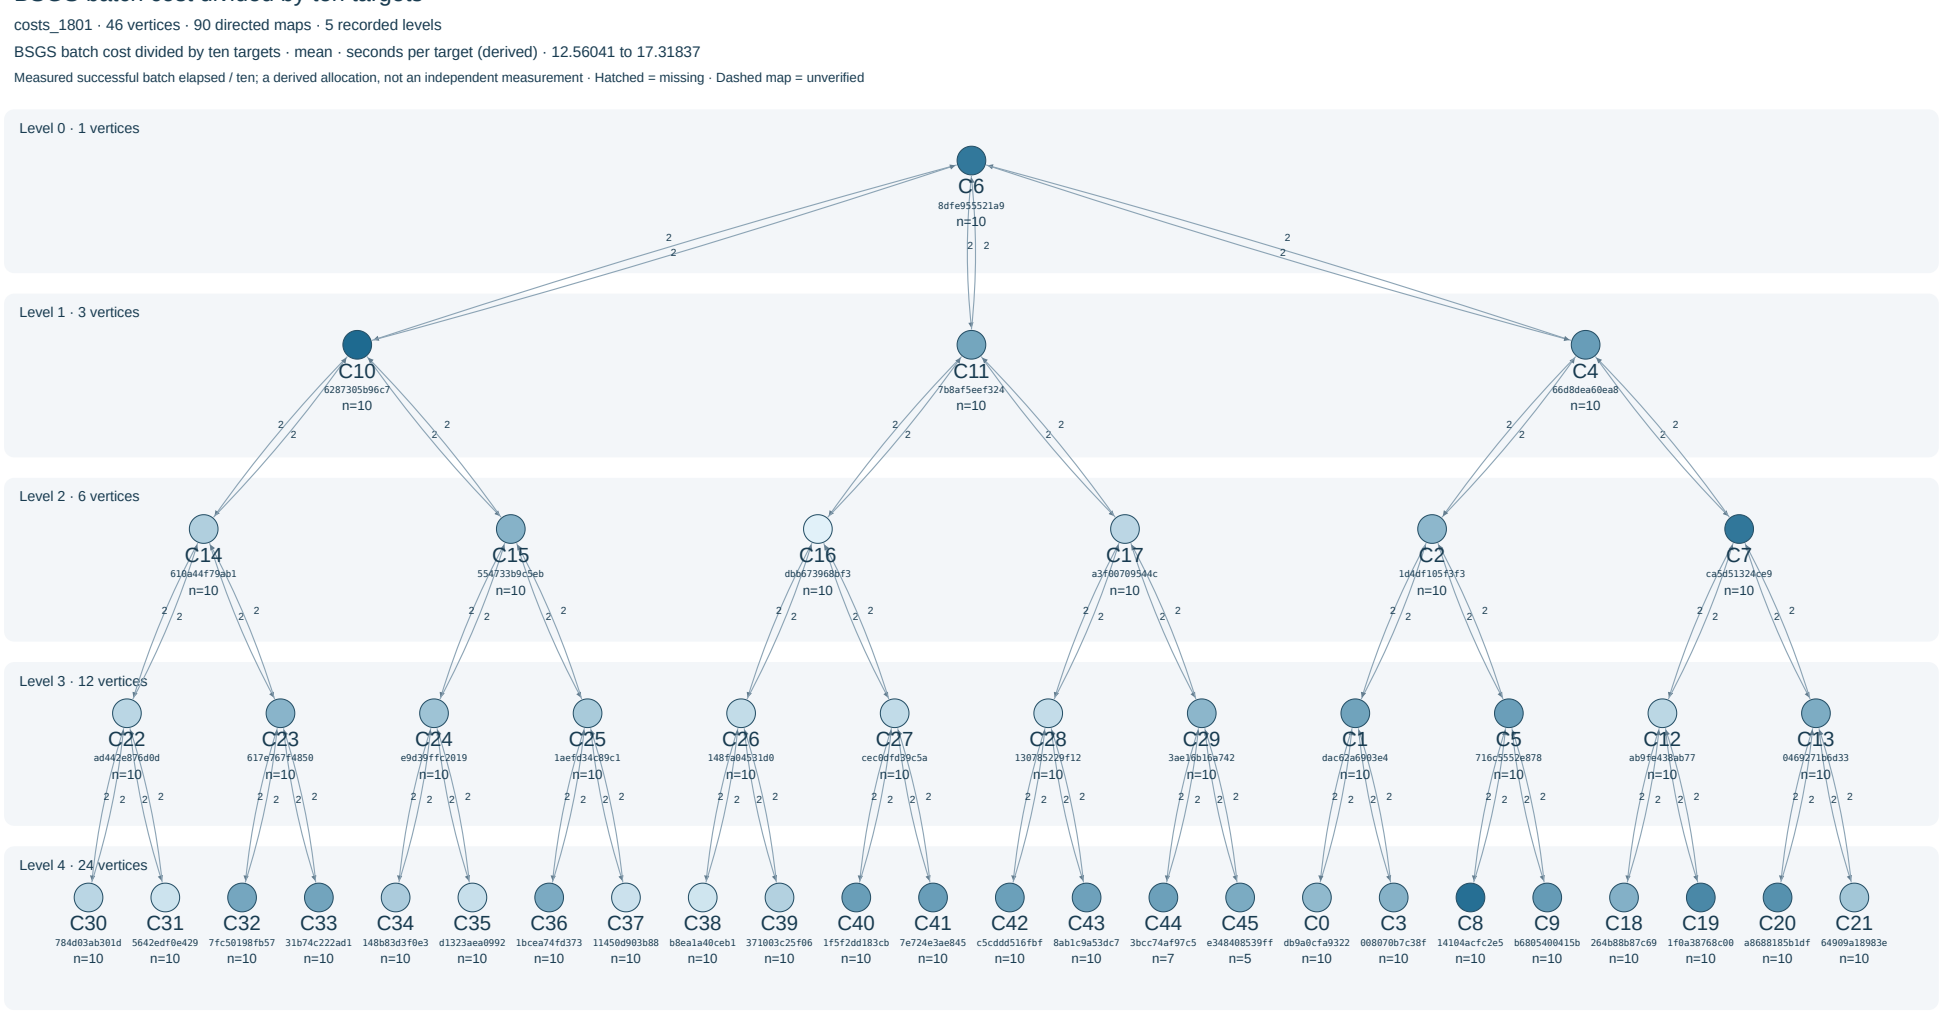

Full exact identities, map evidence and measurements: graph_data.json / interactive inspector.

BSGS online query: generator-batch mean elapsed

Equally weighted mean of available generator-batch query means; setup, validation and destruction excluded. Unit: seconds. Exact statistics and curve identities: bsgs_online/graph_data.json.

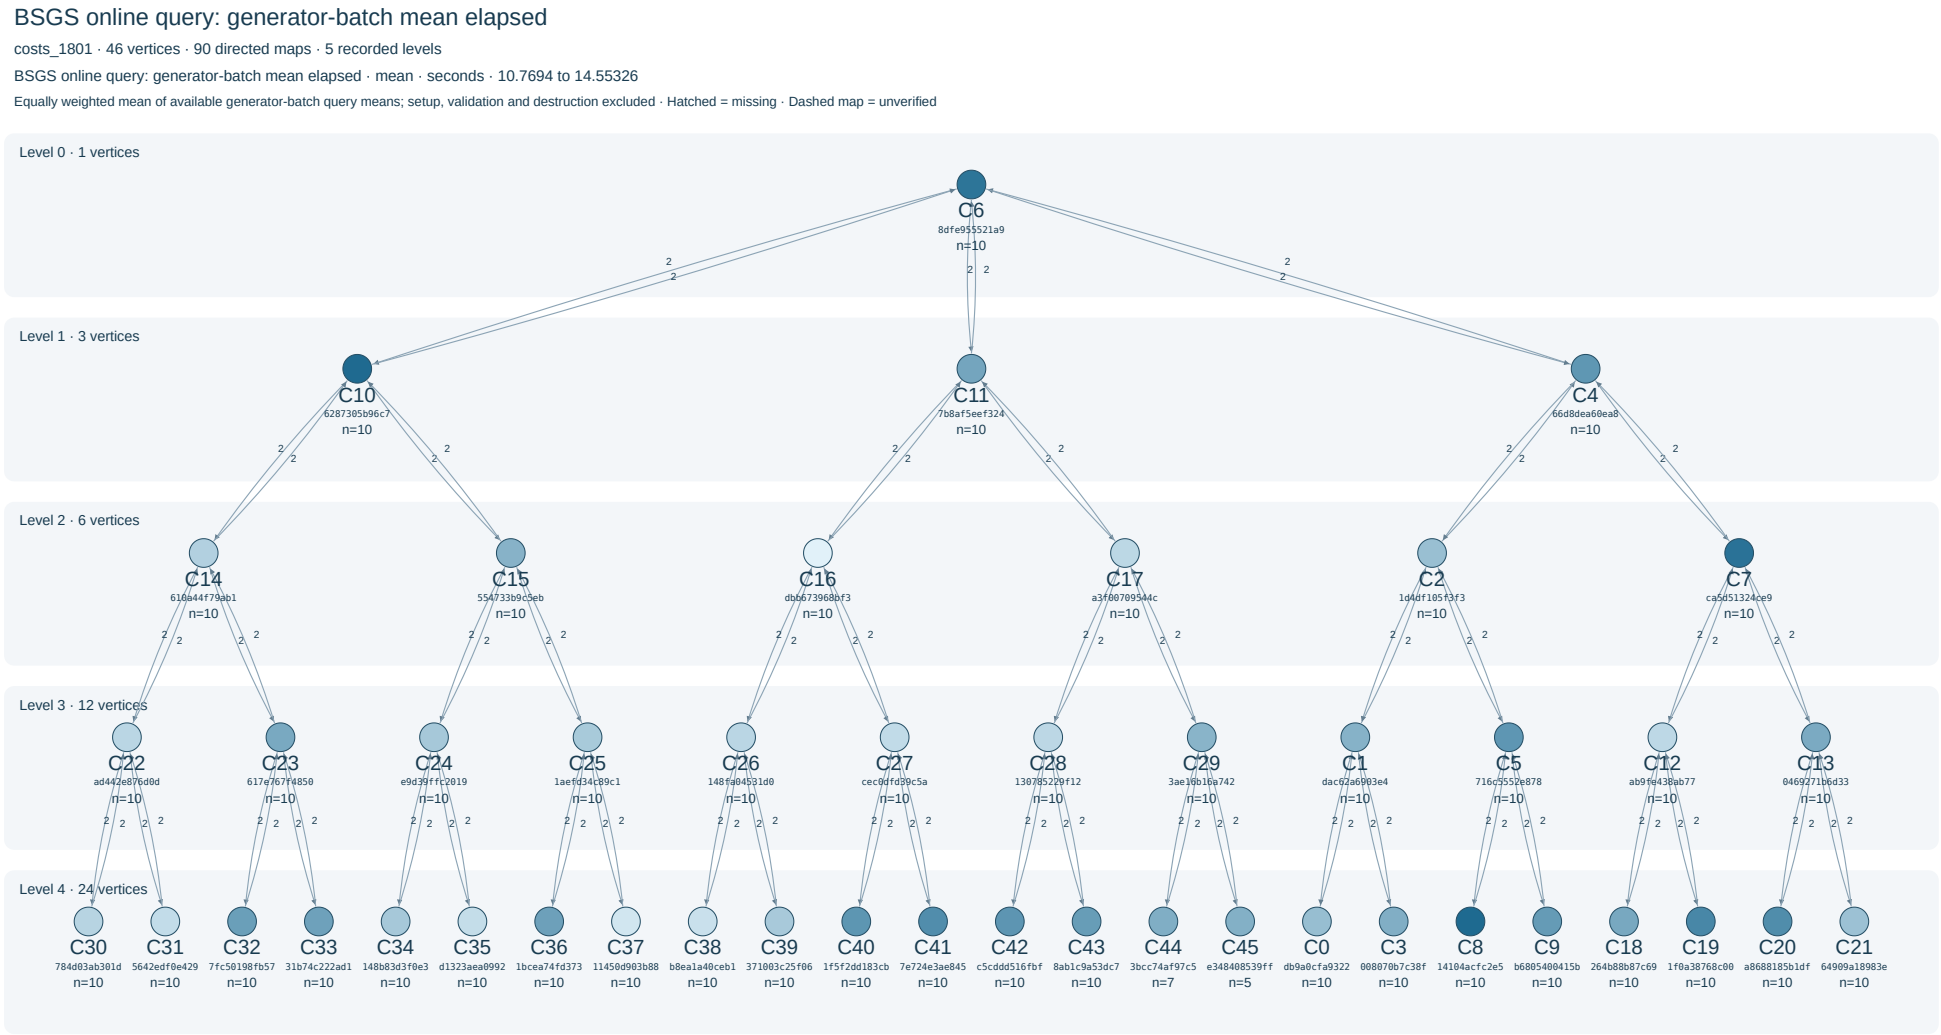

Full exact identities, map evidence and measurements: graph_data.json / interactive inspector.