Run report: amendment 1 grid, 2026-10-15T00:24Z (descriptive)

Run. `run_grid_amendment1.sh`: `ic_algebraic_floor run --m 4 --arms wide-chain` on seven cells, under `AMENDMENT_1.md` (frozen in commit `882598e55`). **Host.** Cloud container, Intel Xeon @ 2.10 GHz, 4 vCPU. Isolation L0: the only grid running, one thread per solve. **Time.** 00:24–01:05 UTC. **Workload.** Seed 20261014 and a 1,024-target pool (the same targets as `runs/m4/`). 6 decomposable and 6 non-decomposable targets per cell. Per target: 120 s and 4 GiB.

This report records observations only; the verdict is in the study README and `REPORT.pdf`.

Solves

- **Totals over 84 solves:** 40 `yes` and 30 `no`, every one agreeing with ground truth; 14 `timeout`, killed at budget + 15 s.
- **Censoring:** every non-decomposable target at $n = 29$ and 31 timed out, plus one decomposable target at each. At $n = 31$ a further decomposable target returned `yes` only after 130 s, past the budget, so the analysis counts it as censored: 8 of 12 there, 7 of 12 at $n = 29$.
- No crashes, unsupported cells or early stops.
- The floor equals exhaustive enumeration on 12/12 targets on every cell with $n \leq 23$.

n	d	p	floor	wide-chain
11	3	0.009	18.09	27.20 [26.45, 28.42]
13	4	0.562	14.99	26.05 [25.81, 26.27]
17	5	0.181	16.96	29.85 [29.62, 30.10]
19	5	0.093	18.37	32.27 [31.99, 32.59]
23	6	0.026	21.06	35.96 [35.45, 36.63]
29	8	0.281	21.68	≥ 38.58
31	8	0.082	23.48	≥ 40.52

Values are $\log_2$ wall ns per relation, with 95% bootstrap intervals (`amendment-1/ANALYSIS.json`).

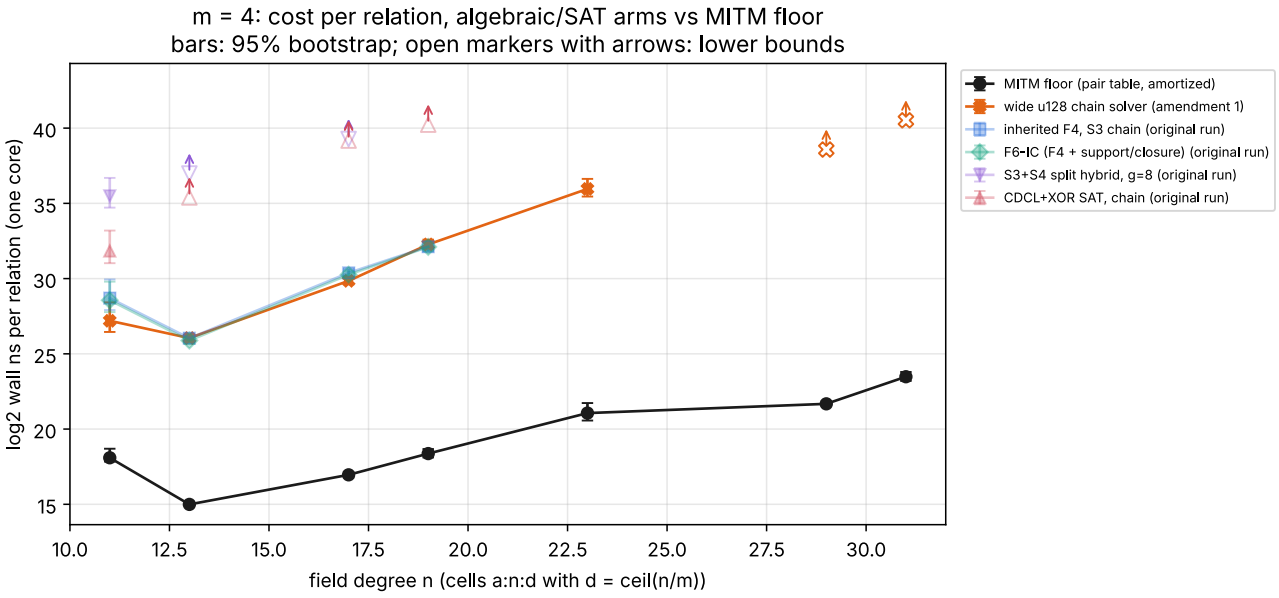


Figure 1: $m = 4$ with the wide solver; the original run's arms are shown faded. Open markers with arrows are lower bounds.

Raw records: `runs/m4-wide/` and `runs-m4-wide.log`.