
1. Genus-128 GHS source-lock refresh

Run `run-20261015T0929Z` · 15 October 2026

The current-main curve and Jacobian-transfer registries were copied byte-for-byte into the branch before rebuilding the WeakCurves snapshot and native GHS audit. Their SHA-256 hashes are `85300a415cfaef50e561a09fe8e0be56fb2b6ecc93babf5906a0d0d91c90d5fc` and `ddc14e19741f017ef3880d004906f355053abd1499f23a8ad8f433642cb2f21d`. The prior clean Linux PR merge checkout had used these newer source bytes and rejected the older snapshot; its failed job log is retained.

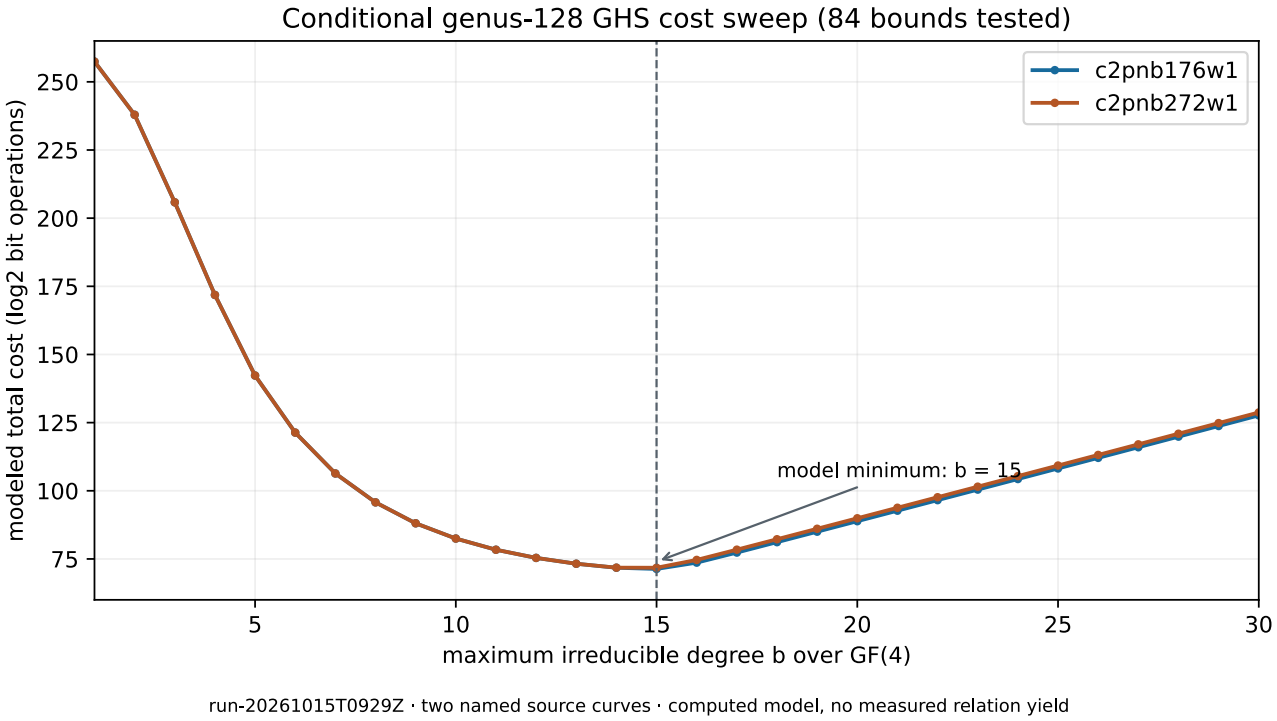

run-20261015T0929Z · two named source curves · computed model, no measured relation yield

Figure 1: Recorded conditional cost sweep after the source-lock refresh. Both named routes select degree bound 15.

Source curve	Model log2 queries	Model log2 total	Nominal base
`c2pnb176w1`	51.872229	71.336033	48,921,052
`c2pnb272w1`	51.872229	71.773568	48,921,052

The 84-bound sweep is numerically identical to the first run. Only the source hashes changed. These are cost-model outputs under the half-split-place, polynomial-smoothness, and operation-price assumptions; the current receipt retains null fields for actual usable places, ordinary-query relation yield, useful rank, and target descent.

Evidence: `research/weak_curve_leaderboard_20261012/ghs_genus128_cost_audit.json`; first-run receipt in `reports/run-20261015T0854Z/`; clean-runner failure in `validation/ghs128_ci_snapshot_mismatch_attempt1.log`. Reproduction: native `--check`, catalog snapshot `check`, graph and decomposition index `--check`, and the 81-file SHA-256 manifest. This refresh changes provenance only and adds no curve-level finding or explicit isogeny map.