A19: the huge-page filter with the folded build's 64 partitions

Exploration, no round. v8 (`ic-r12-v7-23138d20`) against A17's huge-page filter plus the folded build's 64 partitions (`ic-a19-v8-6c998fb0`, `candidate.patch`). Run 2026-10-17 06:44–07:02 UTC: 72 isolated processes, none contended; every logarithm the same in both arms.

Outcome:

- **2^44.3:** 1.067.
- **2^47.2:** 1.054.
- **2^44.5:** 1.014 [0.978, 1.051]. Its collection does not respond, as in A16 and A17.
- **No round.** A round accepts only if each size's interval has its lower end above 1.03 (`icprog`'s `bound_reasons`), and 2^44.5's lower end is below 1.

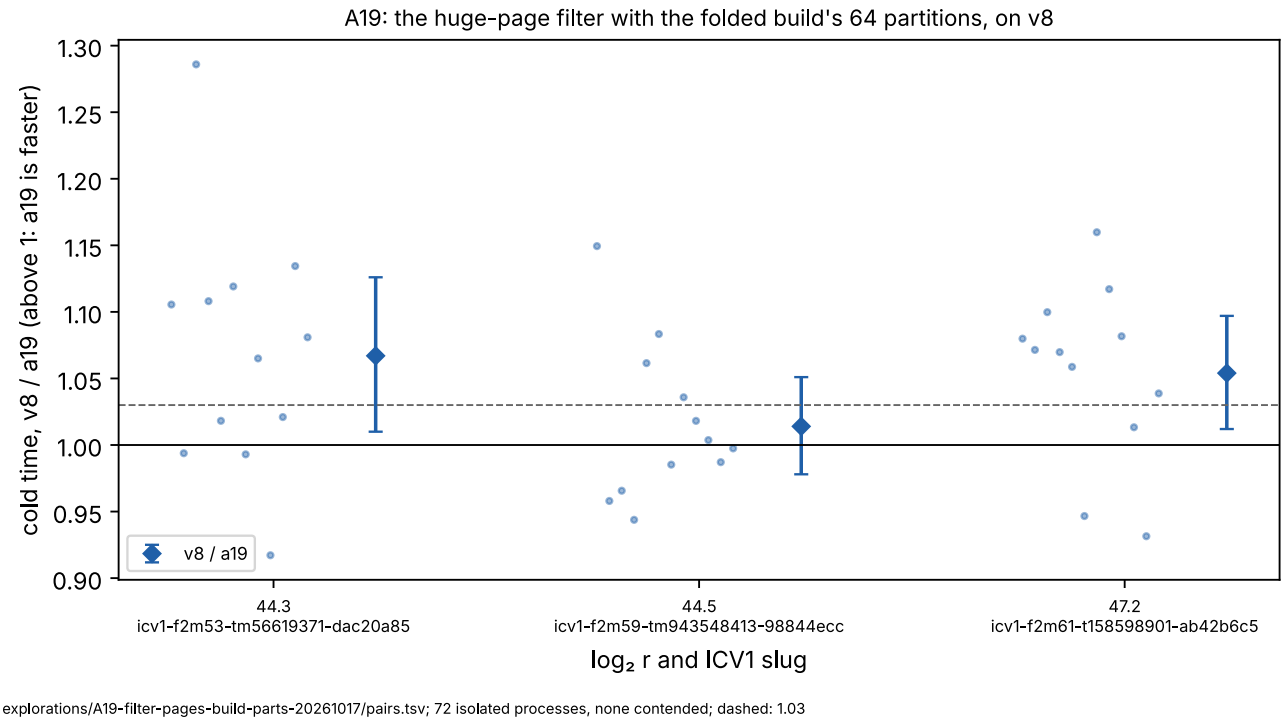

explorations/A19-filter-pages-build-parts-20261017/pairs.tsv; 72 isolated processes, none contended; dashed: 1.03

Figure 1: Cold time, v8 over a19, per pair, with the geometric mean and 95% t interval. Dashed: 1.03.

curve	$\log_2$ r	v8 / a19 [95%]	collection	build	selection
`icv1-f2m53-tm56619371-dac20a85`	44.3	1.067 [1.010, 1.126]	1.045	1.096	1.091
`icv1-f2m59-tm943548413-98844ecc`	44.5	1.014 [0.978, 1.051]	1.003	1.048	1.025
`icv1-f2m61-t158598901-ab42b6c5`	47.2	1.054 [1.012, 1.097]	1.071	1.014	1.015

The build-timing diagnostic (`partbits-sweep.tsv`; single processes; not a measurement): per stored pair, add and key cost about 8 ns, the append into the streams 12–13 ns, and the place step 9.5–11.6 ns. With 64 partitions the append is about 30% cheaper.

Scope: one host, one core, three sizes, two rows a size.