
1. Exact-integer genus-128 GHS model audit

Run `run-20261015T0854Z` · 15 October 2026

The native audit replays the source-locked conditional cost model for the GF(4) Type II, magic-eight routes of `c2pnb176w1` and `c2pnb272w1`. It counts monic irreducibles and degree-128 smooth monic polynomials exactly across 84 factor-degree bounds. Both routes select bound 15 and 48,921,052 nominal half-split places.

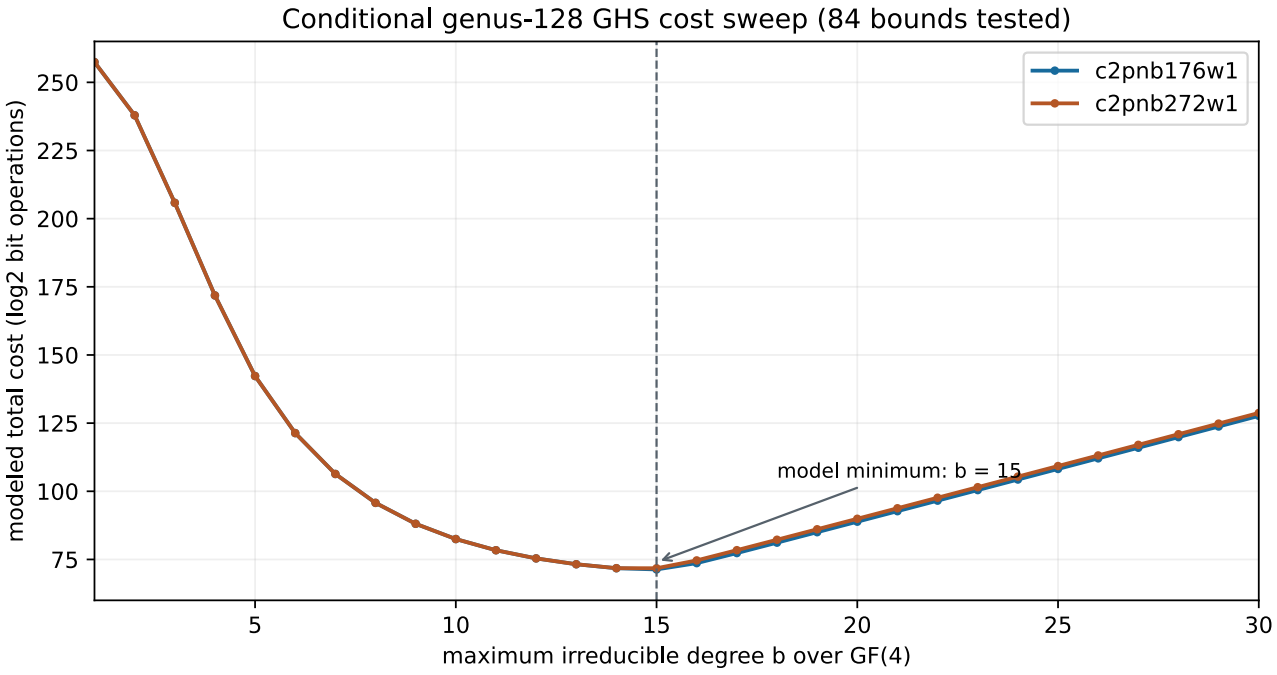

run-20261015T0854Z · two named source curves · computed model, no measured relation yield

Figure 1: Recorded model cost by factor-degree bound. Two named curves; no measured relation yield.

Source curve	Model log2 queries	Model log2 total	Nominal base
`c2pnb176w1`	51.872229	71.336033	48,921,052
`c2pnb272w1`	51.872229	71.773568	48,921,052

The exact smooth numerator is `13742885458193659985879405484424453183554695889922052474037090400670 02` over `4^128` monic polynomials. The model assumes half the base irreducibles yield usable divisor places, monic-polynomial smoothness predicts divisor smoothness, and the registry's operation prices and sparse linear algebra apply. Actual usable places, ordinary-query relation yield, useful rank, and target descent are unmeasured fields in the receipt.

Source: this run's `ghs_genus128_cost_audit.json`, with transfer-registry SHA-256 `4806c1be25d226f1946fcb52d358fbd712ce194a8997262328210733111334 44a`, and `src/cryptanalysis/jacobian_transfer/cost.rs`. Producer: `research/weak_curve_leaderboard_20261012/src/bin/ghs_genus128_cost_audit.rs`. The previous Python model receipt is archived in `preliminary_python/`; this run's receipt is native Rust. A later source-lock refresh changed only source hashes, not these model outputs.

The next gate is a smooth magic-eight cover with certified selected-subgroup image, actual divisor places, measured ordinary-query relations and rank, final linear algebra, and target descent. The conditional model does not add a curve-level finding or alter the isogeny graph.