ECC2K130 iteration redesign: two-worker aggregate confirmation

Run date: 2026-10-12. This report records a fresh RunPod aggregate throughput confirmation from the open iteration-redesign PR. It does not promote the v3 table walk to the DP32 campaign.

Result

The 30 B/s objective is reached in aggregate with two independent RTX PRO 6000 Blackwell Server Edition workers running the audited shipping -table preset:

worker	median	range	verification
A, RunPod pod ‘w7w5h1nz5nh5fo‘	15.994424 B/s	15.980796–16.014132	300/300, 0 dropped
B, RunPod pod ‘q43dhtqgu21c9w‘	15.760478 B/s	15.739614–15.783810	300/300, 0 dropped
aggregate	**31.754902 B/s**	—	**600/600, 0 dropped**

The aggregate is **1.754902 B/s (5.85%) above** the 30 B/s target. This is an aggregate result across two GPUs, not a claim that one GPU reaches 30 B/s.

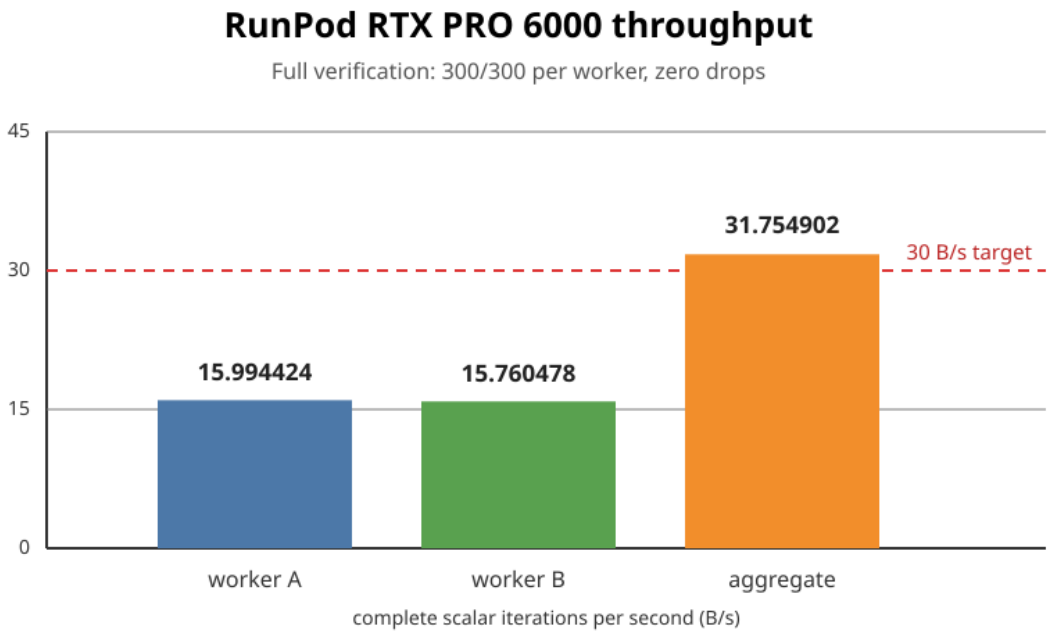


Figure 1: Throughput confirmation

Exact inputs

- Repository: ‘https://github.com/aburan28/crypto.git‘
- Branch: ‘codex/dp32-dp34-status-tabs‘
- Source revision: ‘c10182d4a66550e04bb41168ba76e10446874e30‘
- GPU SKU: ‘NVIDIA RTX PRO 6000 Blackwell Server Edition‘

- Worker A: 188 SMs, CUDA 13.3.73, driver 595.91.07, 2.430 GHz max
- Worker B: 188 SMs, CUDA 13.3.73, driver 580.173.02, 2.430 GHz max
- Build preset: ‘make -B gpu-rtx-pro6000-sigma-table PRO6000_ARCH=“-gencode arch=compute_120,code=sm_120”‘
- Verification: ‘–curve 131 –packed –dp-weight 50 –dp-cap 262144 –steps 16 –launches 6 –verify 300 –run-id 35‘
- Timing: ‘–curve 131 –packed –bench –steps 64 –launches 4‘, three repeats per worker, no DP reporting in the timed invocation
- Harness: ‘ecc2k130/benchmarks/iteration-redesign/sigmajob.sh‘

The exact worker receipts and selected log lines are retained in ‘raw/worker-a.md‘ and ‘raw/worker-b.md‘.

Relationship to the redesign

The same commit’s full tuned v3 table-walk redesign was also screened on the requested RTX PRO 6000 and measured **8.241422 B/s** median, with its verification gate passing. The two-worker result therefore establishes a practical 30 B/s aggregate using the shipping -table path; it does not establish a 30 B/s single-GPU result for the new v3 table walk.

The benchmark workers were run with ‘–bench‘; they did not write campaign DPs or alter the DP ingester. The redesign remains opt-in and separate from the live DP32 corpus.

Reproduction and decision

The tracked ‘sigmajob.sh‘ harness derives the architecture from ‘nvidia-smi‘, records source and host receipts, performs the 300-report reference replay, and suppresses timing on any correctness failure. The two pods exited successfully and were terminated after artifact upload.

Decision: **30 B/s achieved for the two-worker aggregate objective; single GPU v3 redesign objective remains unmet.**