
Criterion instruction diagnostics

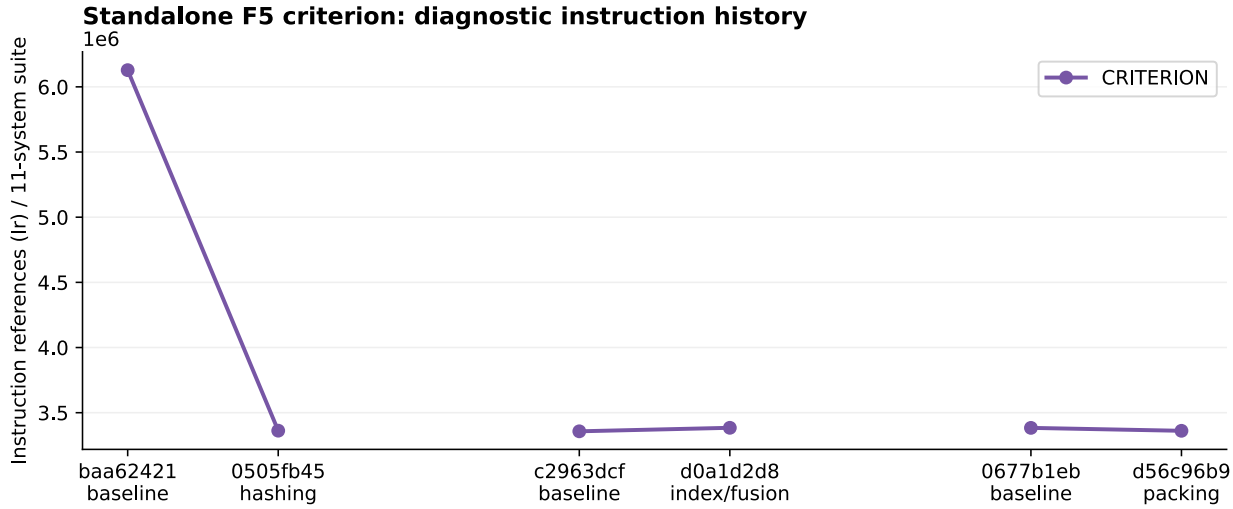

Three independently matched episodes; gaps do not imply cumulative gains.
Each endpoint: 5 native paired samples and median; complete merged-worker dumps. run-20261012T1503Z

Criterion construction is measured separately from complete calls. One n8/d4/s2 case records 15.4494% more instructions; the cause is not established. Unchanged source does not establish unchanged generated instruction costs. F4: 93,241,594 to 93,258,282 Ir; paired reduction −0.0199% (95% CI −0.0258 to −0.0109%); neutral. F5: 82,213,799 to 78,971,828 Ir; paired reduction 3.9472% (95% CI 3.9239 to 3.9574%); fewer instructions. CRITERION: 3,383,582 to 3,361,188 Ir; paired reduction 0.6618% (95% CI 0.6618 to 0.6754%); neutral.

Local validation: Release library: 3,996 passed, 0 failed, 112 ignored, exit 0, 238.05 s with loopback permission. Initial restricted run: 3,987 passed, 9 socket-permission failures, 112 ignored; retained. Focused suites: 47 Boolean Groebner, 18 F5, 21 PQ Groebner; 37 loopback checks; comparator 5 tests. All pass. Cargo example targets: 5 and 0 tests, both pass. Strict Clippy on both examples passes. Runtime ELF code/data equivalence passes.

run-20261012T1503Z; baseline 0677b1eb; candidate d56c96b9; AMD EPYC 9V74 Linux x86-64; Rust 1.99.0; Callgrind 3.24; one Rayon worker; 18 processes / 792 audited calls plus the 33-call hash control. No elapsed-time, process RSS or full-solver gain measured. Sources: native results and raw hashes, frozen protocol, report, local validation.