Independent-host result and remaining gates

GitHub Actions run 38831567671 · 2026-10-16.

The separate Linux x86-64 VM completed all 252 frozen cold children at subgroup orders 421, 433 and 457. Its independent checker replayed 5,355 scalar outputs and 37,061 relation witnesses. The native host analyzer matched every child arithmetic vector to the Darwin result before deriving process CPU ratios. The complete downloaded artifact is stored as a 1,330,324-byte archive with a verified 1,533-file manifest. The source-linked report, command and hashes are in `REPORT.md` and `linux_host_v1/README.md`.

At 64 public targets, median full-image/rho process CPU ratios over three paired rounds were 68.750 at order 421, 56.331 at 433, and 59.050 at 457. Full-image/BSGS medians were 135.798, 109.094 and 114.506; rho/rho-A/A medians were 0.994, 1.006 and 0.994. The graph plots the medians and observed round ranges, all in a single dimensionless CPU-ratio unit.

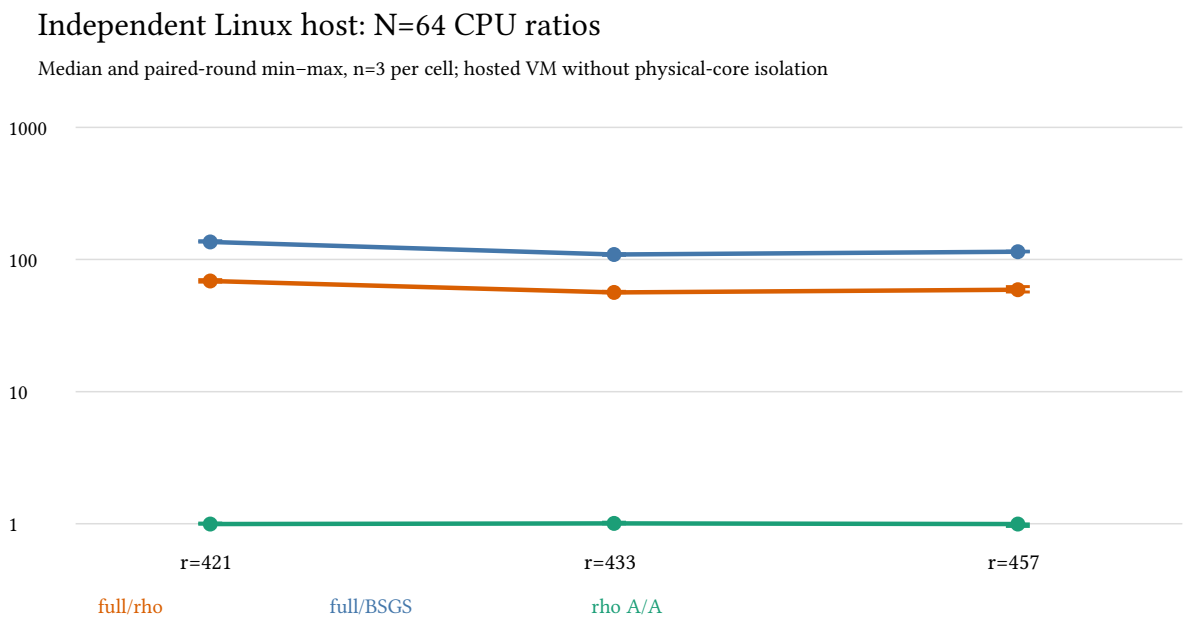

This completes a different-host correctness and descriptive CPU replay for the three four-order panel cells. It does not provide a reserved-core L2 wall measurement or a complete portable addition-equivalent price. The order-1,201 Linux replay is frozen separately. The direct `chi`-coordinate resultant/root oracle remains the structural next test.