Boolean solver calls: F4 and F5

Shared K_1 / 2^17 m=2 workload, 16 Boolean variables, four planted and four random targets, maximum degree 3. The solve_boolean_system entry point, including root readback.

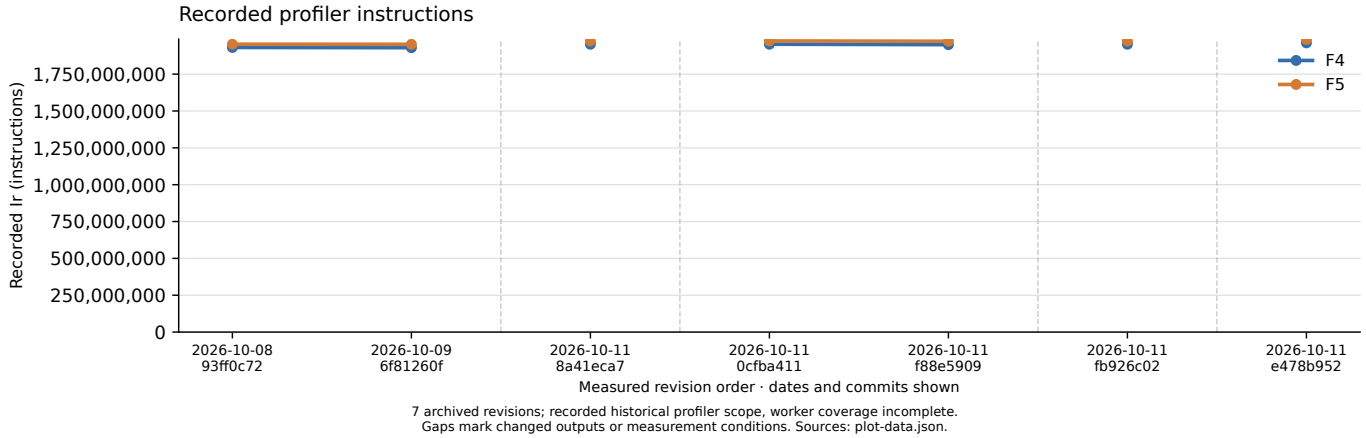

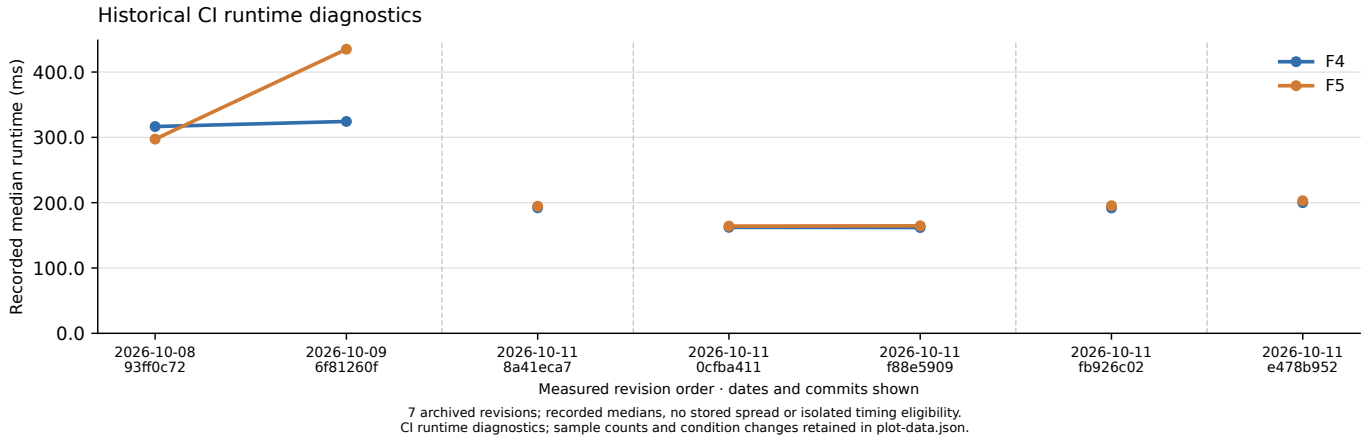

UTC date / revision	F4 Ir	F5 Ir	F4 ms	F5 ms
2026-10-08 / 93ff0c72	1,930,989,200	1,953,108,992	316.570	297.297
2026-10-09 / 6f81260f	1,929,374,570	1,952,598,745	324.403	435.004
2026-10-11 / 8a41eca7	1,953,021,023	1,974,789,730	192.203	194.561
2026-10-11 / 0cfba411	1,953,020,766	1,975,267,516	162.266	164.161
2026-10-11 / f88e5909	1,949,981,977	1,973,219,339	161.982	164.584
2026-10-11 / fb926c02	1,953,020,766	1,974,789,781	191.988	195.374
2026-10-11 / e478b952	1,962,376,386	1,985,422,672	200.058	202.996

Historical Python-orchestrated perf.history/v1 snapshots; no new performance run or speedup claim.

Runtime: one recorded median per kernel and revision; sample counts retained per point, no stored spread, no isolated timing eligibility. Runtime is diagnostic.

Profiler Ir is the recorded historical scope. Worker-thread coverage is incomplete for these kernels; it is not a complete solver operation count.

Lines stop at missing values, changed output fingerprints, or changed host/compiler/harness/profiler. Different algorithm fingerprints are expected and are not equated.

X positions are measured revision order, labelled with UTC commit date and revision; spacing is not elapsed time.

Evidence: 7 imported perf.history/v1 snapshots; historical_sources in plot-data.json retains raw filenames, SHA-256 hashes, hosts, harnesses and sample counts. Source data and provenance: plot-data.json and REPORT.md. These plots do not establish an end-to-end ECDLP gain.