Order 1,201: complete recovery and counted trend

The frozen first eligible different-j cell is $(p, r, h) = (1237, 1201, 1275)$. The independent full-fiber audit checked 1,531,275 source points, 510,425 three-point image fibers and all 1,442,401 ordered subgroup pair identities. The seven-arm batch then completed 84/84 cold children, 1,785/1,785 scalar replays and 12,486 independently checked relation witnesses.

$S_{\text{group}} = \frac{\text{adds+doubles}}{N\sqrt{r}}$ includes common validation, setup, every target query and final verification. It is the same counted unit for all seven arms and a **lower bound** on complete portable S. At $N = 64$, medians of three rotated rounds:

Arm	Median S_{group} per target
Source projected relations	153.842
Isogeny-image relations	162.213
Destination-direct relations	139.075
Full rational-image relations	1,532.302
Reusable source BSGS	1.315
Source negation rho	4.071
Rho A/A repeat	4.071

Paired full-image/rho median group ratio: 376.364; against BSGS: 1,165.090. Full image exceeds both in group counts, Fp multiplications and inversions in every prefix and round. Fp axes overlap group calls and are not added to the table.

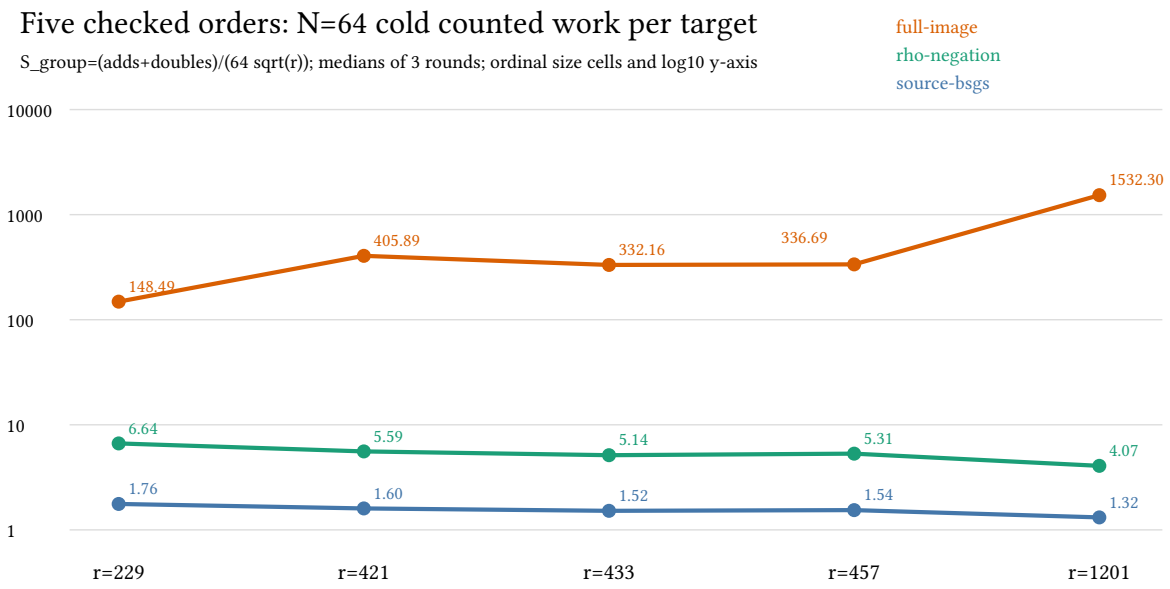

Source: 420 checked cold children, 8,925 scalar replays. Nonarithmetic work remains unpriced; L0 host timing is separate.

Relation support and remaining gates

The five-order derivation rechecks 420 children and 8,925 scalar outputs. Orders 229, 421, 433, 457 and 1,201 span 5.24x, but the field prime/cofactor vary and three cells cluster near 430. The fitted exponent is unset. At order 1,201 the full-image/destination support was 122/128 keys. Full image returned 2,316 relations in 23,413 trials; direct destination returned 2,328 in 21,653. Full image scans all 1,531,275 rational source points in each cold child. Its largest N64 peak RSS was 206,864,384 bytes below 512 MiB.

Shared-host N64 median CPU was 2.724 seconds for full image, 3.784 milliseconds for rho and 0.954 milliseconds for BSGS. These are L0 descriptions, not admitted isolated wall results.

Complete portable S still requires disjoint native counts and pinned cross-host conversion for field work outside group calls, square-root branches, hash/table probes, row algebra, allocation and I/O. Physical-core isolated wall with A/A, independent-host performance replay, and a broader order trend remain separate. The direct chi-coordinate resultant/root oracle is the structural next test: match exhaustive decompositions and recover the same targets without the full rational-source census.

Source-linked evidence and exact commands: `RESULTS.md`, `BATCH_RUN.md`, `RUN_SPEC_V2.json`, `TREND_FIVE_V2.json`, the run JSONL and independent replay JSON. The failed V1 target freeze and the V1 figure with its overlap are preserved.