Extended different-j order screen

Run and independent replay, 2026-10-15. The committed protocol fixed prime range 619–1601, $p = 1 \bmod 3$, selection $r \geq 1009$ and $r \neq p$, the first accepted row, a 600-second wall cap and 512 MiB resident cap. Host: Darwin arm64 shared L0. The exact Rust source/binary hashes, commands, raw rows, exit codes and checker receipt are in `PROTOCOL_V1.md` and `SCREEN_RUN.md`.

All 68 candidate rows were emitted. Eight passed the construction conditions. Independent Rust formulas replayed 512/512 seeded map-law witnesses and reproduced the first selected cell: $p = 1237, r = 1201, h = 1275$, with $j_{\text{source}} = 1066$ and $j_{\text{destination}} = 727$. Both screen and checker exited 0.

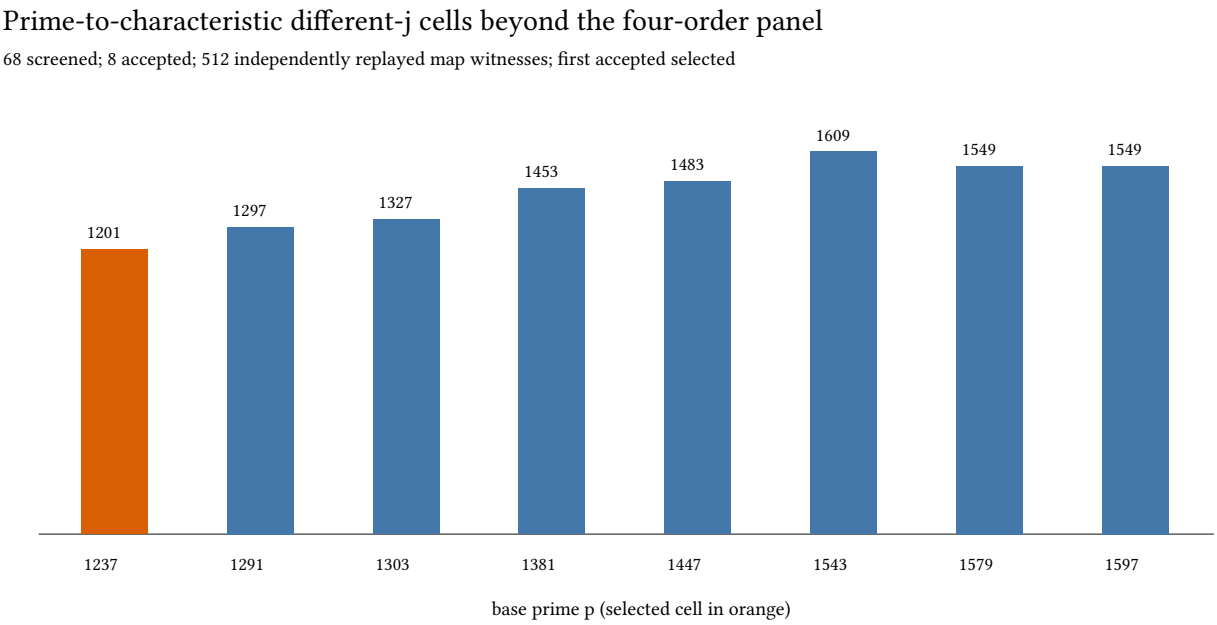

The screen establishes a bounded construction and fixed selection. Exhaustive rational-fiber, subgroup map-law and complete seven-arm same-target recovery remain separate checks. Group-count pricing, complete portable S, isolated wall timing and independent-host performance have their own gates.