V1 pairing-transfer run receipt


2026-10-15 05:46:11–05:46:14 UTC · shared Darwin 25.6.0 arm64 · L0

The frozen source commit was `47deb8dccaff455c41500a00b99bf208c5ab2a0c`. Source SHA-256: `a9ffa68da164d7d3fb72f48665f935971c2a340f59d70b6d9f5a76d0ee7c4ff1`. The answer-free input hash, selected pairing points, and executable hash are in `../../FREEZE.md`. `../../RUN.sh` fixed the 30-command schedule before execution.

Three rounds each used the public subgroups $(p, r) = (61, 19)$ and $(271, 61)$. Pairing, separate scalar replay, checks on multiples 2, 3 and 5, matched negation rho, and rho A/A completed in every round. The pairing solver returned 12 and 10; six separate source-curve replays confirmed $[k]G = Q$. All 18 extra pairing checks and all 12 rho controls passed. The exit/status and stderr records under `../../runs/` contain no failure.

(p, r)	Pairing full CPU	Rho CPU	Paired ratio
$(61, 19)$	115.974 ms	28.375 µs	4,087.19×
$(271, 61)$	26.117 ms	36.666 µs	646.82×

Values are three-round medians. The paired ratio is a median of same-round ratios; the source Markdown gives each min–max range and phase ledger.

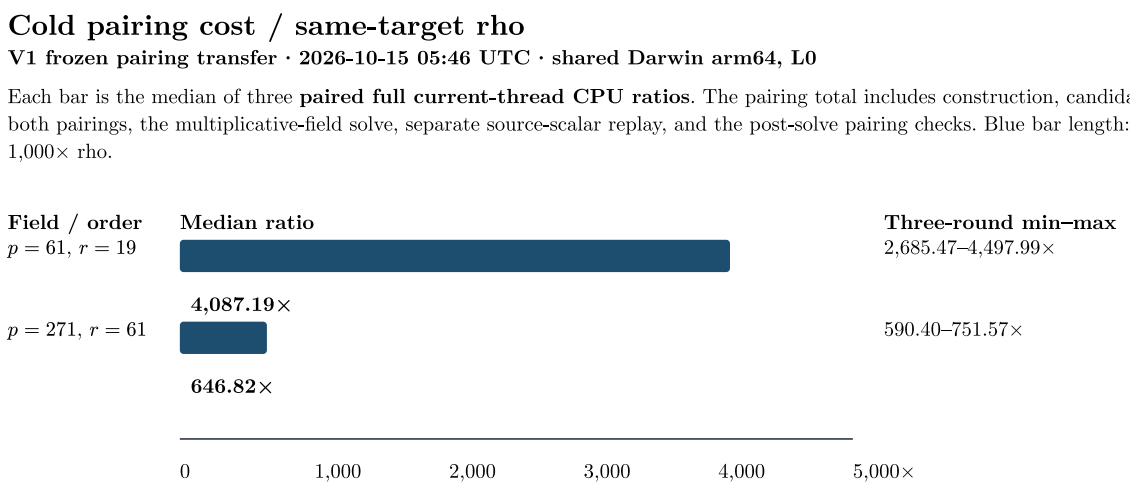

The graph source is `GRAPH_V1.typ`; it uses `../../SUMMARY.json` and the hash-pinned raw records in `../../runs/`. The pairing total includes cold construction and selection, field solve, independent scalar replay, and post-solve pairing checks. V1 combines candidate search, Miller evaluation, and final exponentiation into one selection phase. `../../AMENDMENT_V2.md` preregistered a separate V2 phase breakdown and preserves these V1 bytes. CPU excludes file parsing, serialization, and calibration; this shared-host L0 run does not establish an isolated wall-performance result.