Run report: strong-rho implementation controls

Run start: 2026-10-14 01:13:10 UTC. Session: `ECBS1hffaa276d8a5c`; spec: `ECS1h87343a2f7167`; implementation commit: `2fd065a6c`; binary SHA-256: `8778c2a8…31b22` (full value in `../../BUILD.json`).


The command requested ECBench's automatic whole-core placement on the frozen three-arm spec. The initial preregistered command without `--allow-busy` refused because `/proc/pressure/cpu` and `/proc/pressure/memory` were absent. The retained fallback added `--allow-busy`; this is a disclosed protocol deviation and caps every wall sample below L2.

```
ecbench run --wait --allow-busy --spec spec.json \
  --out sessions/run-20261014T012000Z --cpus auto
```


Host class `ECBENV2h217559836c7c` is a five-core, no-SMT KVM guest reporting an AMD EPYC 9V74 and Linux 6.18.44. The three arms were the literal legacy path, the standing optimized path, and an identical optimized A/A control. Six registered Koblitz curves, eight public targets per curve, one warm-up and five measured rounds produced 864 records: 864 verified, no failures or timeouts.

Recorded observations

Quantity	Recorded value	Treatment
opt / legacy GAE	1.0000 [1.0000, 1.0000], 240 pairs	count
opt / legacy wall	0.9586 median, 240 L0 pairs	L0 only
opt / opt wall	0.9997 median, 240 L0 pairs	A/A L0
measured replay	720/720 identical	audit
opt / legacy Callgrind	0.802155	separate unit

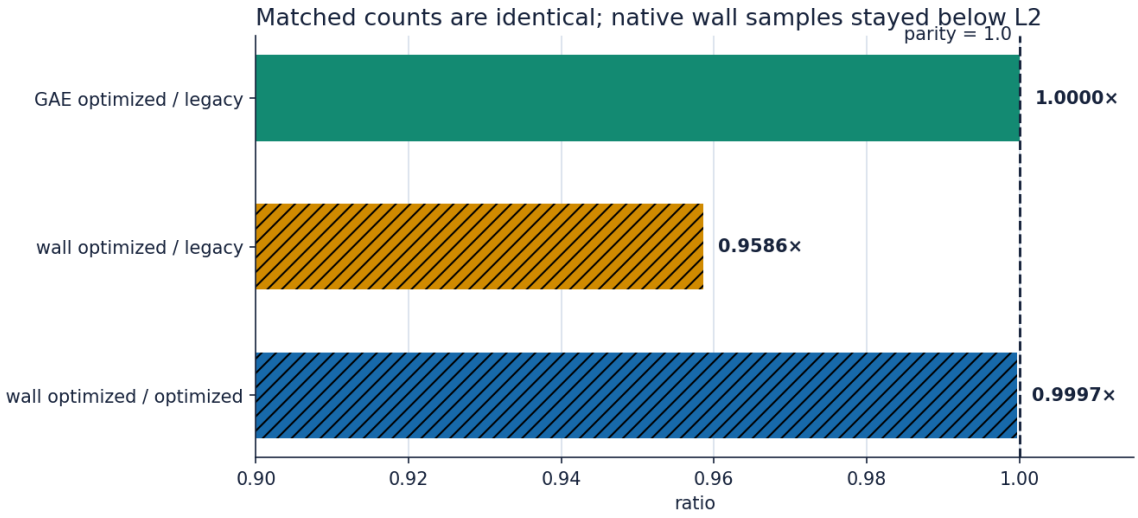

48 workloads × 5 measured rounds = 240 pairs · hatched wall rows are L0 descriptive, have no admitted interval, and are not performance claims · ECBS1hffaa276d8a5c

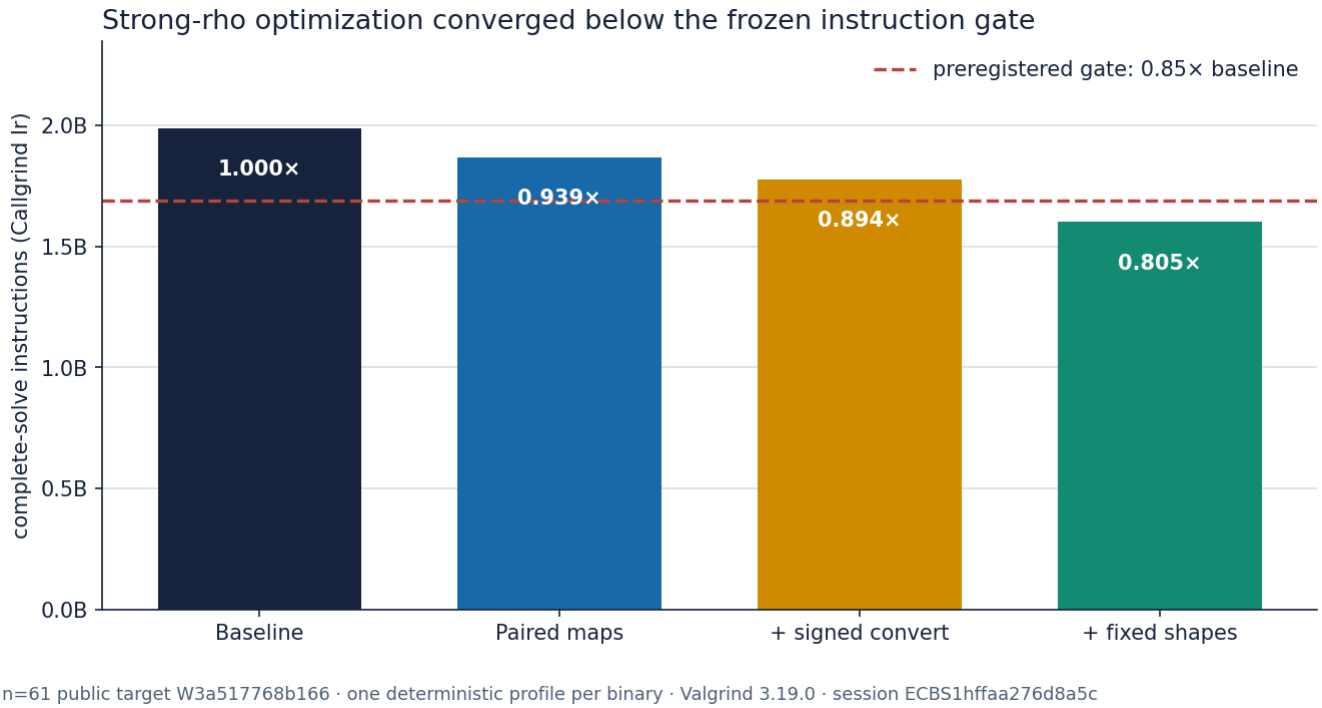

The Callgrind graph uses one deterministic complete-solve profile per binary on n=61 public workload `W3a517768b166`, Valgrind 3.19.0. It shows `callgrind.Ir`, not native wall time. The horizontal line is the preregistered 0.85 ratio threshold. The session-control graph hatches both wall rows to mark their L0 status and lack of an admitted confidence interval.

Raw session evidence is in `../../sessions/run-20261014T012000Z/`, raw instruction profiles in `../../callgrind/`, and graph values in `figure-data.json`. Interpretation and frontier treatment are in the result report.