


BLUEPRNT

High-Performance Desktop Media Ingestion, Verification & Delivery Suite

Official End-User Manual & Operational Reference Guide • Version 1.5.0 • Released September 2026
Proprietary Commercial Software engineered by VibePress Studio (Abu Saeed Mohammad Sayem, Schenectady, NY)

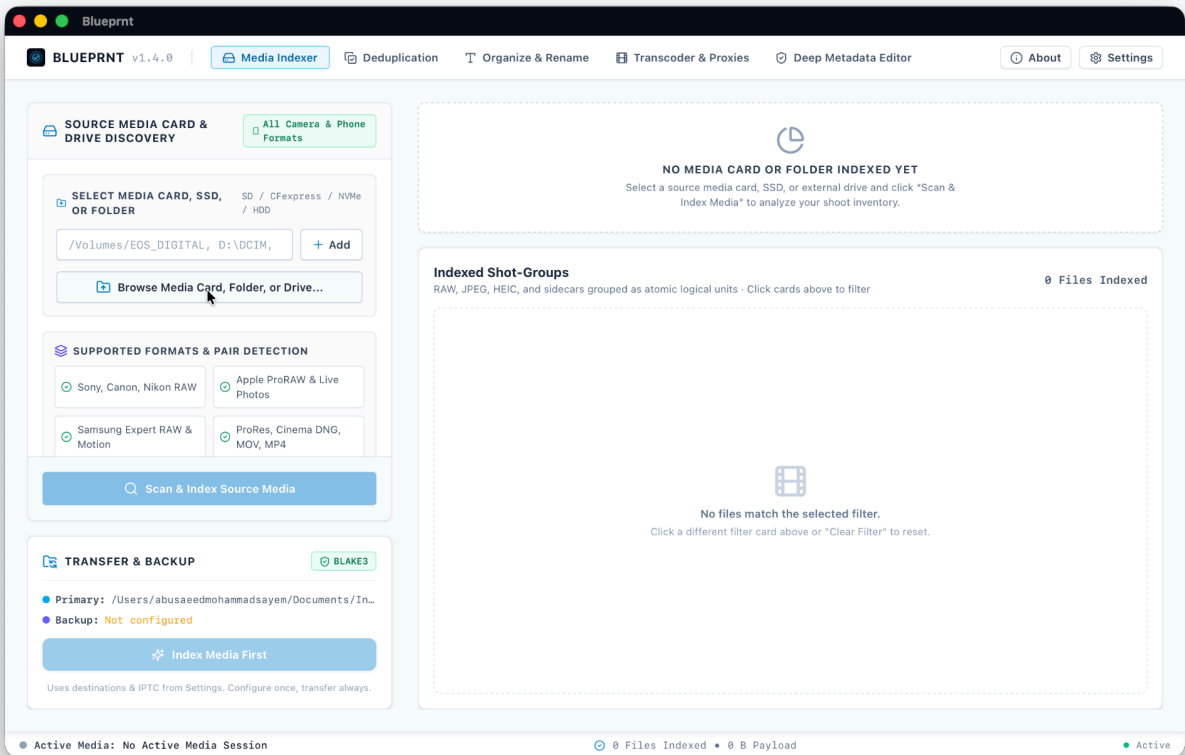

Caption: High-contrast view of Blueprnt v1.5.0 showing the top navigation bar, active project path, and status badges.

1. Executive Overview & Core Engine Architecture

Blueprnt is a local-first, zero-cloud desktop application engineered for high-throughput digital asset ingestion, verification, organization, proxy transcoding, and delivery. Built natively on Tauri v2, Rust (Edition 2021), SQLite (WAL Mode), and React 19 + TypeScript, Blueprnt empowers photographers, cinematographers, digital imaging technicians (DITs), and studio teams to process massive media shoots with zero data loss risk, sub-15ms embedded preview extraction, and hardware-accelerated cryptographic verification.

Core Architectural Invariants & Safety Principles:

- Universal Offline Format Handling:** Natively reads and processes Canon CR2/CR3, Nikon NEF, Sony ARW, Fujifilm RAF, Panasonic RW2, Leica DNG, Apple ProRAW (.DNG), High-Efficiency (.HEIC/.HEIF), standard JPEG, PNG, TIFF, Apple ProRes 422 (.MOV), H.264/H.265 (.MP4/.MOV), WAV voice memos, Apple AAE edit sidecars, and XMP metadata sidecars entirely on the local file system without third-party network APIs.

- **Instant Embedded Preview Extraction:** Bypasses full-frame RAW sensor array decoding by seeking directly to container binary offsets (TIFF IFD tags and ISOBMFF container boxes) to extract embedded 1080p JPEG preview streams in sub-15ms windows.
- **Indivisible Shot-Group Locking:** Automatically detects and clusters multi-format capture files sharing a stem—treating RAW, JPG, HEIC, MOV, WAV voice memos, and sidecar XMP files as an atomic logical group (logical_group_id). Renaming or modifying one asset automatically syncs all paired companion files without breaking Lightroom, Capture One, or Final Cut catalog paths.
- **High-Throughput Parallel Processing:** Built with pure Rust, utilizing multi-threaded directory walking via jwalk and data stream parallelism via rayon to effortlessly handle shoots spanning 10,000+ files without UI freezes.
- **Hardware-Accelerated Cryptographic Hashing:** Uses SIMD-accelerated BLAKE3 hashing for fast partial and full bitstream verifications, eliminating silent bit-rot during transfer pipelines.
- **Two-Stage Atomic File Replacement:** Writes scrubbed, transcoded, and renamed binaries to .tmp_blueprint intermediate paths before executing atomic filesystem swaps, protecting files against mid-flight power failures or system crashes.
- **Persistent SQLite WAL Undo Journal:** Logs every batch rename, quarantine, and scrub into a local SQLite database (blueprint_state.db) running in Write-Ahead Logging (WAL) mode, guaranteeing 1-click reversibility across application restarts.

2. Multi-Platform Installation Guide

Blueprint v1.5.0 is distributed as native standalone binaries for macOS, Windows, and Linux. No runtime dependencies (such as Node.js or Python) are required on the host system. Download the official installer corresponding to your operating system from the direct release matrix below:

Operating System	Architecture	Installer Package
macOS (12.0+)	Apple Silicon (M1/M2/M3/M4)	Blueprint_1.5.0_aarch64.dmg
Windows (10/11)	x86_64 (64-bit)	Blueprint_1.5.0_x64-setup.exe
Linux (Debian/Ubuntu)	amd64 (64-bit)	Blueprint_1.5.0_amd64.deb
Linux (Fedora/RHEL)	x86_64 (64-bit)	Blueprint-1.5.0-1.x86_64.rpm

2.1 macOS Installation (Apple Silicon & Intel)

Step 1: Download Blueprint_1.5.0_aarch64.dmg from the official release link above.


Step 2: Double-click the downloaded .dmg file in Finder to mount the disk image.

Step 3: Drag the Blueprint application icon into the macOS Applications shortcut folder.

Step 4: Launch Blueprint from Applications or Spotlight. On initial launch, macOS Gatekeeper may prompt verification. Click 'Open' to proceed.

Step 5: Security & Storage Permissions: To allow Blueprint to index external SD cards and SSDs, open macOS System Settings -> Privacy & Security -> Files and Folders, and ensure Blueprint has permission for 'Removable Volumes' and 'Network Volumes' (or grant 'Full Disk Access').

Step 6: Operating System Dock Tooltip: When hovering over the Blueprint icon in the macOS Dock, the application name will display in proper title casing as 'Blueprint'.

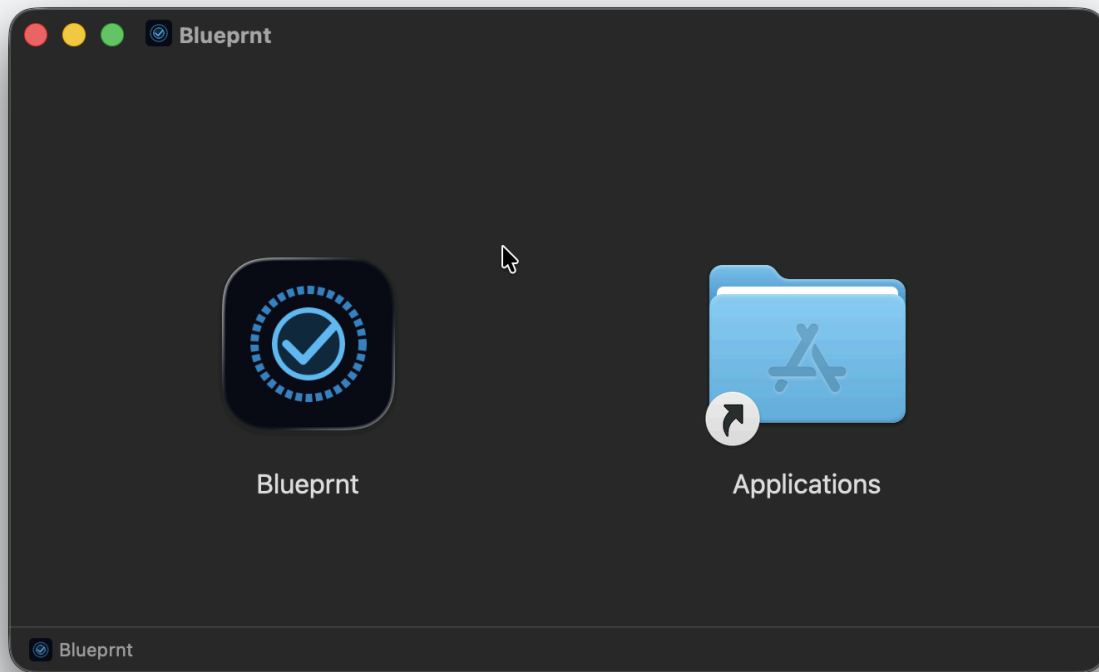

Caption: Finder window showing Blueprnt.app dragged to Applications folder and macOS Privacy & Security dialog.

2.2 Windows Installation (Windows 10 / Windows 11)

Step 1: Download Blueprnt_1.5.0_x64-setup.exe from the official release link.

Step 2: Double-click the executable to launch the NSIS Setup Wizard. If Microsoft Defender SmartScreen presents a prompt, click 'More info' and then select 'Run anyway'.

Step 3: Select the destination directory (default is %LocalAppData%\Programs\Blueprnt) and choose whether to create a Desktop shortcut.

Step 4: Click 'Install' and allow the wizard to complete file extraction.

Step 5: Click 'Finish' to launch Blueprnt. Windows Taskbar and system tray tooltips will display as 'Blueprnt'.

2.3 Linux Installation (Debian / Ubuntu / Fedora / RHEL)

For Debian, Ubuntu, and Linux Mint:

Open terminal and execute:

```
sudo dpkg -i Blueprnt_1.5.0_amd64.deb  
sudo apt-get install -f -y
```

For Fedora, Red Hat Enterprise Linux, and openSUSE:

Open terminal and execute:

```
sudo dnf install ./Blueprnt-1.5.0-1.x86_64.rpm
```

[NOTE] Linux System Dependencies

Blueprint requires libwebkit2gtk-4.1-0 and libayatana-appindicator3-1 on Linux desktop environments. The package manager commands above automatically resolve these prerequisites.

3. Step-by-Step Feature Instructions

3.1 Media Indexer Tab & Real-Time Infographics Dashboard

The Media Indexer serves as the primary gateway for all digital asset discovery. Utilizing multi-threaded directory walking, it indexes large cinema media cards and drive mounts in milliseconds, populating a rich telemetry suite.

Step 1: Mount your SD card, CFexpress card, RED Mini-Mag, or external NVMe drive to your workstation.

Step 2: Navigate to the 'Media Indexer' tab on the top navigation bar.

Step 3: Click the large 'Select Media Source Folder' button. A native system folder picker will appear.

Step 4: Select the root directory or DCIM folder of your source media and confirm.


Step 5: Instant Scanning: The Rust engine scans all files in parallel, creating logical shot pairings and extracting embedded 1080p preview streams.

Step 6: Inspect the Real-Time Media Analytics Dashboard Cards:

- Total Assets: Total count of discovered media files.
- Stills & Photos: Total JPEG, PNG, TIFF, and standard photo files.
- RAW Negatives: Total camera RAW files (CR2/CR3/NEF/ARW/RAF/DNG).
- Live & Motion Photos: Paired Apple Live Photos and Android Motion Photos.
- Cinema Videos: Apple ProRes MOV, MP4, H.264/H.265 video files.
- Storage Payload Volume: Total storage footprint formatted cleanly in MB, GB, or TB.

Step 7: Radial SVG Sunburst Storage Visualizer: Click and hover over sectors in the interactive radial sunburst chart to explore proportional disk consumption categorized by media types and file extensions.

Step 8: Filter and Search: Use the search bar to locate specific filenames, camera models, or lens types instantly.

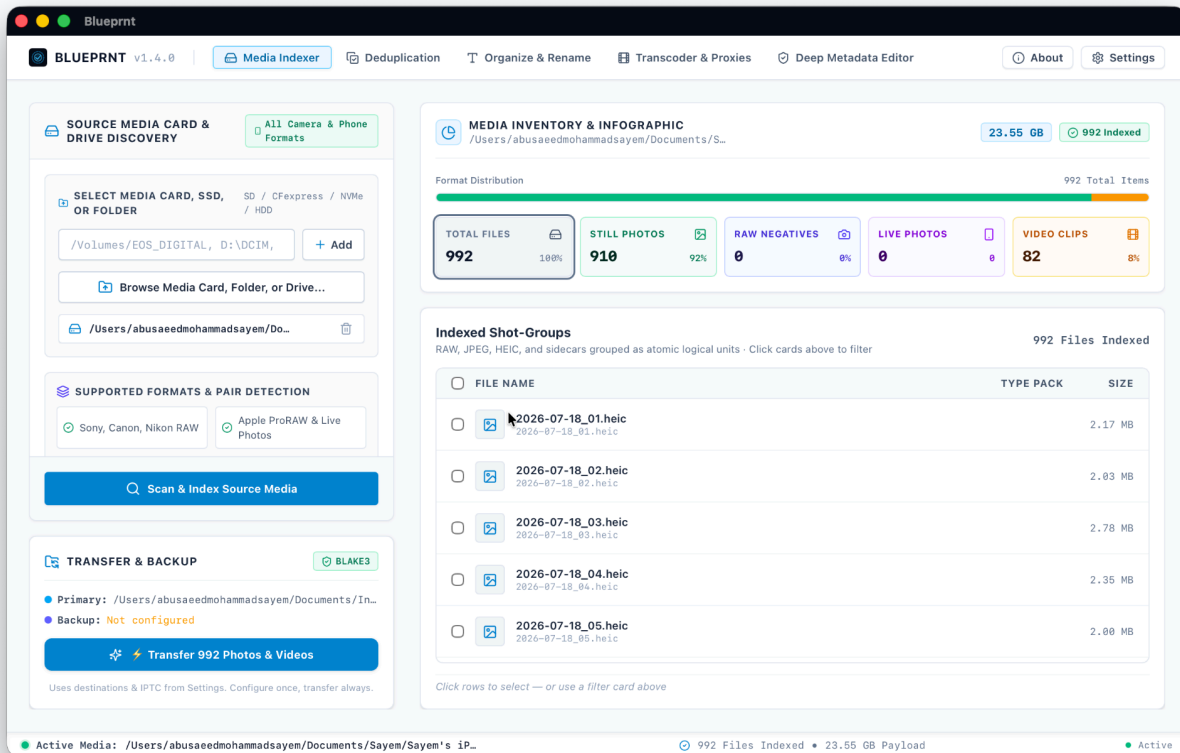

Caption: Media Indexer view showing the 6 metric analytic cards, Radial SVG Sunburst map, and indexed file asset grid.

3.2 Persistent System Settings & Studio Defaults (Settings Window)

The Settings Window configures global studio policies, automated 3-2-1 backup ingest routing, cryptographic verification rules, and default IPTC metadata templates that persist across all projects in the local SQLite database.

Step 1: Open Settings: Click the Gear icon located in the upper right header of the application window.

Step 2: Configure Storage Ingest Destinations (3-2-1 Backup Strategy):

- Primary Destination (Editing Work Drive): Set your high-speed internal NVMe SSD path where active editing assets will reside.
- Secondary Destination (3-2-1 Mirror Backup): Set an on-site secondary RAID array or external backup drive for simultaneous dual-write mirroring.
- Cloud Staging Directory: Set a local sync folder (e.g. Dropbox, Google Drive, Synology Drive) for automated off-site cloud replication.

Step 3: Toggle BLAKE3 Bit-by-Bit Verification: Enable the 'Cryptographic BLAKE3 Verification' toggle to enforce bit-level checksum checks after every file transfer, ensuring 100% data integrity with zero bit-rot.

Step 4: Configure Studio IPTC Metadata Defaults:

- Creator / Photographer Name: e.g. 'Jane Doe'
- Copyright Notice: e.g. '© 2026 VibePress Studio. All Rights Reserved.'
- Credit Line: e.g. 'VibePress Commercial Photography'
- Default Keywords: e.g. 'Commercial, 4K, Studio, Editorial'
- Studio Website URL: e.g. 'https://vibepress.studio'

Step 5: Click 'Save Settings'. All configurations are atomically written to SQLite and immediately apply to all future ingestion operations.

Blueprint System Settings & Defaults

Configure your studio workflow defaults once to streamline all future ingest sessions

Transfer, Storage & Metadata

Renaming & Tokens

Video Transcoder

Engine & Performance

Default Primary Editing Destination

/Users/abuseedmohammadsayem/Documents/Ingested

Browse...

Default Secondary 3-2-1 Backup Drive

/Volumes/VaultBackup/Archive

Browse...

Default Cloud Storage Sync Folder

/Users/name/Dropbox/CloudIngest

Browse...

Bit-by-Bit BLAKE3 Checksum Verification

Enable 3-2-1 Dual-Drive Mirroring by Default

Enable Cloud Storage Replication by Default

IPTC ATTRIBUTION & COPYRIGHT

Default Creator / Photographer

Studio Lead

Default Copyright Notice

© 2026 All Rights Reserved

Default Credit Line / Agency

Studio Production

Default Contact Website URL

https://studio.blueprnt.io

Reset to Defaults

Cancel

Save & Apply Settings

Caption: Settings modal showing Primary, Secondary, and Cloud path selectors, BLAKE3 toggle, and IPTC studio textboxes.

3.3 Token Pattern Builder & CSV Client Roster Engine (Settings Window & Renamer)

Blueprint features an advanced token pattern engine that constructs dynamic, collision-free naming conventions from EXIF metadata, timestamps, camera models, sequence counters, custom text, and client rosters.

Token Tag	Description & Syntax Example	Resolved Output Example
{CustomText}	Custom user-defined text string from settings or renamer input	VibePress_Master / ClientName

{Date:YYYY-MM-DD}	Capture date formatted as Year-Month-Day	2026-09-20
{Date:YYYYMMDD}	Compact capture date without hyphens	20260920
{Time:HHmmss}	Capture time formatted as Hours-Minutes-Seconds	143502
{Model}	Camera body hardware model from EXIF	Canon_EOS_R5 / Sony_A7R5
{Lens}	Lens optical specification from EXIF	24-70mm_F2.8
{ISO}	Sensor sensitivity rating from EXIF	ISO400
{Sequence:03}	Zero-padded 3-digit numerical sequence	001, 002, 003...
{Sequence:04}	Zero-padded 4-digit numerical sequence	0001, 0002, 0003...
{Original}	Original source filename stem prior to renaming	IMG_9482
{RosterName}	Client name mapped from uploaded CSV roster range	Sarah_Jenkins / Unit_104

Step-by-Step CustomText Token Configuration:

1. In Settings or the Organize & Rename tab, locate the 'CustomText Value' input box.
2. Type your desired custom identifier (e.g. 'SmithWedding_Day1' or 'Architectural_Master').
3. Click the '{CustomText}' quick token chip to append it to your active naming pattern.
4. The token engine immediately updates the live renaming projection table in real time.

Step-by-Step CSV Client Roster Mapping Workflow:

1. For school portraits, sports events, or real estate shoots, prepare a standard CSV file with headers: SequenceStart, SequenceEnd, ClientName (e.g. 1, 25, 'Smith_Family'; 26, 60, 'Johnson_Family').
2. In the Token Builder, click 'Upload Client Roster (CSV)'.
3. Select your .csv file. The engine validates sequence boundaries and maps {RosterName} tokens dynamically to matching shot indices.
4. Inspect the preview table to verify that every client name aligns perfectly with their capture sequence.

Blueprint System Settings & Defaults
×

Configure your studio workflow defaults once to streamline all future ingest sessions

Transfer, Storage & Metadata

Renaming & Tokens

Video Transcoder

Engine & Performance

Default Renaming Pattern
Tokens: {Date}, {CustomText}, {Sequence:03}

Available tokens: {Date}, {CustomText}, {Model}, {Lens}, {ISO}, {Sequence:03}, {Original}

CustomText (Included with Naming System)
TOKEN: {CUSTOMTEXT}

Whatever text you write in this box will be automatically injected into your current naming system without any collisions.

Sequence Padding Length

Space Replacement Character

TOKEN PATTERN BUILDER

Workflow Presets

Wedding Delivery

{Date:YYYY-MM-DD}_{Model}_WDD-{Sequence:03}

Real Estate MLS

MLS_{Date:YYYYMMDD}_{Model}_{Sequence:04}

Gear & Date

{Model}_{Lens}_{Date:YYYY-MM-DD}_{Sequence:03}

Original Stem + Date

{Original}_{Date:YYYY-MM-DD}

Template String

Delimiters: _, -, space, or text

Reset to Defaults

Cancel

Save & Apply Settings

Caption: Token builder showing quick-add token chips, CustomText input field, and CSV Client Roster upload panel.

3.4 Organize & Rename Tab


The Organize & Rename workspace provides a live, non-destructive renaming projection grid with built-in pre-flight collision detection, atomic two-stage execution, and instant SQLite journal rollback.

Step 1: Navigate to the 'Organize & Rename' tab.

Step 2: Inspect the Live 'Renaming Projection' Grid:

- Original Name & Path: Shows current physical filename and subfolder location.
- Target Naming Projection: Displays the real-time evaluated filename based on your active token pattern.
- Status Column: Displays an emerald 'READY' badge for conflict-free assets, or a vibrant rose 'COLLISION' badge if a name conflict is detected.

- Step 3:** Proactive Pre-Flight Collision Prevention: If two files project to the same target name or if a target file already exists on physical storage, Blueprint highlights the collision and disables the execution button, preventing accidental data overwrites.
- Step 4:** Select Assets to Rename: Check individual checkboxes to rename specific assets, or check the header checkbox to select all filtered items.
- Step 5:** Execute Atomic Rename: Click 'Execute Bulk Rename'. Blueprint performs a safe Two-Stage Temporary Move (.tmp_blueprint intermediate paths) to guarantee that circular naming swaps execute cleanly without collisions.
- Step 6:** Atomic Shot-Pair Preservation: Paired RAW + JPG + HEIC + MOV + XMP sidecars share the identical logical_group_id and are renamed synchronously, preserving Lightroom and Capture One catalog paths.
- Step 7:** Delete Unneeded Files to OS Trash: Select unwanted files and click 'Delete Selected → Trash'. Files are safely moved to the operating system's Trash, and SQLite records are synchronously purged.
- Step 8:** Persistent Undo Journal (1-Click Rollback): Click the History icon to open the Undo History Modal. View past executed batches with timestamps and click 'Undo Batch' to revert filenames instantly.

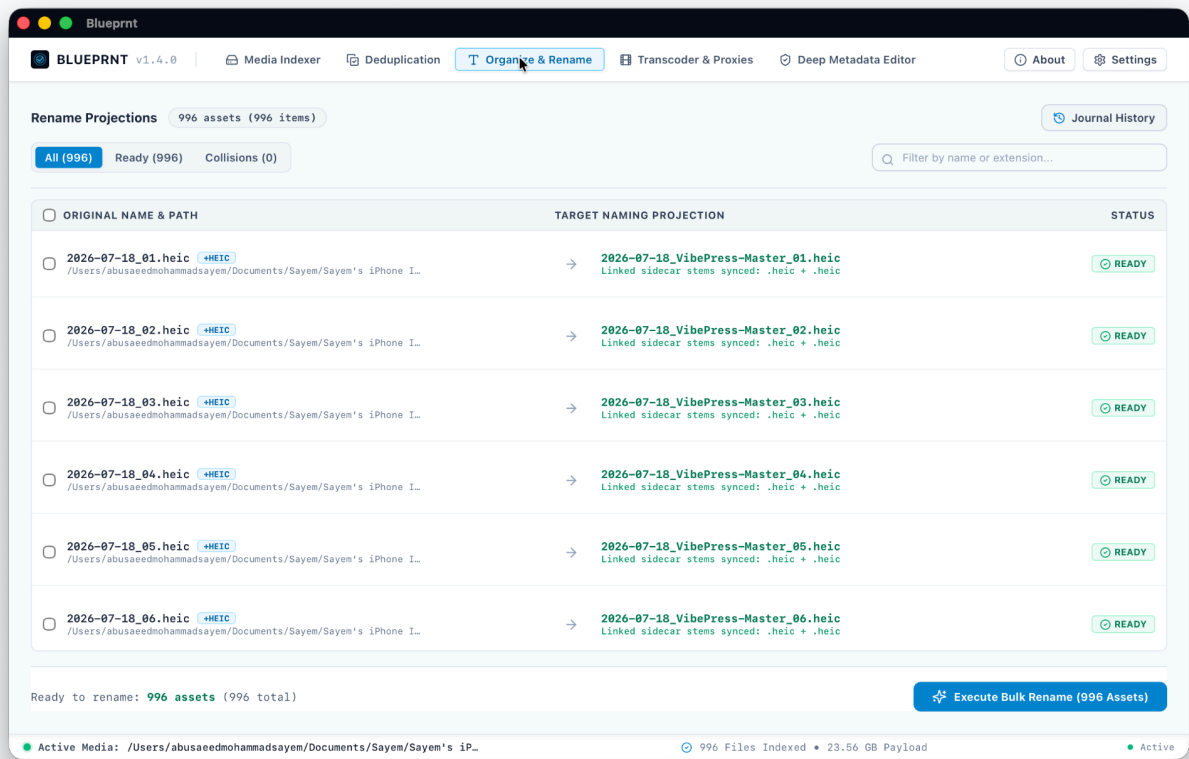

Caption: Renaming projection table with original vs target names, collision warning banner, and execution buttons.

3.5 Video Transcoder & Editing Proxies (Settings Window)

Configure default video transcoding profiles and hardware acceleration options in the Settings Window to ensure seamless NLE proxy generation for Premiere Pro, DaVinci Resolve, and Final Cut Pro.

Codec Profile	Target Bitrate / CRF	Recommended NLE Workflow	Characteristics
Apple ProRes 422 (Proxy)	Automatic (~45 Mbps at 1080p)	Final Cut Pro / Premiere / Resolve	Ultra-fast timeline scrubbing, minimal CPU/GPU overhead
Apple ProRes 422 (LT)	Automatic (~100 Mbps at 1080p)	Commercial Dailies & Review	Balanced visual fidelity for client review cuts
Apple ProRes 422 (HQ)	Automatic (~220 Mbps at 1080p)	Master Delivery & VFX	Highest quality 10-bit color proxy mastering
Avid DNxHR (LB)	Low Bandwidth Profile	Avid Media Composer / DaVinci Resolve	Standard offline editing proxy for broadcast pipelines
Avid DNxHR (SQ)	Standard Quality Profile	Broadcast Delivery & Multi-Cam	High-efficiency 8-bit standard editing codec
H.264 (AVC / MP4)	CRF 22 / Hardware NVENC/VT	Web Delivery & Client Mobile Review	Universal compatibility across mobile and web players
H.265 (HEVC / MP4)	CRF 26 / 10-bit HDR	Archival & Low-Storage Storage Pools	Maximum compression efficiency with minimal file size

[PRO-TIP] Audio Downmixing & Resolution Scaling

In Settings, set Resolution Scale to '50% (Half-Res)' or '1080p' for optimal editing performance on laptop workstations. Ensure 'Stereo Downmix (2.0 Channel)' is checked if shooting with 4-channel cinema audio.

3.6 Transcoder & Proxies Tab

The Transcoder & Proxies tab is a dedicated batch video transcoding studio that transforms heavy camera RAW footage (RED, ARRI, Sony XAVC, Canon Cinema RAW Lite, Apple ProRes 4K/8K) into lightweight editing proxies in the background.

Step 1: Navigate to the 'Transcoder & Proxies' tab.

Step 2: Review the automatically populated video queue containing all indexed cinema and drone video clips.

Step 3: Select your target proxy profile (e.g. 'ProRes 422 Proxy - 1080p' or 'H.264 Web Proxy').


Step 4: Set proxy output destination (default creates an organized /Proxies subfolder alongside primary media).

Step 5: Click 'Start Batch Transcoding'.

Step 6: Monitor Real-Time Processing Telemetry:

- Individual Clip Progress Bar (0% to 100%).
- Processing Speed (e.g. 145 fps / 6.0x realtime).
- Elapsed Time and Estimated Time Remaining (ETA).
- Current encoding resolution and audio downmix status.

Step 7: Upon completion, proxy filenames match the original source stems exactly, enabling seamless 1-click proxy attachment inside DaVinci Resolve, Adobe Premiere Pro, and Apple Final Cut Pro.

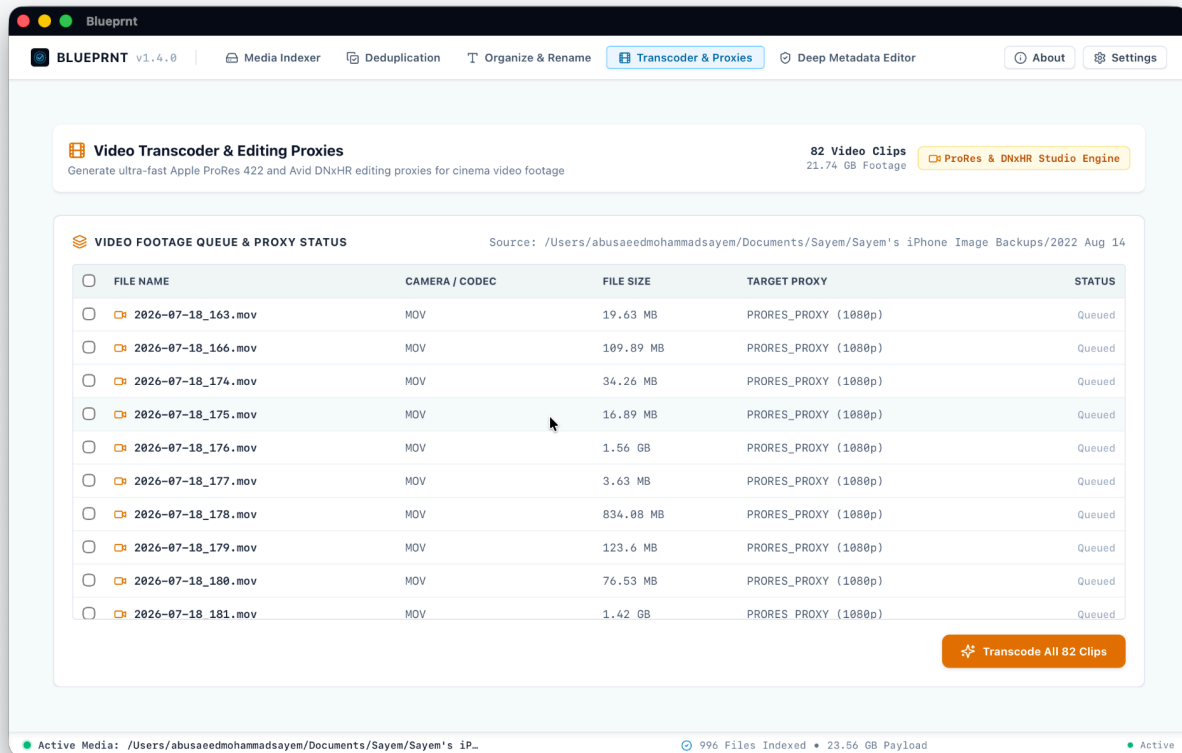

Caption: Video batch queue with active transcoding progress bars, fps rendering telemetry, and codec selectors.

3.7 Duplication Tab with Delete Confirmation Window

The Deduplication workspace combines cryptographic BLAKE3 byte-by-byte duplicate discovery with temporal burst clustering to identify redundant takes, burst sequences, and duplicate files across multiple storage media.

Step 1: Navigate to the 'Deduplication' tab.

Step 2: Choose your analysis mode:


- Exact BLAKE3 Duplicate Finder: Compares cryptographic checksums to find 100% byte-for-byte identical files across cards and folders.
- Temporal Burst Clustering: Groups high-speed burst shots sharing the same camera model captured within a configurable time delta (0.5s to 5.0s).

Step 3: Smart-Keep Heuristics: Blueprnt automatically evaluates burst clusters and flags the highest-resolution frame or largest file size as the recommended 'Keeper' (green badge), while staging redundant shots for quarantine or deletion.


Step 4: Non-Destructive Quarantine Vault: Click 'Move to Quarantine Vault' to safely move redundant files into an isolated _Quarantine directory while strictly preserving the original nested subfolder tree.

Step 5: Safe Deletion with Confirmation Window: Click 'Delete Selected Duplicates'.

- The Delete Confirmation Dialog appears displaying the exact count of selected files and the total storage volume to be reclaimed.
- Confirming deletion moves the files to the operating system's native Trash (zero hard erasure risk) and purges SQLite records synchronously.

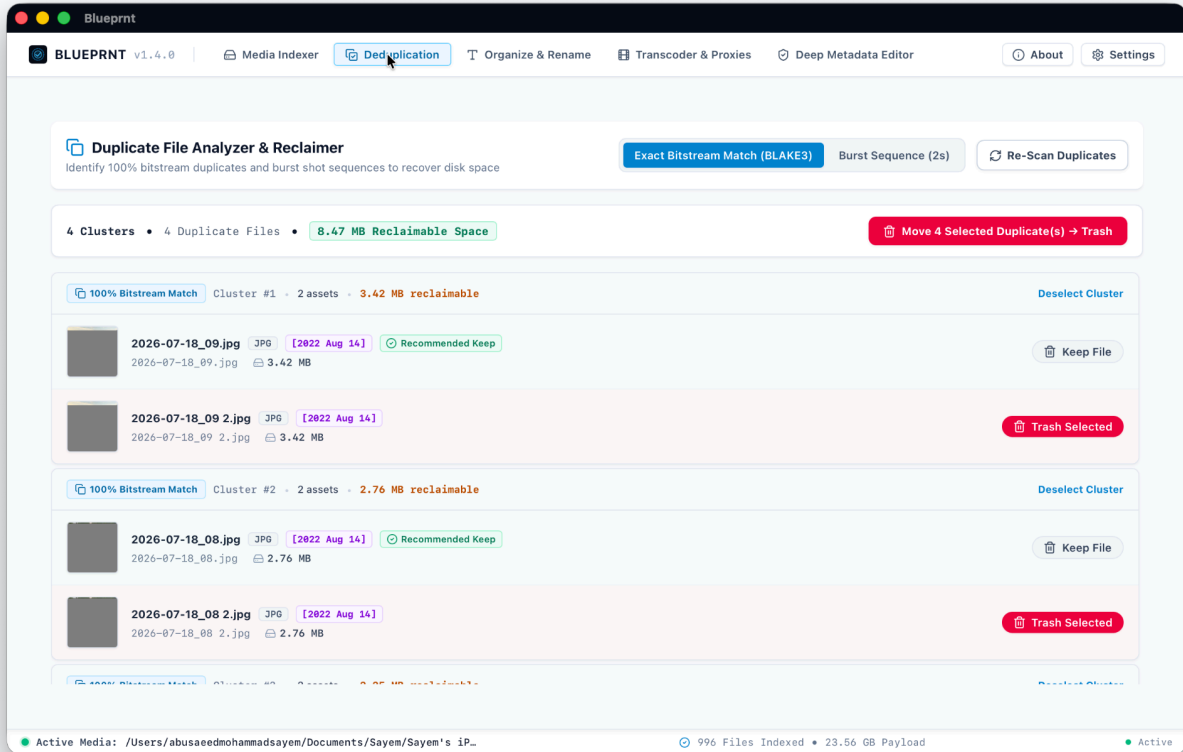

Duplication Tab

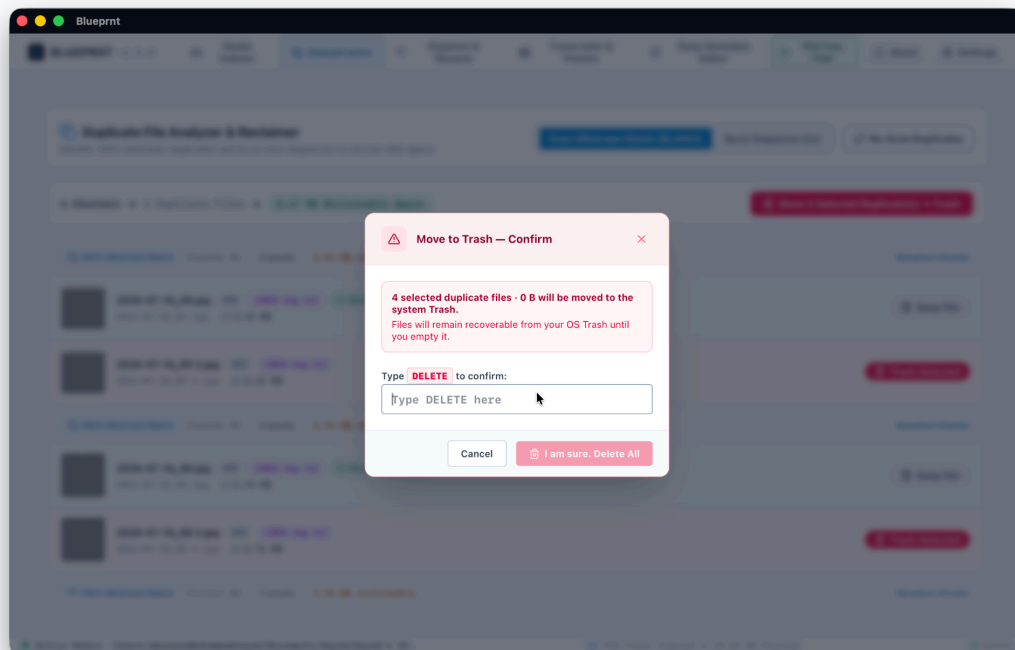

Caption: Duplicate cluster comparison view with Smart-Keep green badge and the Delete Confirmation Modal.

3.8 Deep Metadata Editor Tab

The Deep Metadata Editor is a dedicated full-featured workspace for direct, in-place EXIF, IPTC, and XMP metadata manipulation, original capture date/time modification, and complete privacy sanitization.

Step 1: Navigate to the 'Deep Metadata Editor' tab.

Step 2: Select a media file or multiple files from the left asset list.

Step 3: Modify Original Content Creation Date & Time:

- In the 'Content Creation Date' section, use the interactive date and time pickers to adjust DateTimeOriginal and CreateDate timestamps.
- Perfect for synchronizing camera bodies whose internal clocks drifted during multi-camera shoots.


Step 4: One-Click Complete GPS Purge:

- Click the vibrant red 'Purge All GPS & Location Data' button.
- The engine instantly removes Latitude, Longitude, Altitude, GPS Satellites, and location timestamps from EXIF and XMP sidecars.
- Green verification badges confirm that zero location trace remains.

Step 5: Edit Studio IPTC & XMP Metadata Fields In-Place:

- Artist / Photographer Name
- Copyright Notice & License Terms
- Credit Line & Digital Source Type
- Document Title & Description / Caption
- Camera Body & Optical Lens Model Strings

Step 6: Click 'Save & Update Metadata In-Place'. Changes are written cleanly to file headers using atomic two-stage binary replacement, updating the UI immediately.

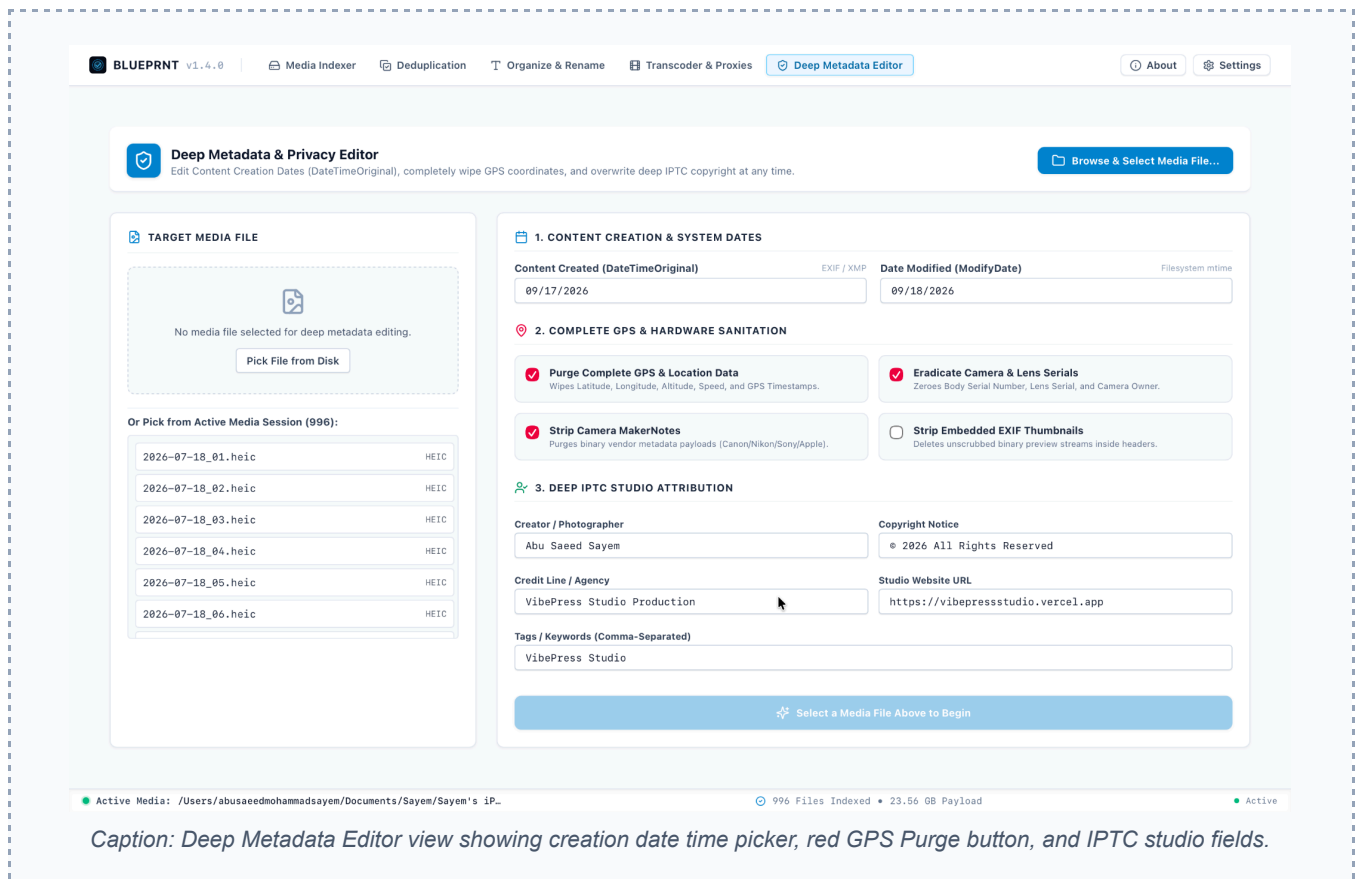

3.9 About Window

The About Window provides unified version verification, core system specifications, legal copyright notices, and direct links to official documentation and support channels.


Step 1: Access the About Window: Click the 'About' link or 'Blueprint v1.5.0' badge in the top navigation header.

Step 2: Dynamic Synchronized Version Verification: The window dynamically displays the active version '1.5.0' synchronized with native Tauri APIs and the application topbar.

Step 3: Technical Runtime Specifications: Displays the underlying engine architecture (Rust Edition 2021, Tauri v2, SQLite WAL Mode, React 19).

Step 4: Legal & Intellectual Property Notice: Displays the VibePress Studio Commercial EULA notice and confirms proprietary rights (Abu Saeed Mohammad Sayem, Schenectady, NY).

Step 5: Official Links: Access official documentation, release changelogs, and customer support with a single click.

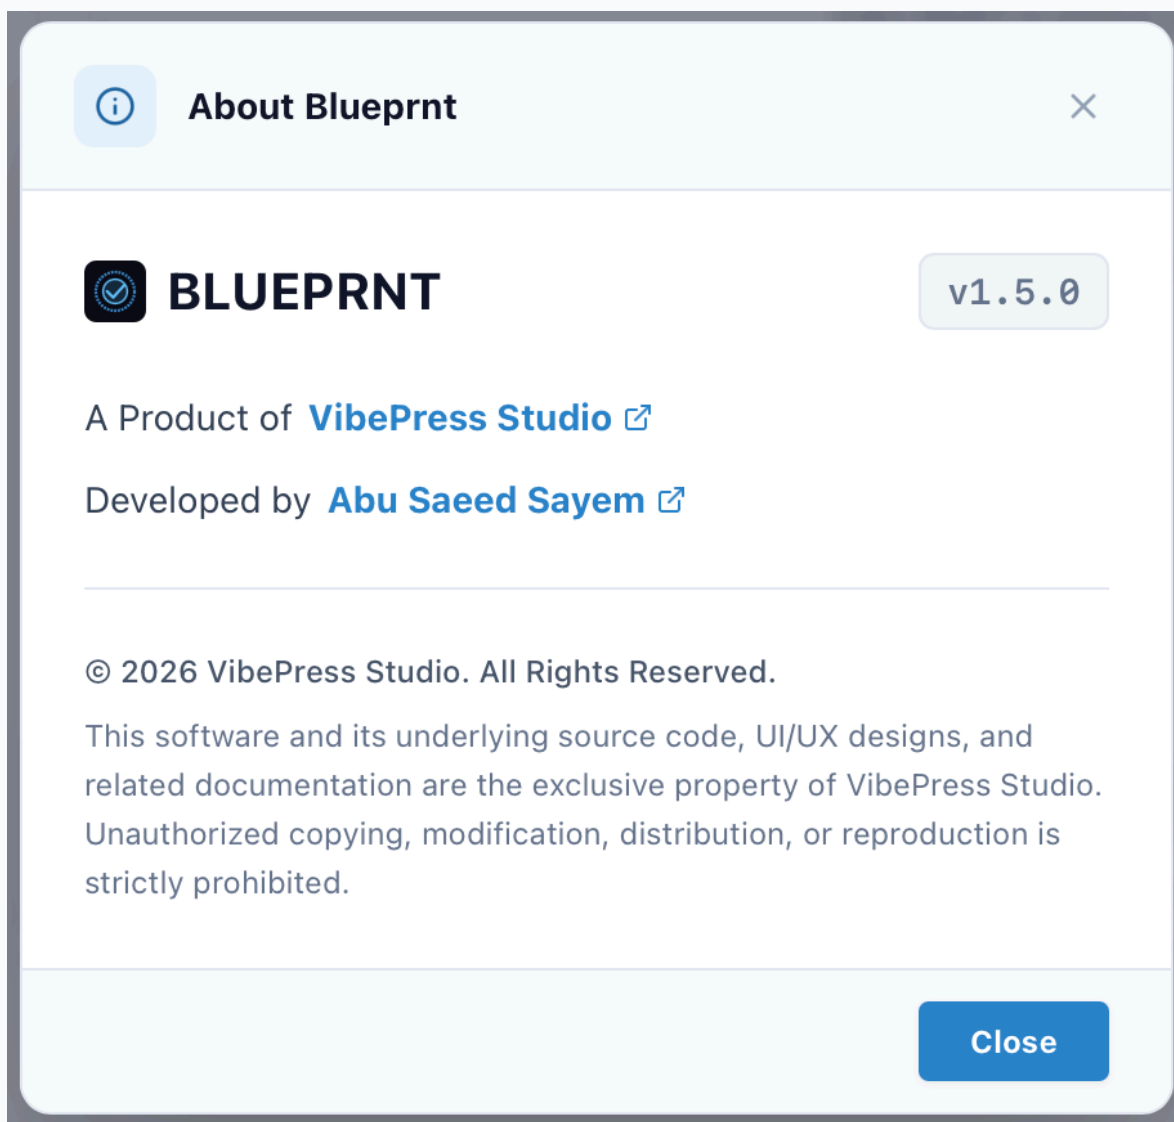

Caption: About modal showing Blueprint v1.5.0 badge, VibePress Studio copyright attribution, and tech stack specs.

3.10 Licensing Window & Commercial Tier Management

Blueprint v1.5.0 implements an automatic 15-day evaluation trial system alongside commercial Lemon Squeezy license activation with offline Ed25519 cryptographic validation and a 3-Year Free Update Guarantee.

Step 1: 15-Day Free Evaluation Trial (Automatic Clock):

- Non-paid users automatically receive a 15-day evaluation period starting from the exact moment of initial application launch.
- The topbar displays a live countdown badge: 'Free Evaluation (X Days Left)'.
- Free users enjoy full, unrestricted access to all features during the 15-day trial.

Step 2: Post-Trial Feature Lockouts (Day 16+):

- After the 15th day, non-paid evaluation access expires.
- Organize & Rename, Video Transcoding, and Deep Metadata Editing features are automatically locked, displaying clear upgrade banners.
- Media Indexing and basic preview extraction remain accessible.

Step 3: Activating a Paid Commercial License Key (Lemon Squeezy):


- Purchase a license key from the official Lemon Squeezy store.
- Click the 'License' badge in the top navigation bar to open the Licensing Window.
- Enter your Lemon Squeezy license key into the key field and click 'Activate License'.
- The application validates the key via Lemon Squeezy API v1 and stores an Ed25519 cryptographic token in your OS Keyring (blueprnt_app keychain) and SQLite state database.

Step 4: 3-Year Free Update Guarantee:

- Upon paid key activation, Blueprint calculates your 3-Year Free Update Guarantee window (valid for 3 full years from key activation date).
- The modal displays: '3-Year Free Updates: Valid until [Date]'.

Step 5: Deactivating a License for Hardware Migration:

- To move your license to a new workstation, open the Licensing Window and click 'Deactivate License'.
- Blueprint purges the local keychain record and releases the device activation on Lemon Squeezy.

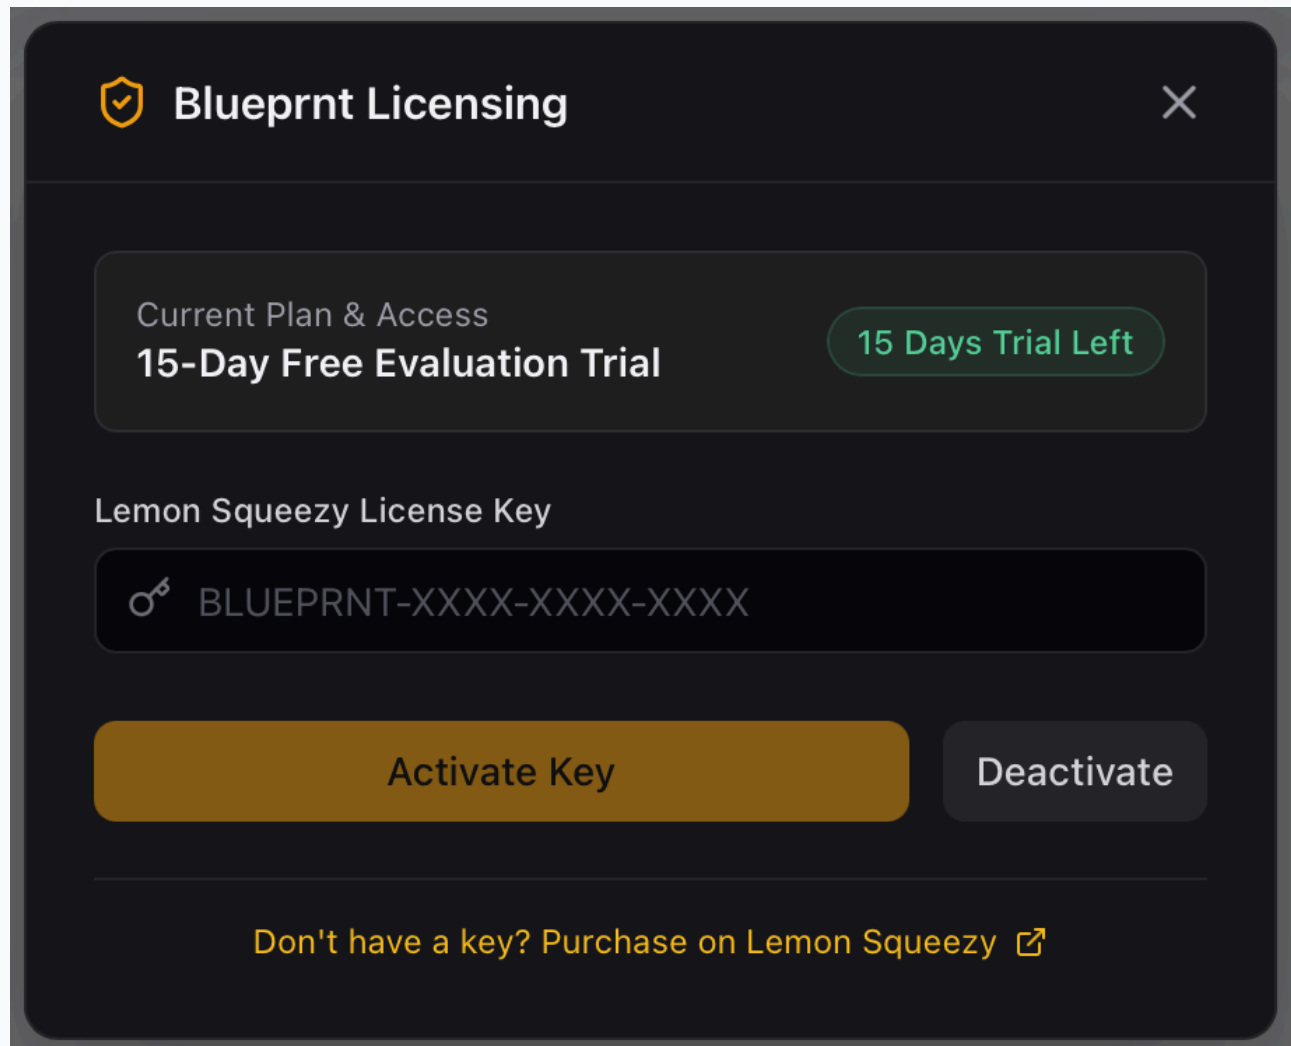

Caption: Licensing modal displaying active trial days remaining, Lemon Squeezy key input, and 3-Year Free Updates badge.

4. Operational Best Practices, Disaster Recovery & FAQ

Q: How does Blueprnt ensure that renaming a RAW file does not break my Lightroom or Capture One catalog?

A: Blueprnt enforces Indivisible Shot-Group Locking (logical_group_id). When you rename or move a RAW file (e.g. IMG_9482.CR3), the engine atomically mutates all associated companion files (IMG_9482.JPG, IMG_9482.XMP, IMG_9482.MOV, IMG_9482.WAV) using identical naming stems in the same transaction. This preserves sidecar associations and catalog integrity perfectly.

Q: What happens if my computer loses power during a 500-file batch rename or metadata update?

A: Blueprnt uses a Two-Stage Temporary File Replacement architecture. Files are initially written to intermediate paths (.tmp_blueprnt) and validated before executing atomic OS-level filesystem renames. Furthermore, every batch is recorded in the SQLite WAL Undo Journal (blueprnt_state.db), allowing you to reopen Blueprnt and immediately view or reverse the operation with 1 click.

Q: What hardware setup provides the fastest ingestion speeds?

A: For maximum throughput, ingest media directly from high-speed UHS-II / CFexpress Type B USB 3.2 Gen 2 or

Thunderbolt card readers directly to an internal PCIe Gen 4/5 NVMe SSD. Blueprint's multi-threaded Rust pipeline will saturate hardware bus speeds effortlessly.

Q: Does Blueprint transmit any of my images, EXIF data, or license details to the cloud?

A: No. Blueprint is strictly 100% local-first. All preview extraction, BLAKE3 checksum calculations, proxy transcoding, and database operations execute purely on your local CPU/GPU hardware. License verification uses secure offline Ed25519 cryptographic tokens stored in your native OS Keyring.