



Python: Functions and Files **Day 3**

FinTech
Lesson 2.3



Class Objectives

By the end of this class, you will be able to:

01

Define time value of money and explain how it's used.

02

Perform basic financial analysis from user-defined financial functions (NPV).

03

Import standard and custom Python libraries.

04


Read and write text files.

05

Identify tabular data and its form.

06

Read and write CSV files.

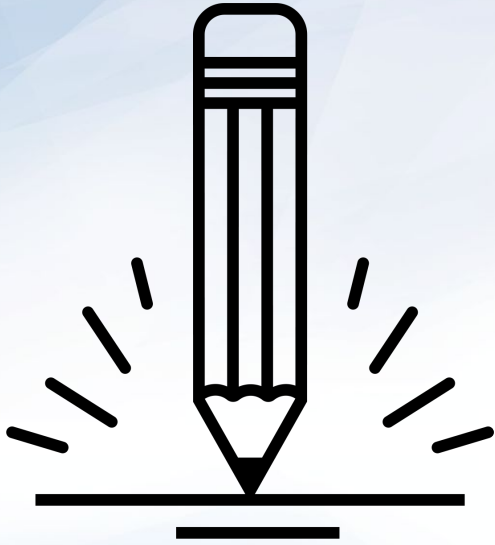

Activity: Refresher

In this activity, you will apply skills learned in the previous lessons to a financial use case. You will act as an analyst to categorize customers based on revenue and assign each customer a business tier: platinum, gold, silver, or bronze.

(Instructions sent via Slack)

Suggested Time:
15 Minutes





Time's Up! Let's Review.

Time Value of Money



Would you rather have \$50 today
or in two weeks? **Why?**


Money today is worth more than money tomorrow, due to the fact that money today can be invested and grown.



Time Value of Money

What does “time value of money” mean?

FV (future value of money)



FV=

PVx

$[1 + (i/n)]^{(nxt)}$

Time Value of Money

What does “time value of money” mean?

PV (present value of money)



FV=

PV_x

$[1 + (i/n)]^{(nxt)}$

Time Value of Money

What does “time value of money” mean?

n (number of compounding periods per year)

$FV =$	$PV \times$	$[1 + (i/n)]^{(n \times t)}$
--------	-------------	------------------------------



Time Value of Money

What does “time value of money” mean?

t (number of years)



FV=

PVx


$[1 + (i/n)]^{(n \times t)}$

Time Value of Money


How does it apply?

Assume a sum of \$10,000 is invested for one year at 10% interest.
The future value of that money is:


$$FV = \$10,000 \times [1 + (10\% / 1)^1] = \$11,000$$



Present value
of money



Number of
compounding
periods per year



Number of
years

Time Value of Money

How does it apply?

Now let's compare the differences in compounding periods for FV (future value):

Yearly Compounding	$FV = \$10,000 \times [1 + (10\% / 1)^{(1 \times 1)}] = \$11,000$
Quarterly Compounding	$FV = \$10,000 \times [1 + (10\% / 4)^{(4 \times 1)}] = \$11,038$
Monthly Compounding	$FV = \$10,000 \times [1 + (10\% / 12)^{(12 \times 1)}] = \$11,047$
Daily Compounding	$FV = \$10,000 \times [1 + (10\% / 365)^{(365 \times 1)}] = \$11,052$

Time Value of Money: Other Considerations

Ponder This Statement

Manipulating the future value formula allows us to calculate the present value, with all else given.



Time Value of Money: Other Considerations

Which option would you choose?

Receive
\$14,000.00
today


Receive
\$15,000.00
in 1 year

Time Value of Money: Other Considerations

Which option would you choose?

Receive
\$14,000.00
today

Receive
\$15,000.00
in 1 year

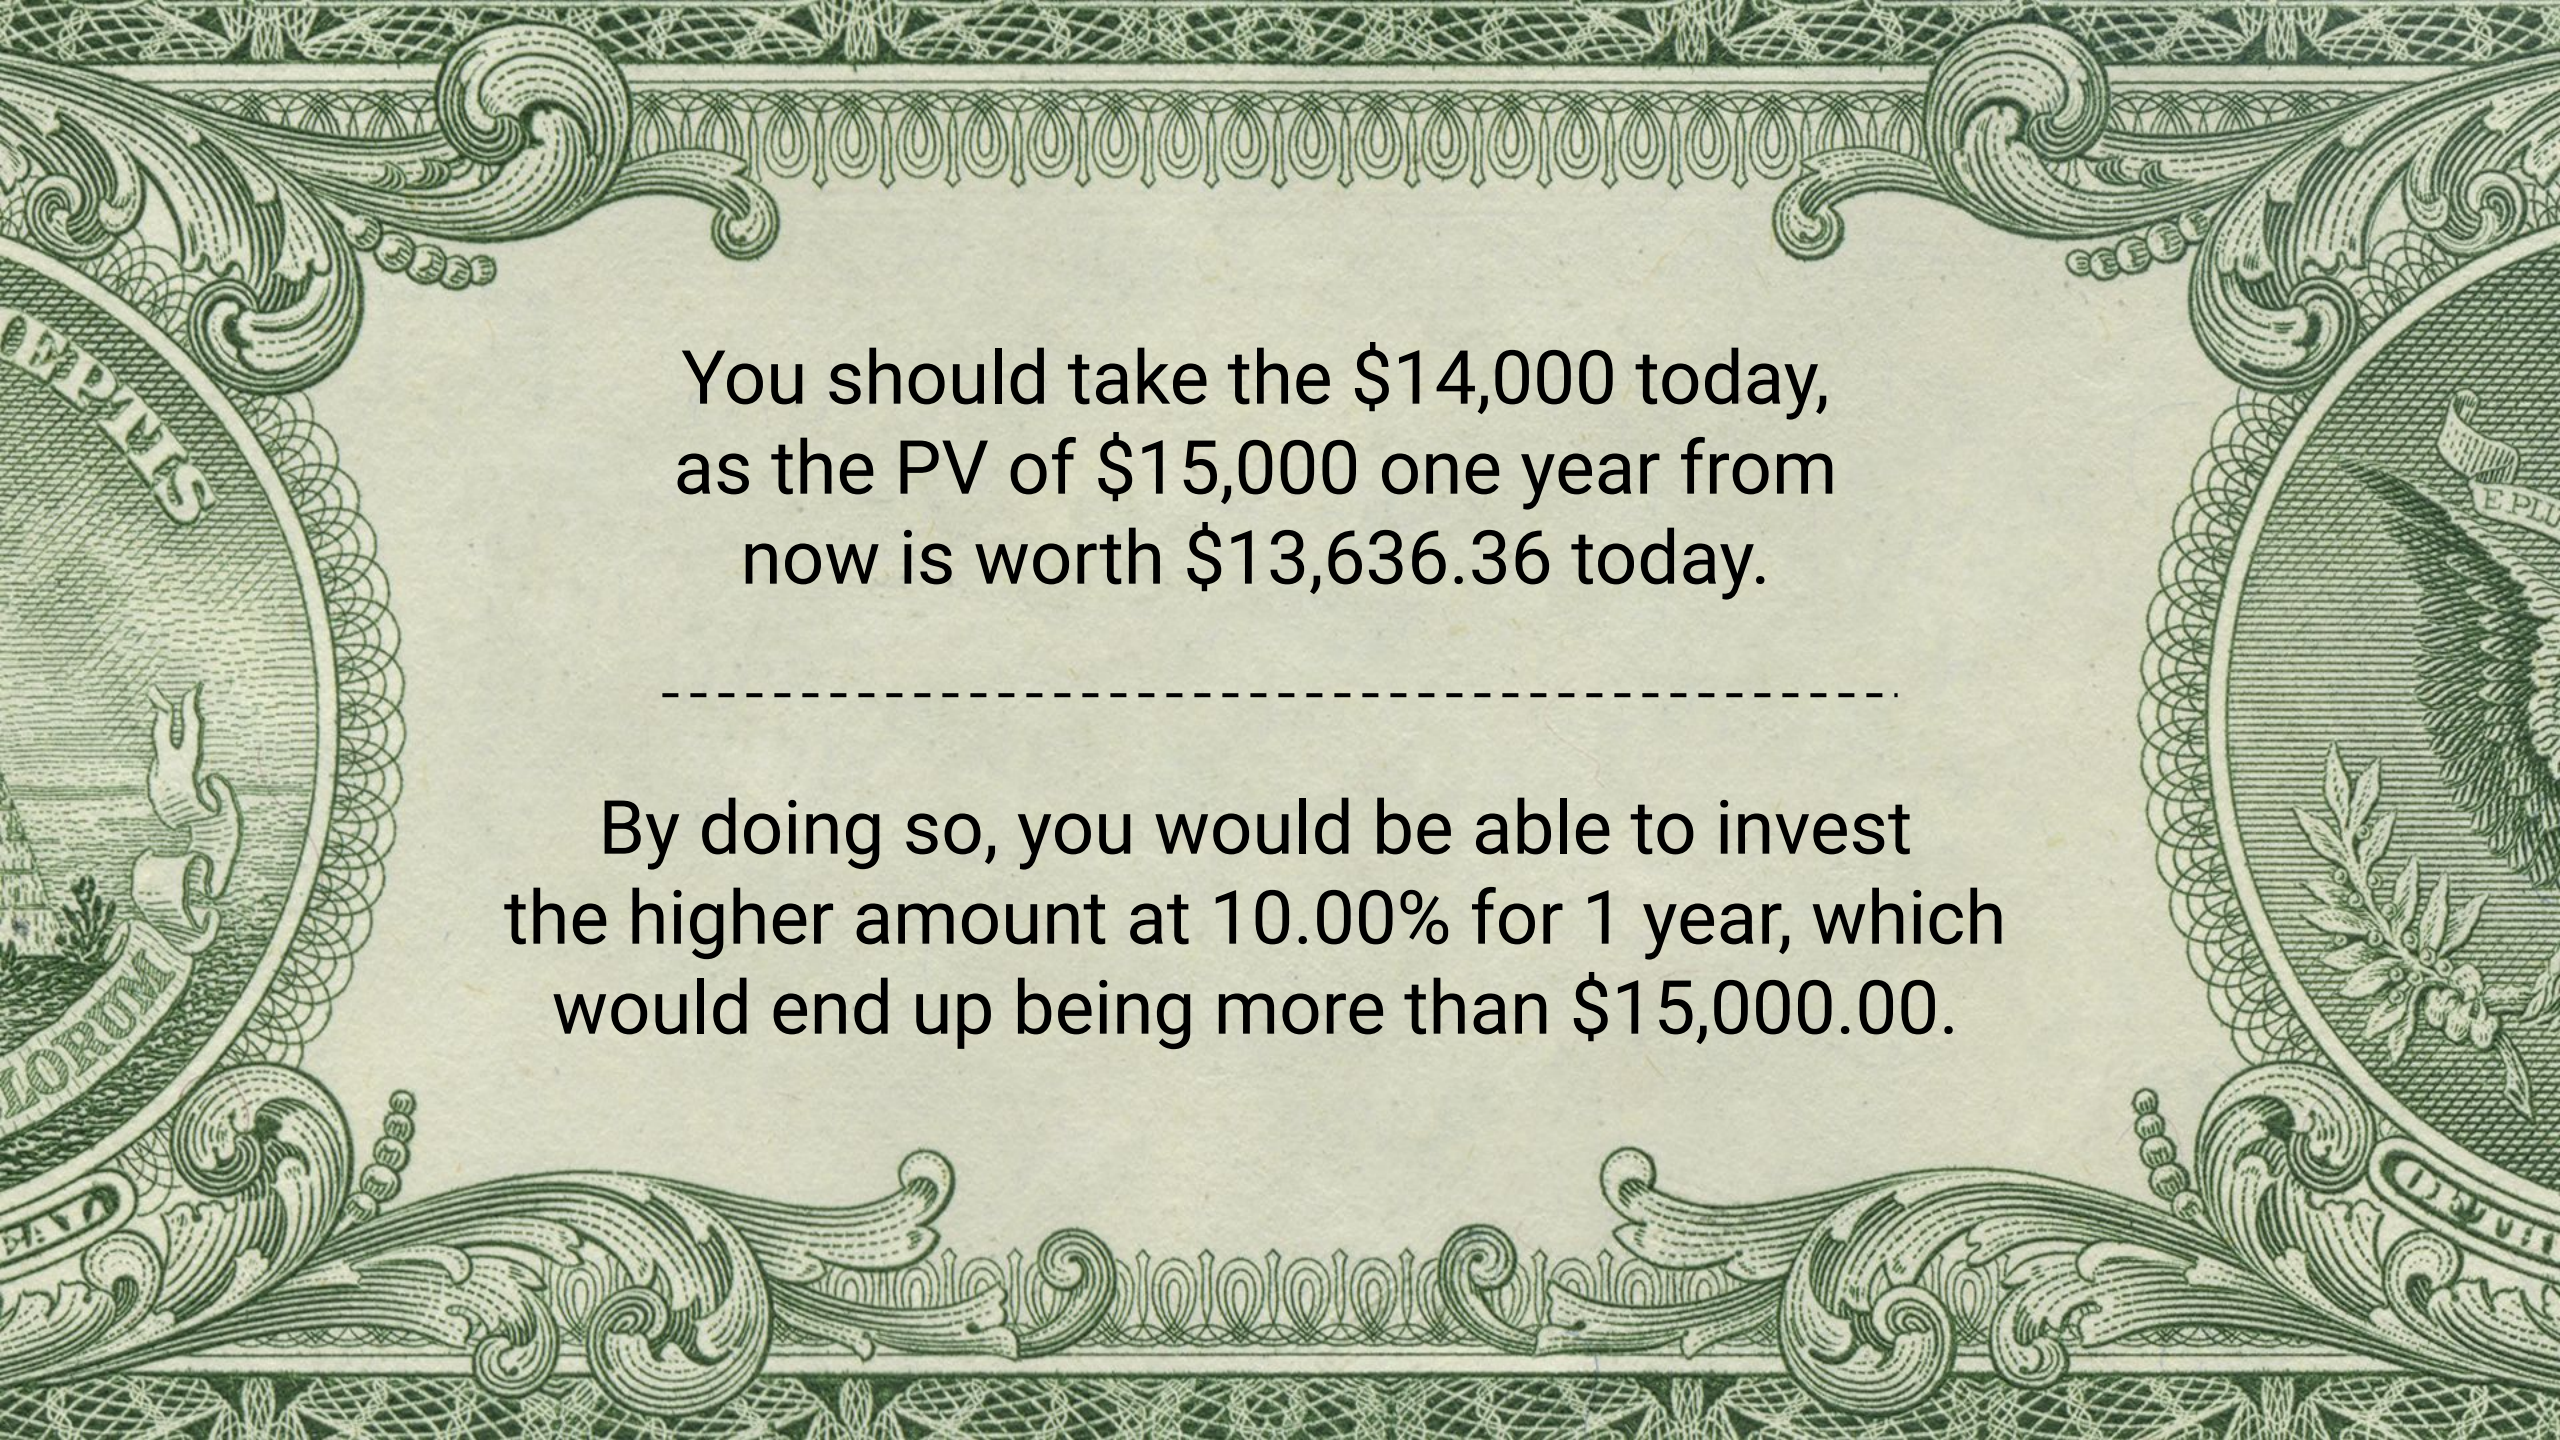

You should take the \$14,000 today,
as the PV of \$15,000 one year from
now is worth \$13,636.36 today.

By doing so, you would be able to invest
the higher amount at 10.00% for 1 year, which
would end up being more than \$15,000.00.

Time Value of Money: Other Considerations


The value today of receiving **\$15,000.00** in 1 year:

$$PV = \$15,000 / (1 + (10\% / 1) ^ (1 \times 1)) = \$13,636$$

Difference in Investment:


$$13,636 \times 1.1 = \$15,000$$

$$14,000 \times 1.1 = \$15,400$$

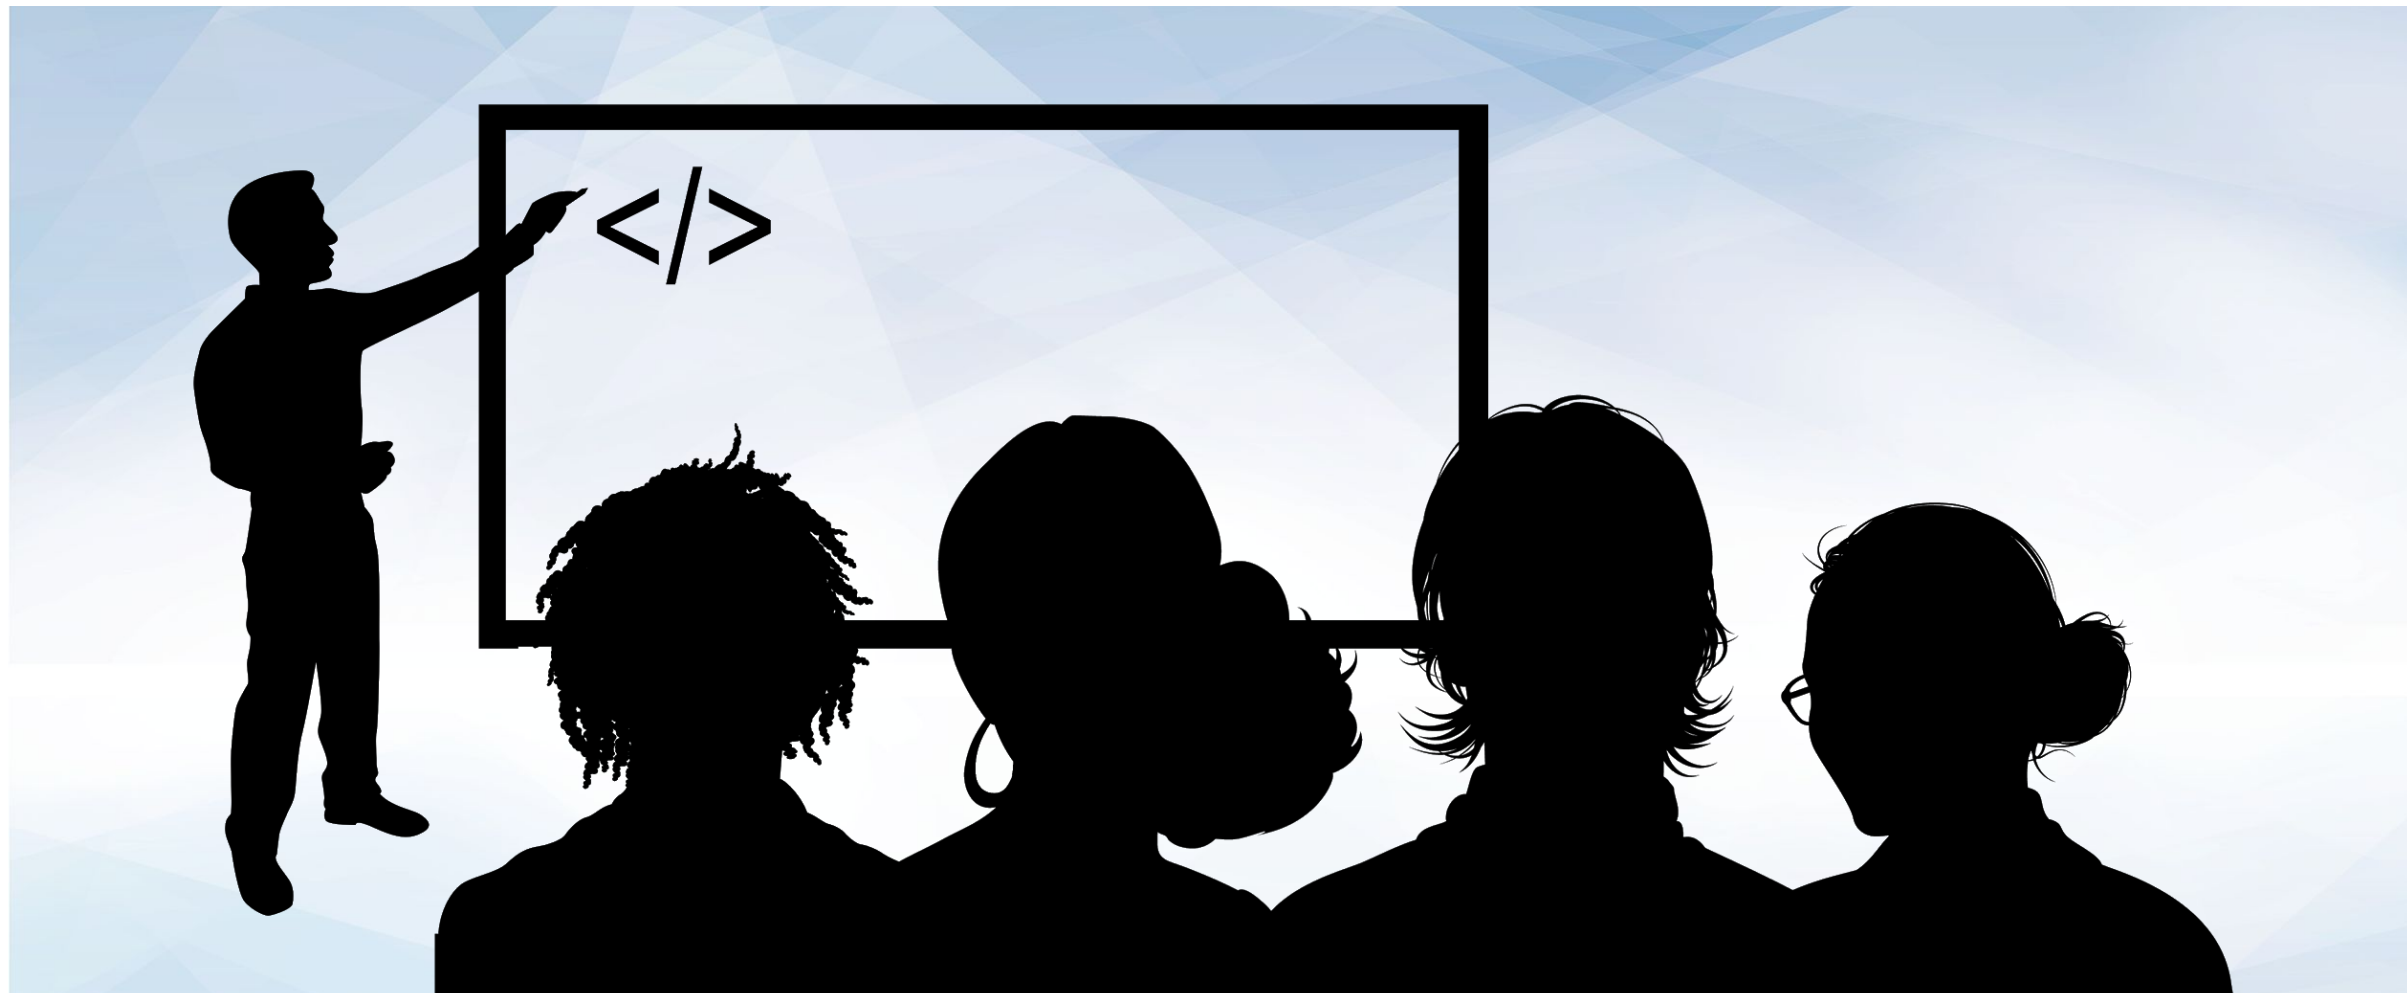

Instructor Demonstration

Time Value of Money

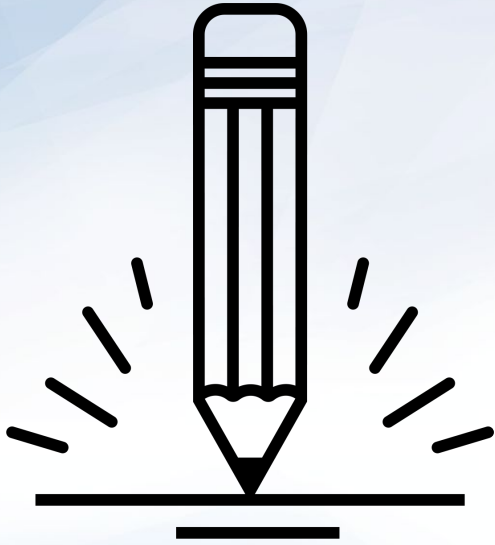

Activity: Zero Coupon Bonds

In this activity, you will use the concept of time value of money (TVM) to discount the future value of a zero-coupon bond to determine its present value. You will also compare the present value to its current selling price in order to decide whether or not to purchase the bond.

(Instructions sent via Slack)

Suggested Time:
25 Minutes





Time's Up! Let's Review.

Net Present Value

Net Present Value

What does net present value mean?

Net present value (NPV) is the difference between the sum of present values of future cash flows and the absolute value of an initial investment.

$$\text{NPV} = \text{Cash Flow} / (1 + i)^t - | \text{Initial Investment} |$$

i = Discount rate or return that could be earned in alternative investments

t = Number of years

Net Present Value

So how is NPV used?


Net present value (NPV) can help financial analysts determine the profitability of potential projects that involve initial investments and projected future cash flows, and, therefore, what action they should take.

Example:


A proposed project costs \$1,000 and is projected to return cash flows of \$400 in Year 1, \$400 in Year 2, \$400 in Year 3, and \$400 in Year 4. Assume the discount rate is 10%. Is this project worth it?

$$\text{NPV} = \$400 / (1 + 0.10)^1 + \$400 / (1 + 0.10)^2 + \$400 / (1 + 0.10)^3 + \$400 / (1 + 0.10)^4 - \$1,000 = \$267.94617853971704$$

Therefore, according to the NPV calculation, this project is PROFITABLE and SHOULD be undertaken.

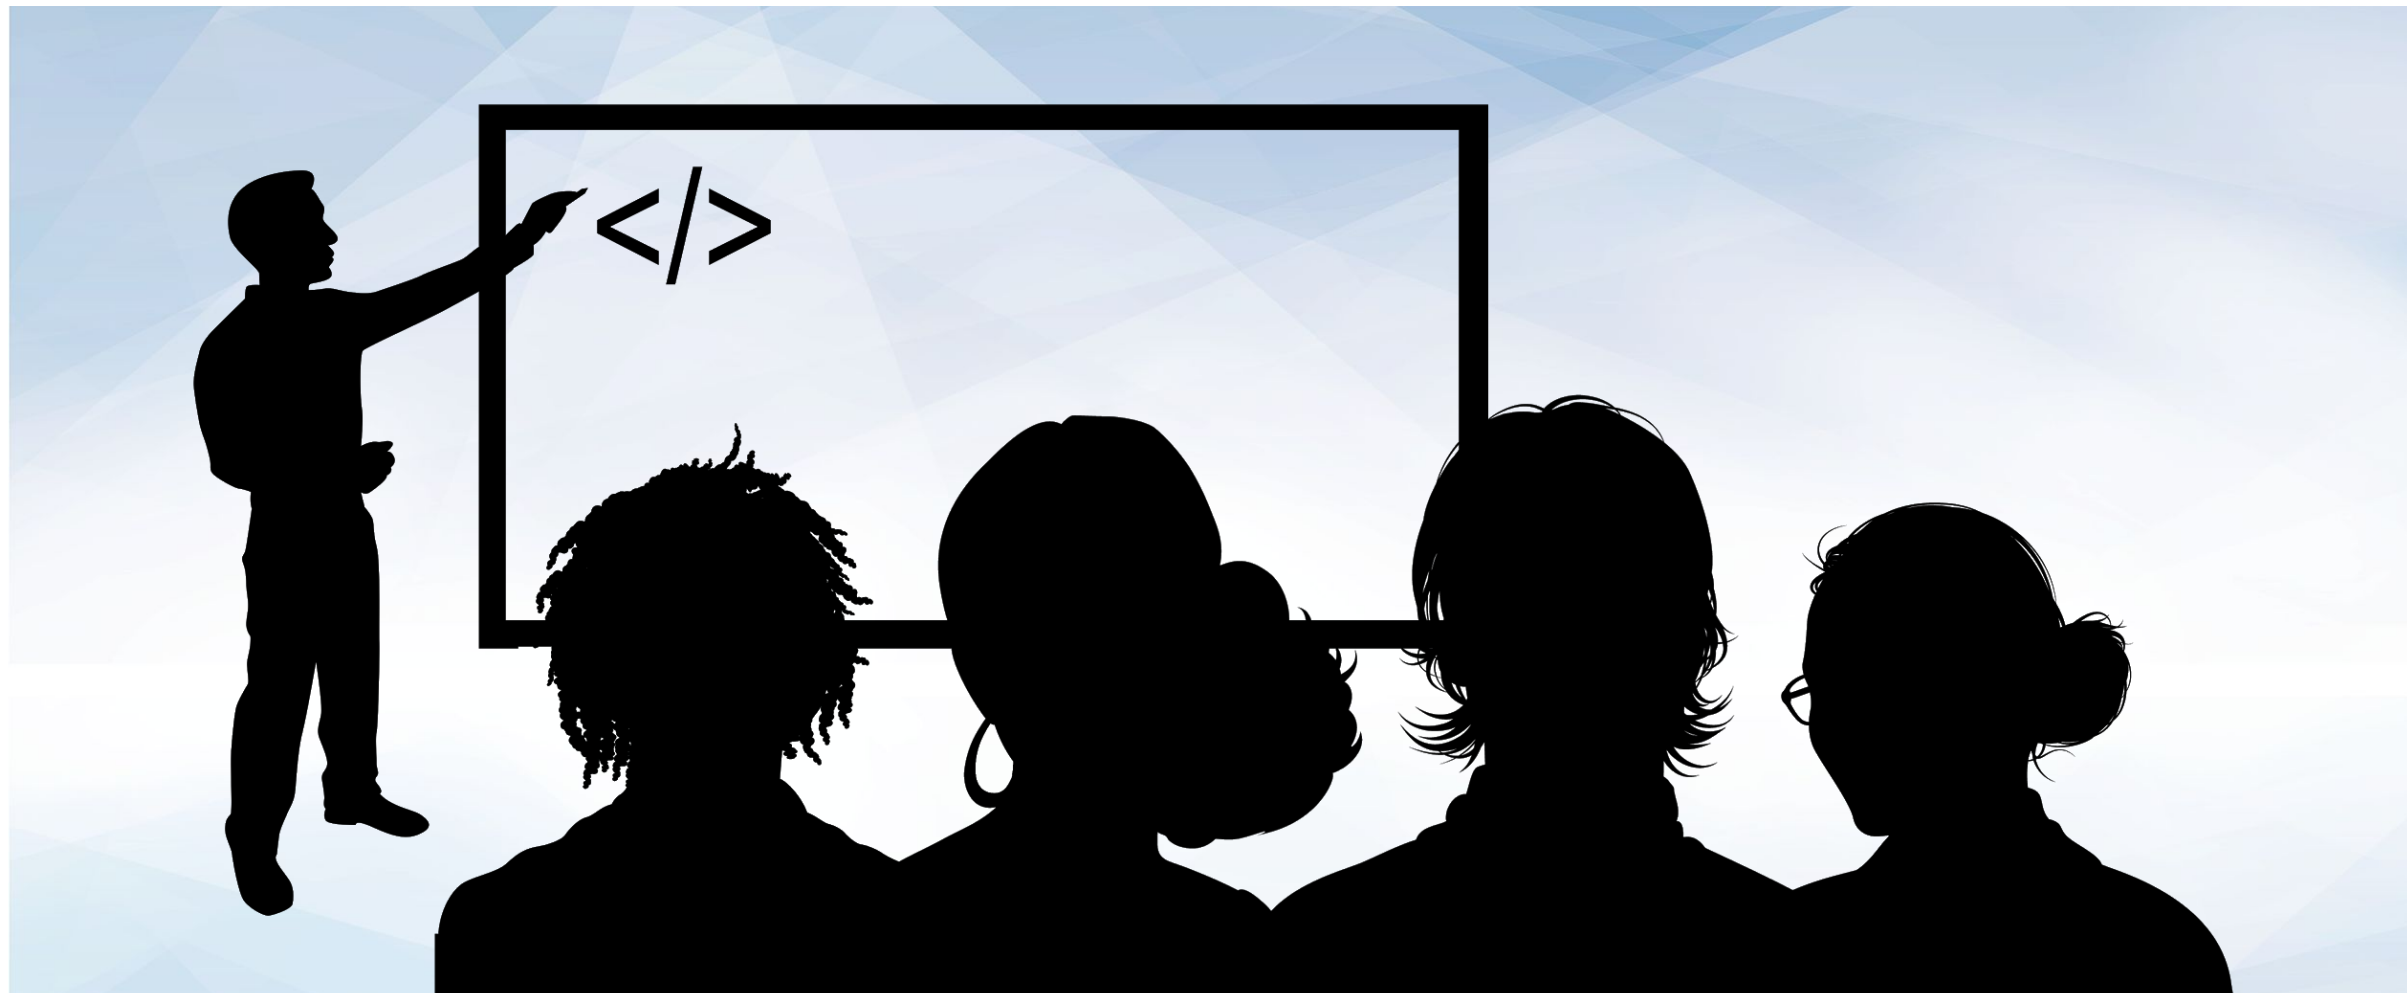

Instructor Demonstration Imports

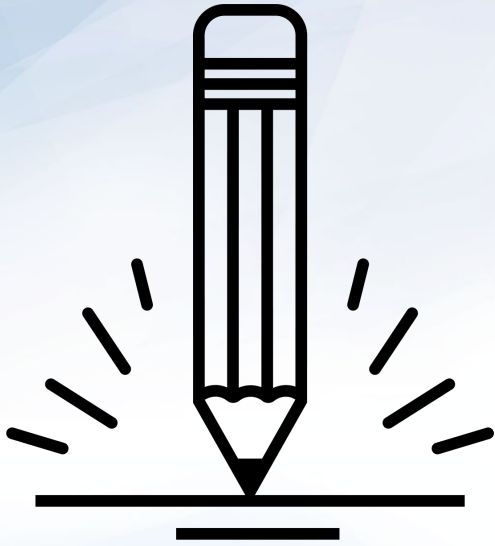

Activity: Net Present Value

In this activity, you will perform financial analysis on three potential company projects that are categorized as conservative, neutral, and aggressive. Then, you will use the NPV function to determine which project scenario is the optimal choice.


(Instructions sent via Slack)

Suggested Time:
15 Minutes






Time's Up! Let's Review.

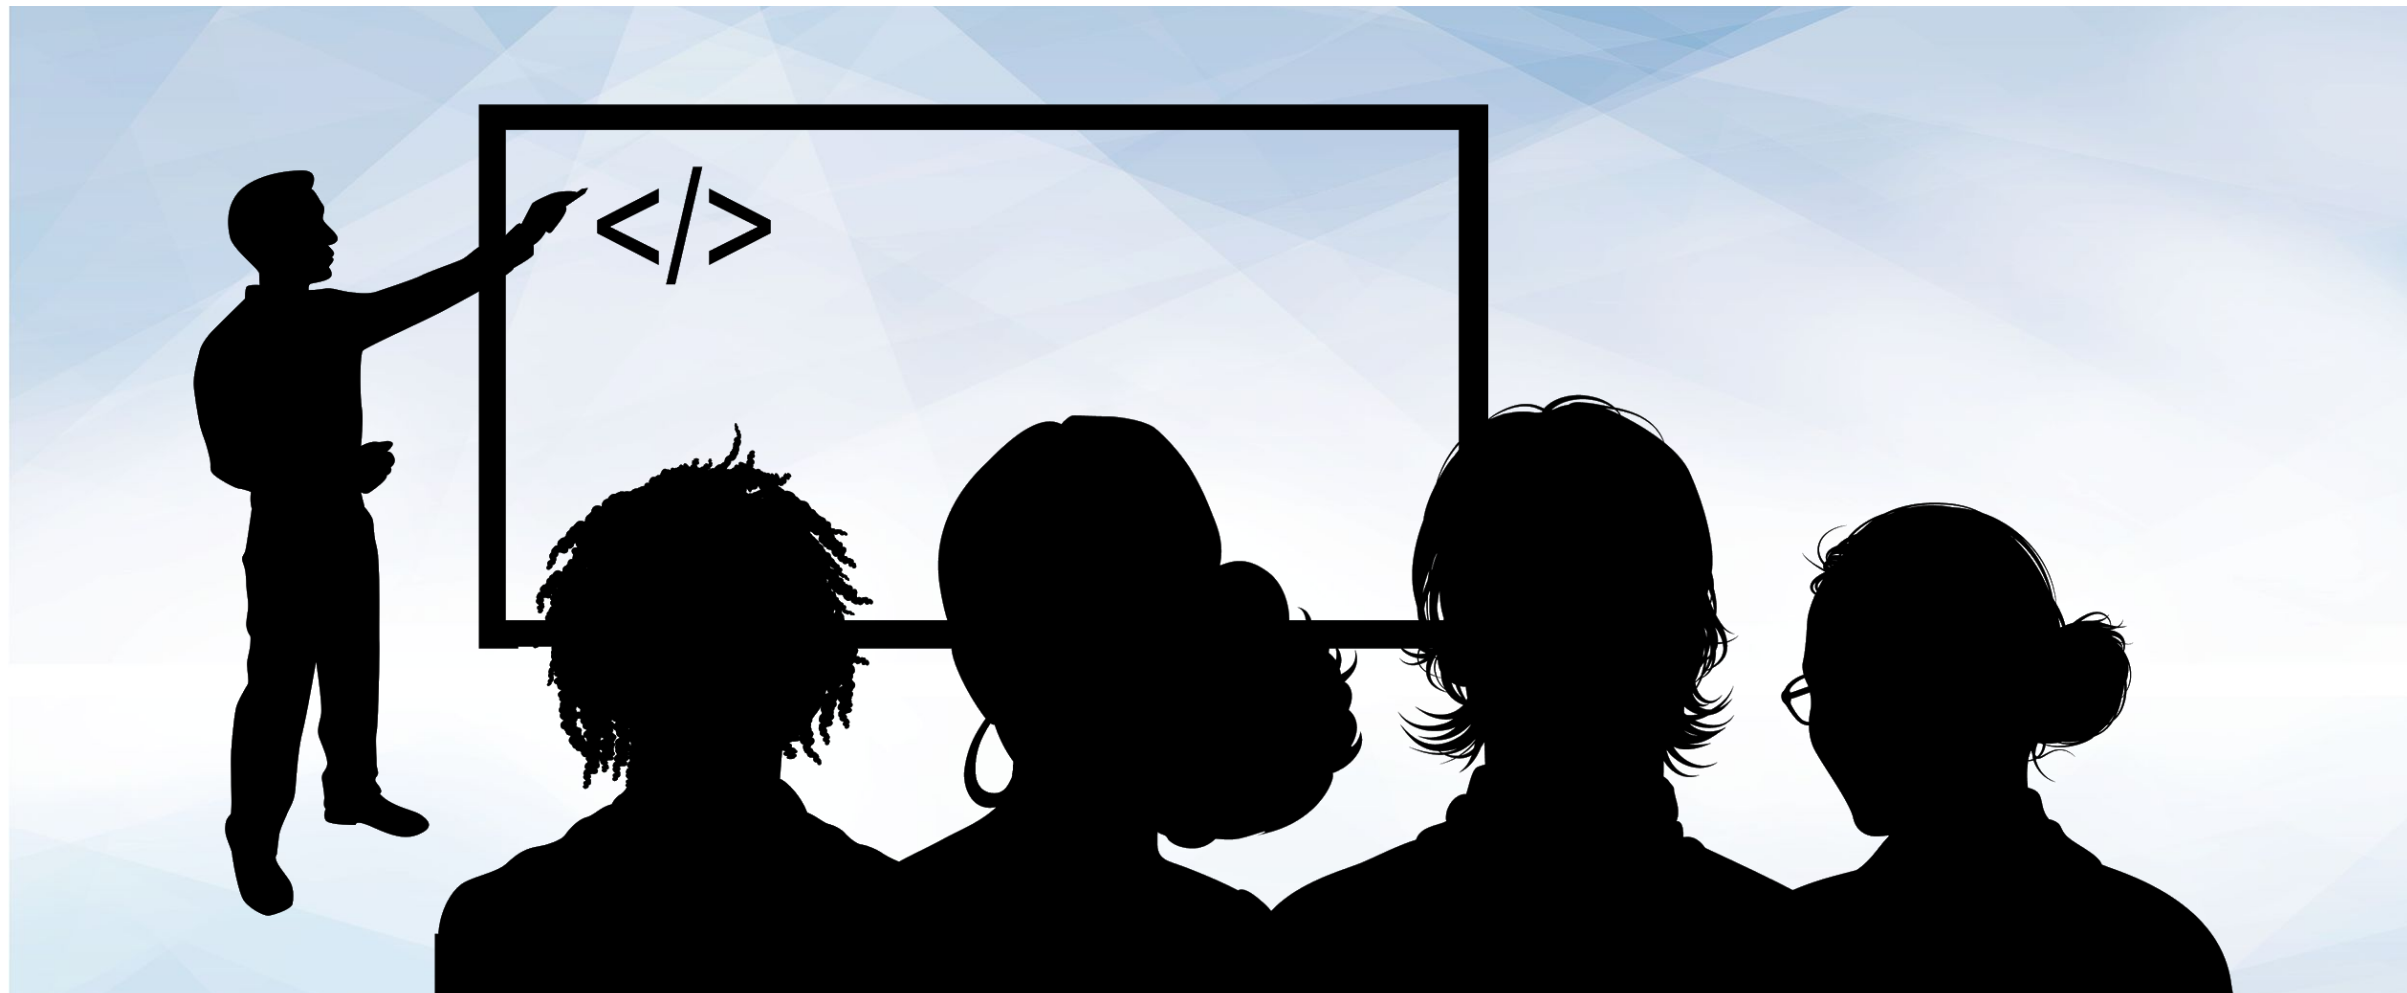

Instructor Demonstration

File I/O

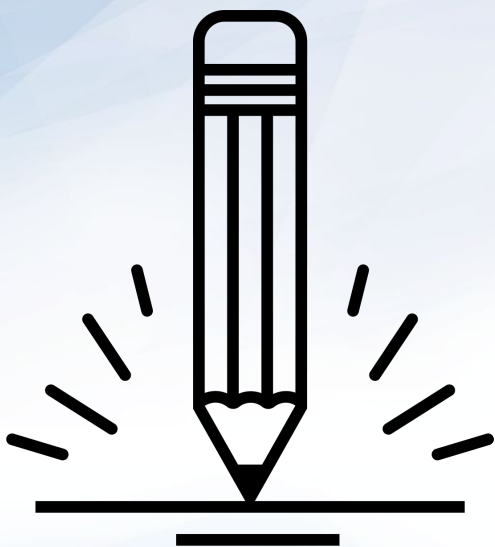

Activity: E-Commerce Traffic

In this activity, you will parse a text file. You'll sum the total number of customers and count of days in the text file to calculate the daily average of customer traffic for your e-commerce business. Assume each line is equal to a day's worth of customers.

(Instructions sent via Slack)

Suggested Time:
15 Minutes





Time's Up! Let's Review.



Countdown timer

40:00

(with alarm)




Break

Tabular Data

What Is Tabular Data?

Quite simply, **tabular data** is data organized in a table format, in which there are rows, columns, and values at the intersection of those rows and columns.

Value “Coghill” at the
intersection of Row 12
and Column Salesperson



	A	B	C	D	E	F
1	Country	Salesperson	Order Date	OrderID	Units	Order Amount
2	USA	Fuller	1/01/2011	10392	13	1,440.00
3	UK	Gloucester	2/01/2011	10397	17	716.72
4	UK	Bromley	2/01/2011	10771	18	344.00
5	USA	Finchley	3/01/2011	10393	16	2,556.95
6	USA	Finchley	3/01/2011	10394	10	442.00
7	UK	Gillingham	3/01/2011	10395	9	2,122.92
8	USA	Finchley	6/01/2011	10396	7	1,903.80
9	USA	Callahan	8/01/2011	10399	17	1,765.60
10	USA	Fuller	8/01/2011	10404	7	1,591.25
11	USA	Fuller	9/01/2011	10398	11	2,505.60
12	USA	Coghill	9/01/2011	10403	18	855.01
13	USA	Finchley	10/01/2011	10401	7	3,868.60
14	USA	Callahan	10/01/2011	10402	11	2,713.50
15	UK	Rayleigh	13/01/2011	10406	15	1,830.78
16	USA	Callahan	14/01/2011	10408	10	1,622.40
17	USA	Farnham	14/01/2011	10409	19	319.20
18	USA	Farnham	15/01/2011	10410	16	802.00


Tabular Data Files

There are two common types of tabular data files:

01

CSV (Comma-Separated Values)

Each row has values separated by a comma.

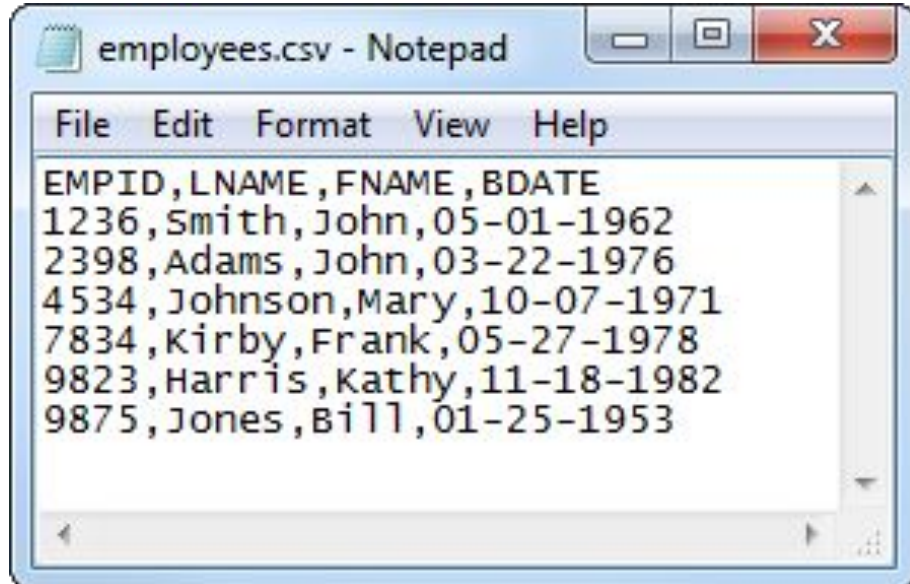


```
File Edit Format View Help
EMPID,LNAME,FNAME,BDATE
1236,Smith,John,05-01-1962
2398,Adams,John,03-22-1976
4534,Johnson,Mary,10-07-1971
7834,Kirby,Frank,05-27-1978
9823,Harris,Kathy,11-18-1982
9875,Jones,Bill,01-25-1953
```


02

Delimited Files

Each row has values separated by a specific **delimiter**. This example shows values delimited by a pipe character, |.

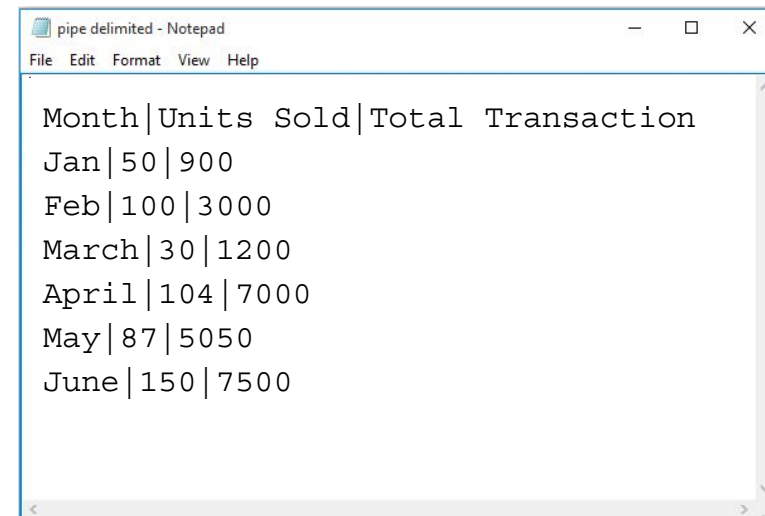


```
File Edit Format View Help
Month|Units Sold|Total Transaction
Jan|50|900
Feb|100|3000
March|30|1200
April|104|7000
May|87|5050
June|150|7500
```

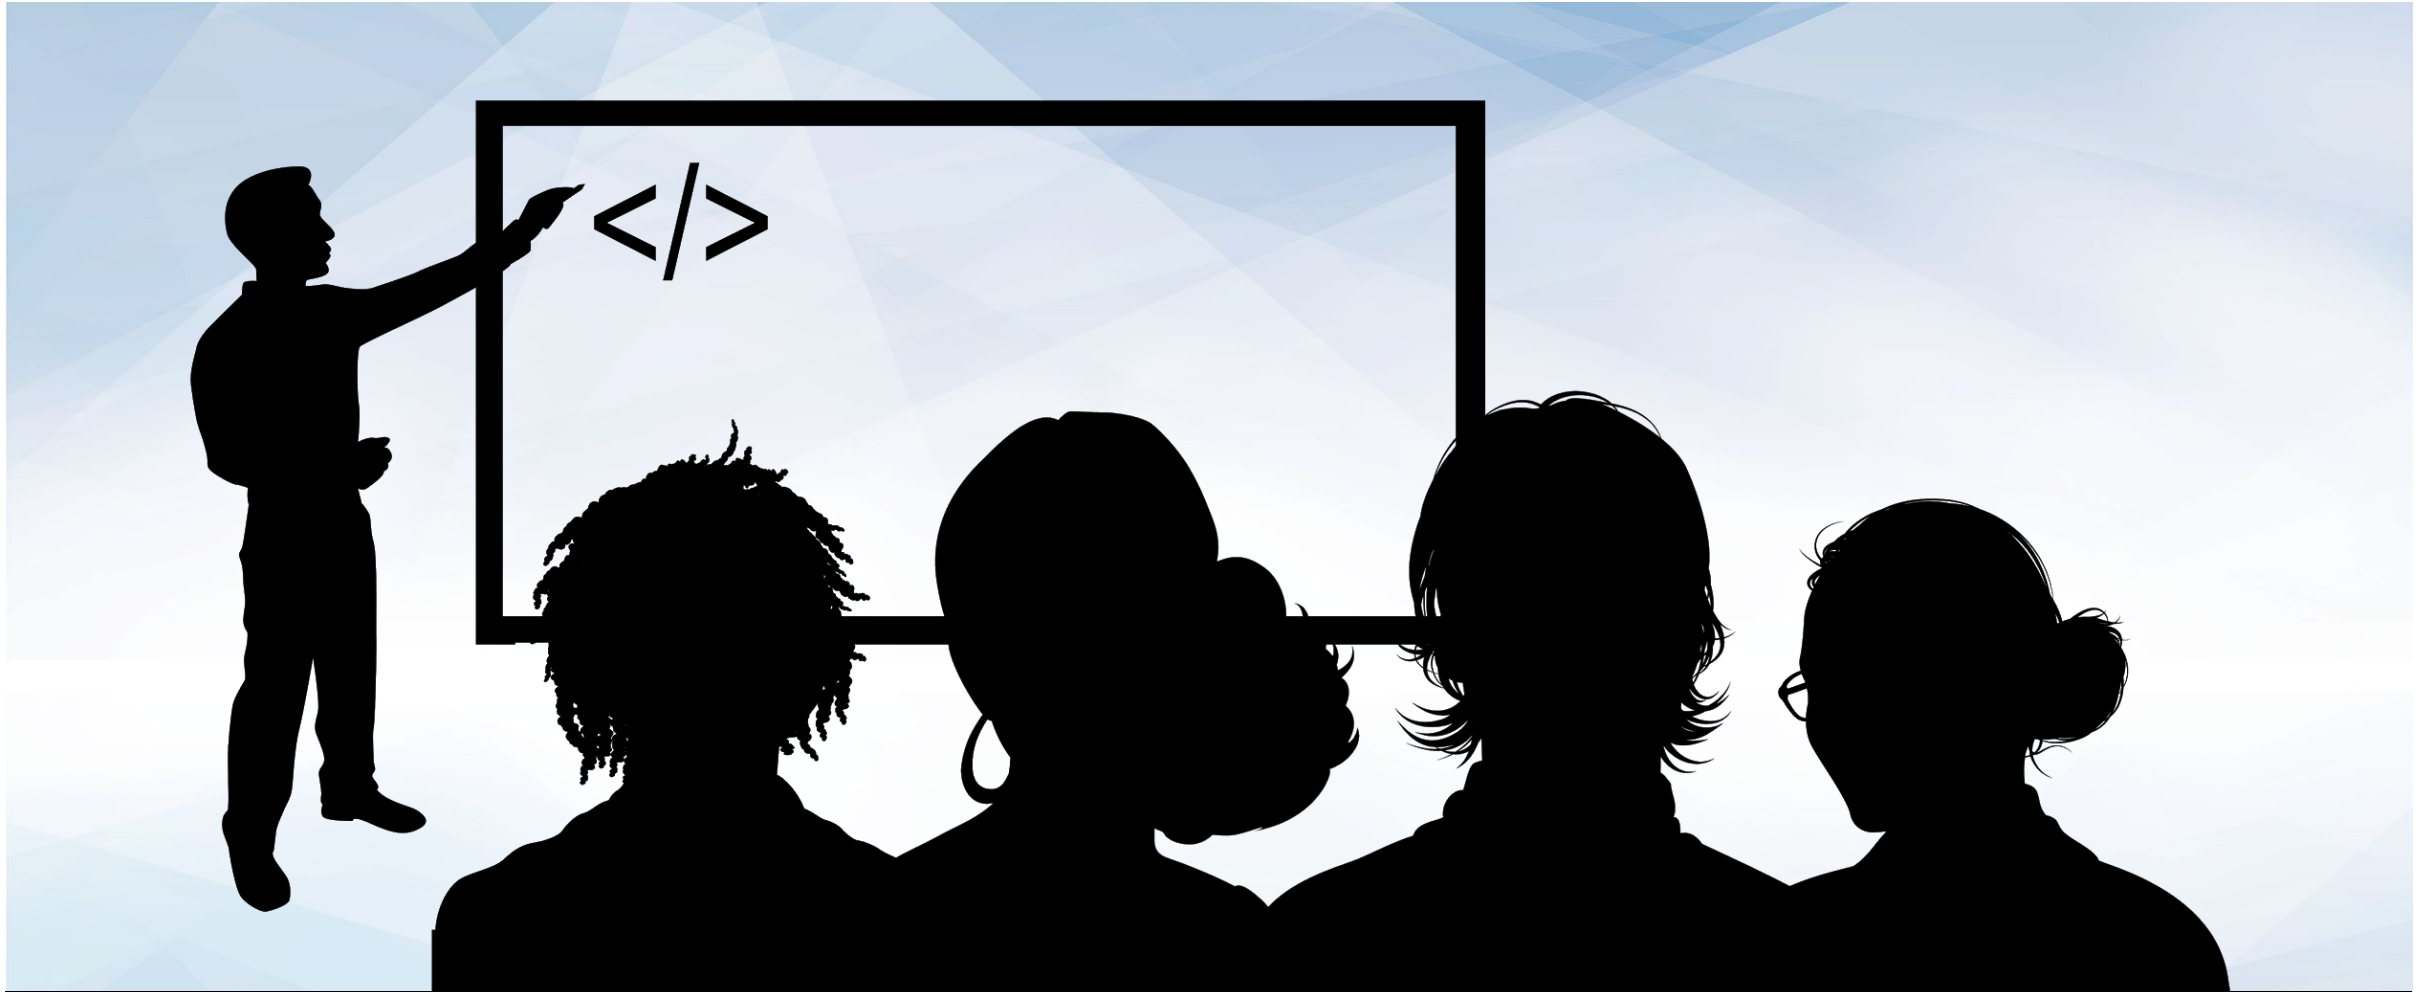

Instructor Demonstration

CSV Reader

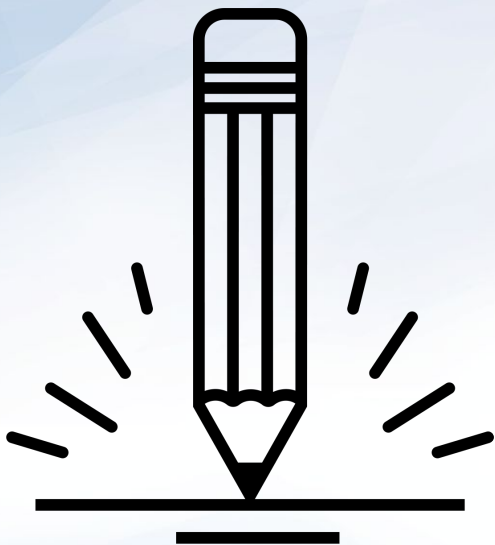

Activity: Sales Analysis

In this activity, you will read in the `sales.csv` file to calculate customer revenue averages.

(Instructions sent via Slack)

Suggested Time:
15 Minutes





Time's Up! Let's Review.

The background of the slide is a dark, textured surface composed of a repeating pattern of triangles in various shades of black and dark gray, creating a subtle 3D effect.

Questions?

Appendix

Function Anatomy

Function Anatomy


Defining the function, parameters, and return values:

```
1
2
3  def create_phase(name):
4      greeting = f"Hi {name} it's nice to meet you!"
5      return greeting
6
7  sentence = create_phase("Andrew")
8  print(sentence)
9
```

Function Anatomy

Defining the function, parameters, and return values:

Defines the
function `name` and
the parameters it
supports.




```
1  
2  
3 def create_phase(name):  
4     greeting = f"Hi {name} it's nice to meet you!"  
5     return greeting  
6  
7 sentence = create_phase("Andrew")  
8 print(sentence)  
9
```

Function Anatomy

Defining the function, parameters, and return values:

The function uses
the name parameter
as a substitute for a
dynamically created
greeting string.




```
1
2
3  def create_phase(name):
4      greeting = f"Hi {name} it's nice to meet you!"
5      return greeting
6
7  sentence = create_phase("Andrew")
8  print(sentence)
9
```

Function Anatomy

Defining the function, parameters, and return values:

```
1
2
3  def create_phase(name):
4      greeting = f"Hi {name} it's nice to meet you!"
5      return greeting
6
7  sentence = create_phase("Andrew")
8  print(sentence)
9
```



The function **returns** the greeting variable.

Function Anatomy

Defining the function, parameters, and return values:


Calls the function
and assigns the
return value to the
variable `sentence`.



```
1
2
3  def create_phase(name):
4      greeting = f"Hi {name} it's nice to meet you!"
5      return greeting
6
7  sentence = create_phase("Andrew")
8  print(sentence)
9
```

Function Anatomy

Showcasing the Python function and output:

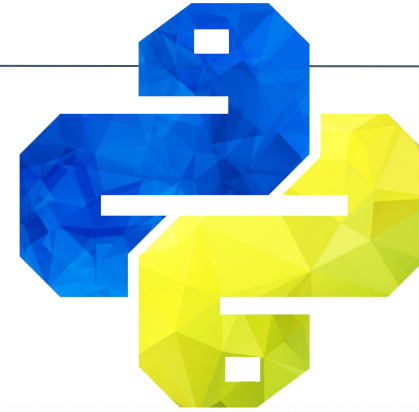

```
1
2
3  def create_phase(name):
4      greeting = f"Hi {name} it's nice to meet you!"
5      return greeting
6
7  sentence = create_phase("Andrew")
8  print(sentence)
9
```

```
Desktop — -bash — 80x24
[Administrators-MacBook-Pro:Desktop andrewyang$ python phrase.py
Hi Andrew it's nice to meet you!
Administrators-MacBook-Pro:Desktop andrewyang$
```