


Devops – Exercise 8


```
PS D:\vivek\7th_Sem\devops-sample-code> git init -b main
Initialized empty Git repository in D:/Vivek/7th_Sem/devops-sample-code/.git/
PS D:\vivek\7th_Sem\devops-sample-code> git remote add origin https://github.com/abvivek28/devops-sample-code.git
PS D:\vivek\7th_Sem\devops-sample-code> git add hello-world.sh
warning: in the working copy of 'hello-world.sh', LF will be replaced by CRLF the next time Git touches it
```

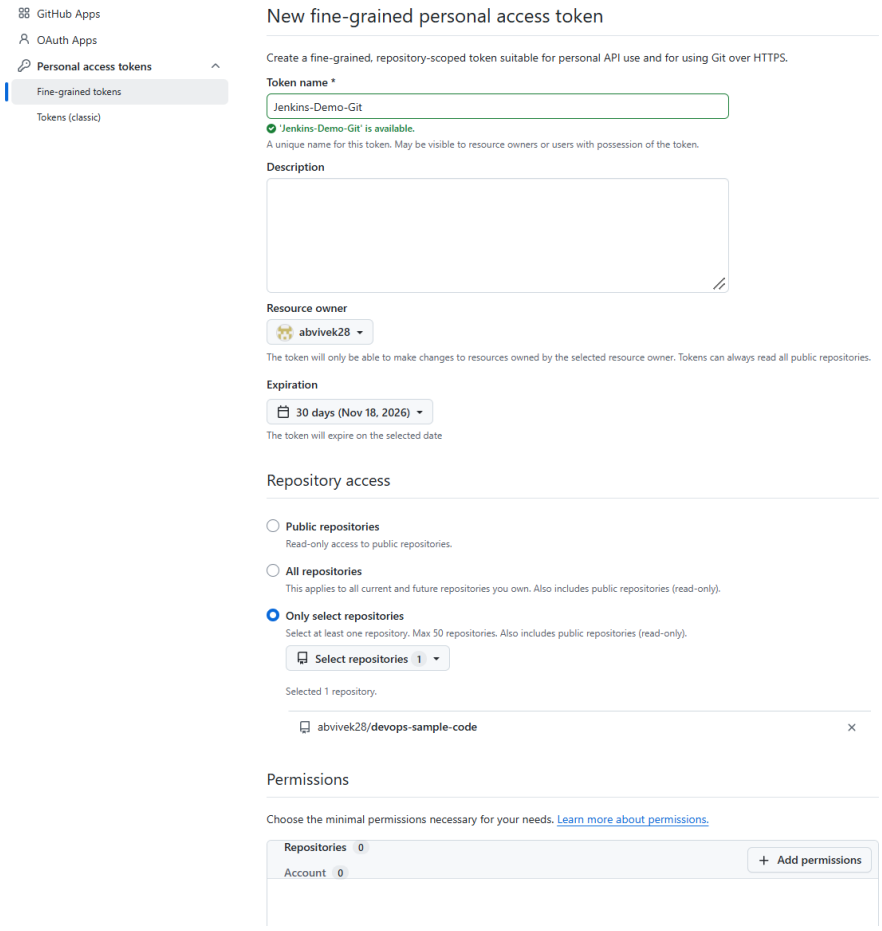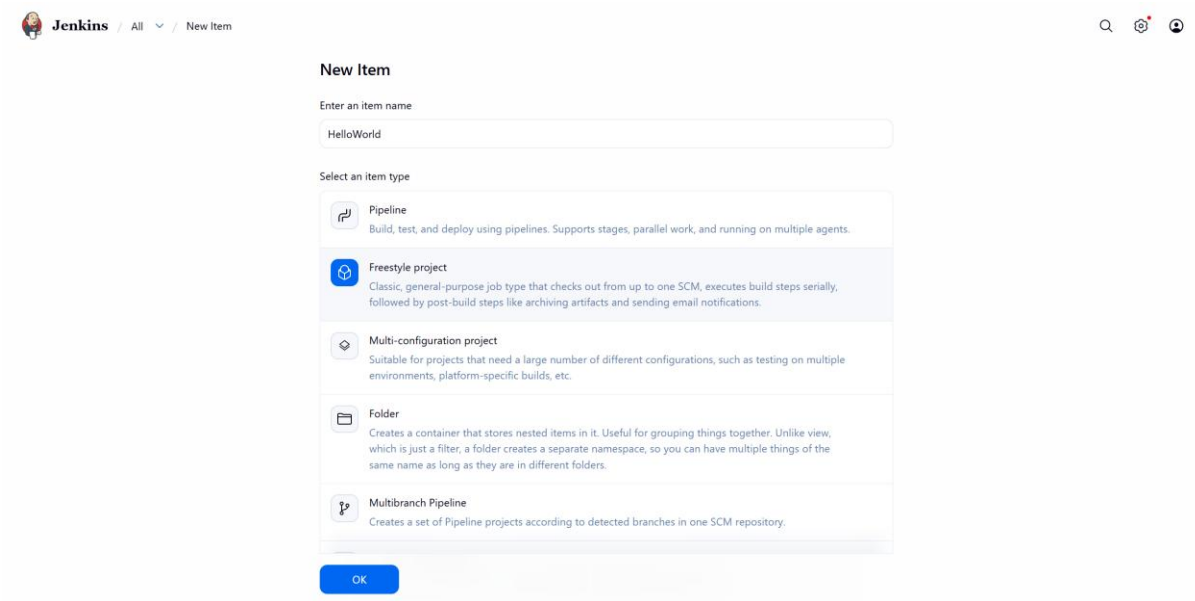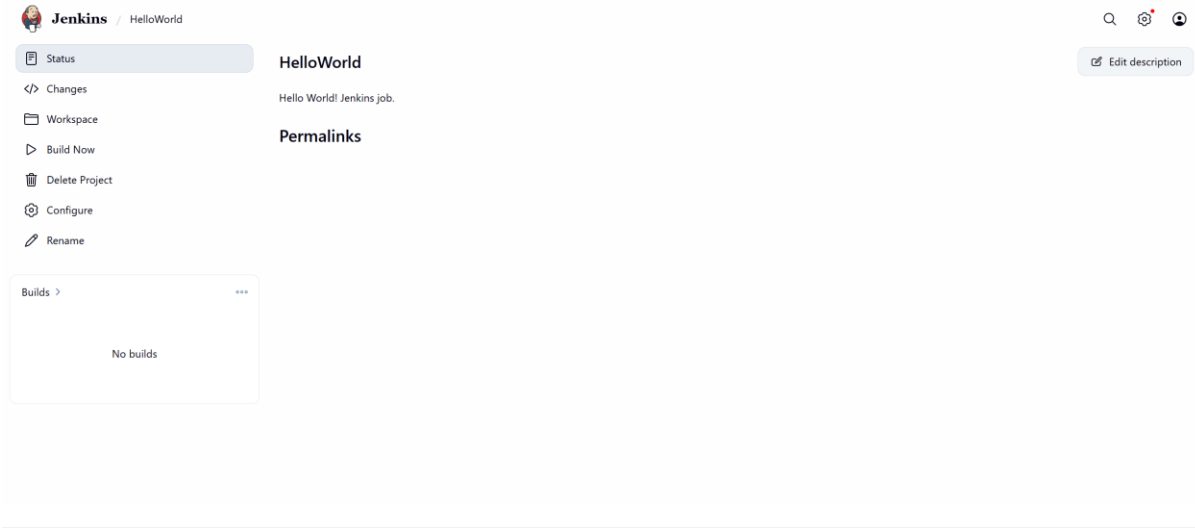



```
PS D:\vivek\7th_Sem\devops-sample-code> git commit -m "Add hello-world.sh"
[main (root-commit) 58286cb] Add hello-world.sh
 1 file changed, 2 insertions(+)
 create mode 100644 hello-world.sh
PS D:\vivek\7th_Sem\devops-sample-code> git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 256 bytes | 256.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/abvivek28/devops-sample-code.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```


Jenkins / All / New Item
New Item
Enter an item name
HelloWorld
Select an item type
Pipeline
Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.
Freestyle project
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
Multi-configuration project
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
Folder
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.
Multibranch Pipeline
Creates a set of Pipeline projects according to detected branches in one SCM repository.
OK


Jenkins / HelloWorld
Status
Changes
Workspace
Build Now
Delete Project
Configure
Rename
Builds
No builds
HelloWorld
Edit description
Hello World! Jenkins job.
Permalinks

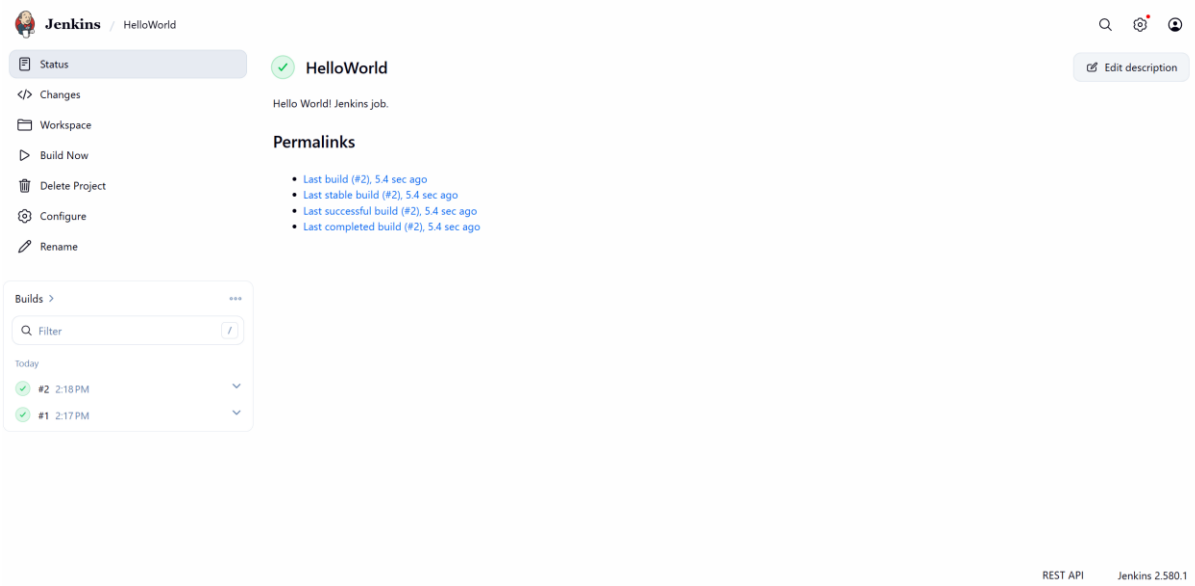
Jenkins / HelloWorld
Status
Changes
Workspace
Build Now
Delete Project
Configure
Rename
Builds
Filter
Today
#2 2:18 PM
#1 2:17 PM
HelloWorld
Edit description
Hello World! Jenkins job.
Permalinks
Last build (#2), 5.4 sec ago
Last stable build (#2), 5.4 sec ago
Last successful build (#2), 5.4 sec ago
Last completed build (#2), 5.4 sec ago
REST API
Jenkins 2.580.1

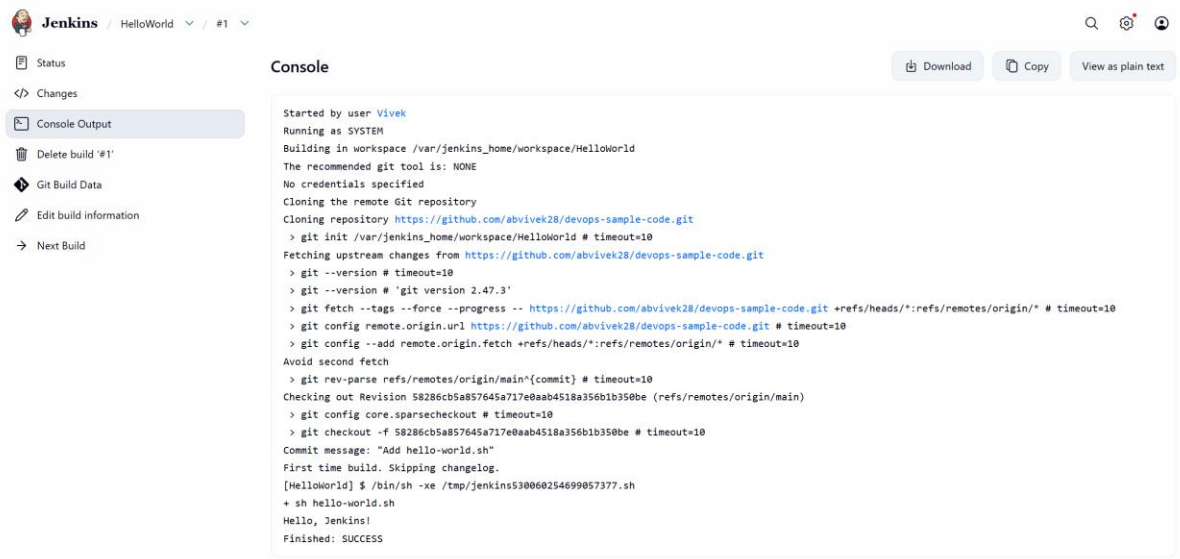
Jenkins / HelloWorld / #1
Status
Changes
Console Output
Delete build '#1'
Git Build Data
Edit build information
Next Build
Console
Download
Copy
View as plain text
Started by user Vivek
Running as SYSTEM
Building in workspace /var/jenkins_home/workspace/HelloWorld
The recommended git tool is: NONE
No credentials specified
Cloning the remote Git repository
Cloning repository https://github.com/abvivek28/devops-sample-code.git
> git init /var/jenkins_home/workspace/HelloWorld # timeout=10
Fetching upstream changes from https://github.com/abvivek28/devops-sample-code.git
> git --version # timeout=10
> git --version # 'git version 2.47.3'
> git fetch --tags --force --progress -- https://github.com/abvivek28/devops-sample-code.git +refs/heads/*:refs/remotes/origin/* # timeout=10
> git config remote.origin.url https://github.com/abvivek28/devops-sample-code.git # timeout=10
> git config --add remote.origin.fetch +refs/heads/*:refs/remotes/origin/* # timeout=10
Avoid second fetch
> git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 58286cb5a857645a717e0aab4518a356b1b350be (refs/remotes/origin/main)
> git config core.sparsecheckout # timeout=10
> git checkout -f 58286cb5a857645a717e0aab4518a356b1b350be # timeout=10
Commit message: "Add hello-world.sh"
First time build. Skipping changelog.
[HelloWorld] $ /bin/sh -xe /tmp/jenkins5300602546990577377.sh
+ sh hello-world.sh
Hello, Jenkins!
Finished: SUCCESS