

Introduction to **CSS**

HTML course: Lesson 3



Lesson Plan

1

What is CSS and what does it consist of

2

What are selectors, properties, and their values

3

How to link styles to a page

4

Viewport and units, colors

5



How to work with fonts

Cascading Style Sheet

CSS level 3



Describes how elements should be displayed on various media such as screens, paper, speech, or other media.

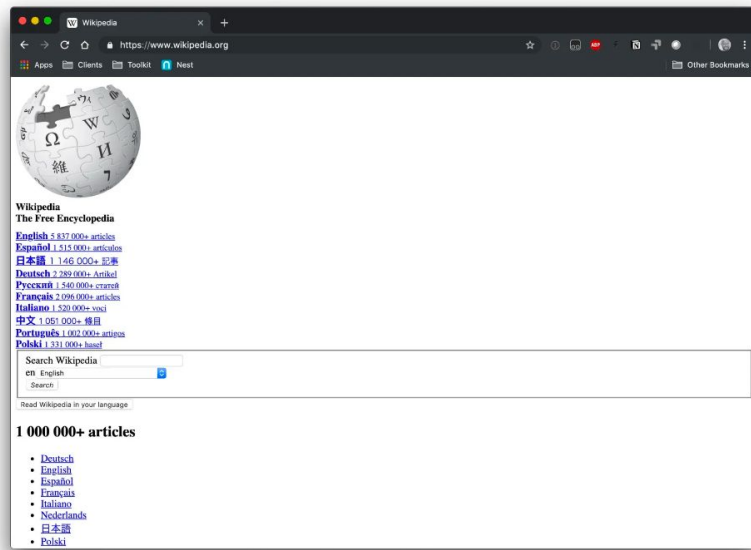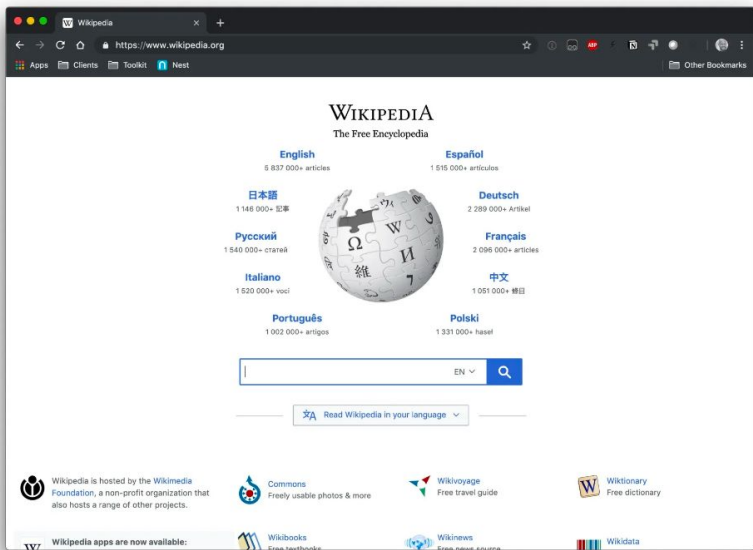

CSS

Consists of Rules:

Selectors are expressions that tell the browser which HTML element to apply the CSS properties defined within the style block.

Inside a **rule**, **selectors** and **declaration blocks** are defined, consisting of **properties** and their **values**.



shorthand properties



```
.box {  
  padding-top: 5px;  
  padding-right: 10px;  
  padding-bottom: 10px;  
  padding-left: 5px;  
}
```

That's **92 characters**, totaling **92 bytes**.

```
.box {  
  padding: 5px 10px 10px 5px;  
}
```

That's **37 characters**, totaling **37 bytes**.

- background
- font
- border
- outline
- margin
- padding
- list

Types of

Selectors

- Tag Selector

`h1 {}`

- Class Selector

`.main-heading {}`

- ID Selector

`#reasons-section {}`

- Attribute Selector

`a[href] {}`

- Pseudo-classes

`a:hover {}`

- Pseudo-elements

`p::first-line {}`

- Universal Selector

`* {}`

- Grouped Selectors

`h1, .heading {}`

Selector Combinators

descendant combinator	space	<code>body article p</code>	elements are nested inside each other	<pre><body> <article> <p></p> </article> </body></pre>	<pre><body> <section> <p></p> </section> <p></p> </body></pre>
child combinator	<code>></code>	<code>article > p</code>	an element is an immediate child	<pre><article> <p></p> <a> </article></pre>	<pre><article> <div> <p></p> </div> <p></p> </article></pre>
adjacent sibling combinator	<code>+</code>	<code>p + img</code>	an element that comes immediately after	<pre><article> <p></p> <a> </article></pre>	<pre><article> <p></p> <a> </article></pre>
general sibling combinator	<code>~</code>	<code>p ~ img</code>	an element located anywhere below in the code, inside a common parent	<pre><article> <p></p> <a> </article></pre>	<pre><article> <p></p> <a> </article></pre>

Selector

Combinations

<code>p { }</code>	<pre><p class="intro module"></p> <div class="intro"></div> <p class="default-text"></p></pre>
<code>p a { }</code>	<pre><p> <div> <a> <a> </p> </div></pre>
<code>.intro { }</code>	<pre><p class="intro"></p> <div class="intro"></div></pre>
<code>div.intro { }</code>	<pre><p class="intro"></p> <div class="intro"></div></pre>
<code>.intro.module { }</code>	<pre><p class="module"></p> <p class="module intro"></p> <p class="intro module"></p> <p class="intro"></p></pre>

<code>.intro .module { }</code>	<pre><p class="intro module"></p> <div class="intro module"> <p class="module"></p> </div></pre>
<code>.intro, .module { }</code>	<pre><p class="intro"></p> <div class="module"></div></pre>
<code>.intro { } ≠ .Intro { }</code>	<pre><p class="intro"></p> <div class="Intro"></div></pre>
<code>.nav ul li a { }</code>	<pre>.nav a { }</pre>
<code>/* comment */</code>	
Selectors are read from right to left <code>nav ul li { }</code>	The rule applies to the <code>li</code> element, which is part of the <code>ul</code> element, which is inside the <code>nav</code> element.

Attribute

class

Used for styling with CSS

- Class name can be arbitrary
- A good class name should answer the question, "What does this element do?"
- Do not name classes **by content, style, or tag**, as they may change
- **Avoid using numbers** in class names; the order of blocks may change
- Use only **English words**, **no transliteration**
- Written in **lowercase**
- No spaces in class names; use **hyphens** for compound class names
- Preferably no **more than three words** in a class name
- An element can have many classes

Examples

class

Not recommended	Best practices
<code>class="krasnaya-knopka"</code>	<code>class="error-button"</code>
<code>class="PageHeader"</code>	<code>class="page-header"</code>
<code>class="first-heading"</code>	<code>class="main-heading"</code>
<code>class="section-main-important-text"</code>	<code>class="primary-text"</code>
<code>class="green-heading"</code>	<code>class="section-heading"</code>
<code>class="text-two"</code>	<code>class="default-text news-text"</code>


Connecting styles

1. Inline
2. Embedded
3. External




Inline styles

```
<p style="color: red; font-size: 14px;">text</p>
```




Embedded styles

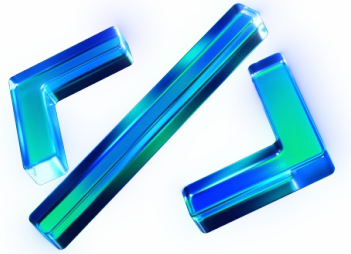


```
<head>
  <style>
    p {
      color: red;
      font-size: 14px;
    }
  </style>
</head>
```

External styles

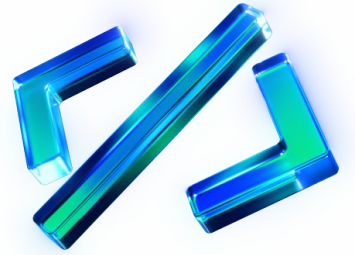

```
<head>  
  <link rel="stylesheet" href="styles.css">  
</head>
```



Applying Styles in **Order**

1

Inheritance

2

Cascading

3

Specificity

1

Browser Styles

2

User Styles


3

Author Styles

Default Browser Styles

User agent stylesheet

– styles present in any browser.

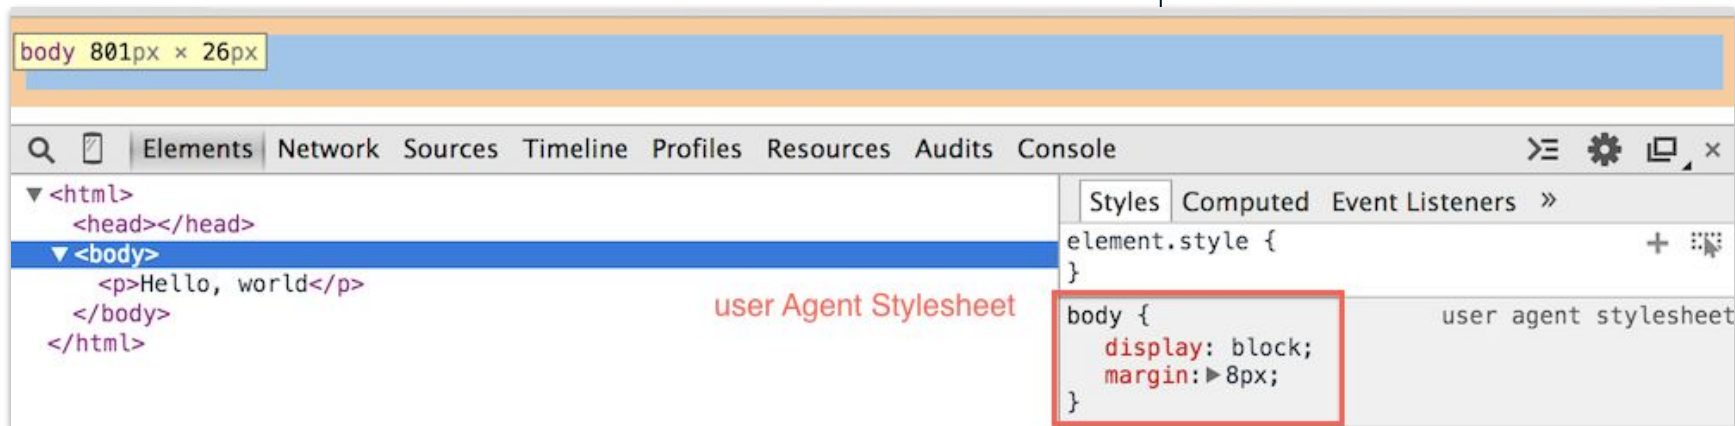

Способ приготовления

Шаг 1



Как получить миндальную муку:

- Миндальная мука можно приготовить следующим образом:
- В магазине, где продают орехи можно попросить, чтобы их смолотли в муку (они это делают в кофемолке).
- Просеять ее.
- Миндаль должен быть очищенным, если вы делаете белые макарруны.
- Если шоколадные макарруны, то можно миндаль брать обычный.

Как делать муку для макаррун:


1. Нагреть духовку до 150 градусов.
2. Смешать миндальную муку, сахарную пудру и какао в комбайне, 2 минуты.
3. Противень застелить бумагой для выпечки высыпать сухую смесь на лист, просушить в духовке в течение 5 минут.
4. Просеять через очень мелкое сито.

Шаг 2

- A. Приготовить ганаш.
- B. Сливки подогреть, добавить поломанный на кусочки шоколад.
- C. Размешать до полного растворения.
- D. Дать остыть и поставить в холодильник (желательно на ночь).

User styles

The user can customize fonts, colors, positions of links in the margins, and many other things.

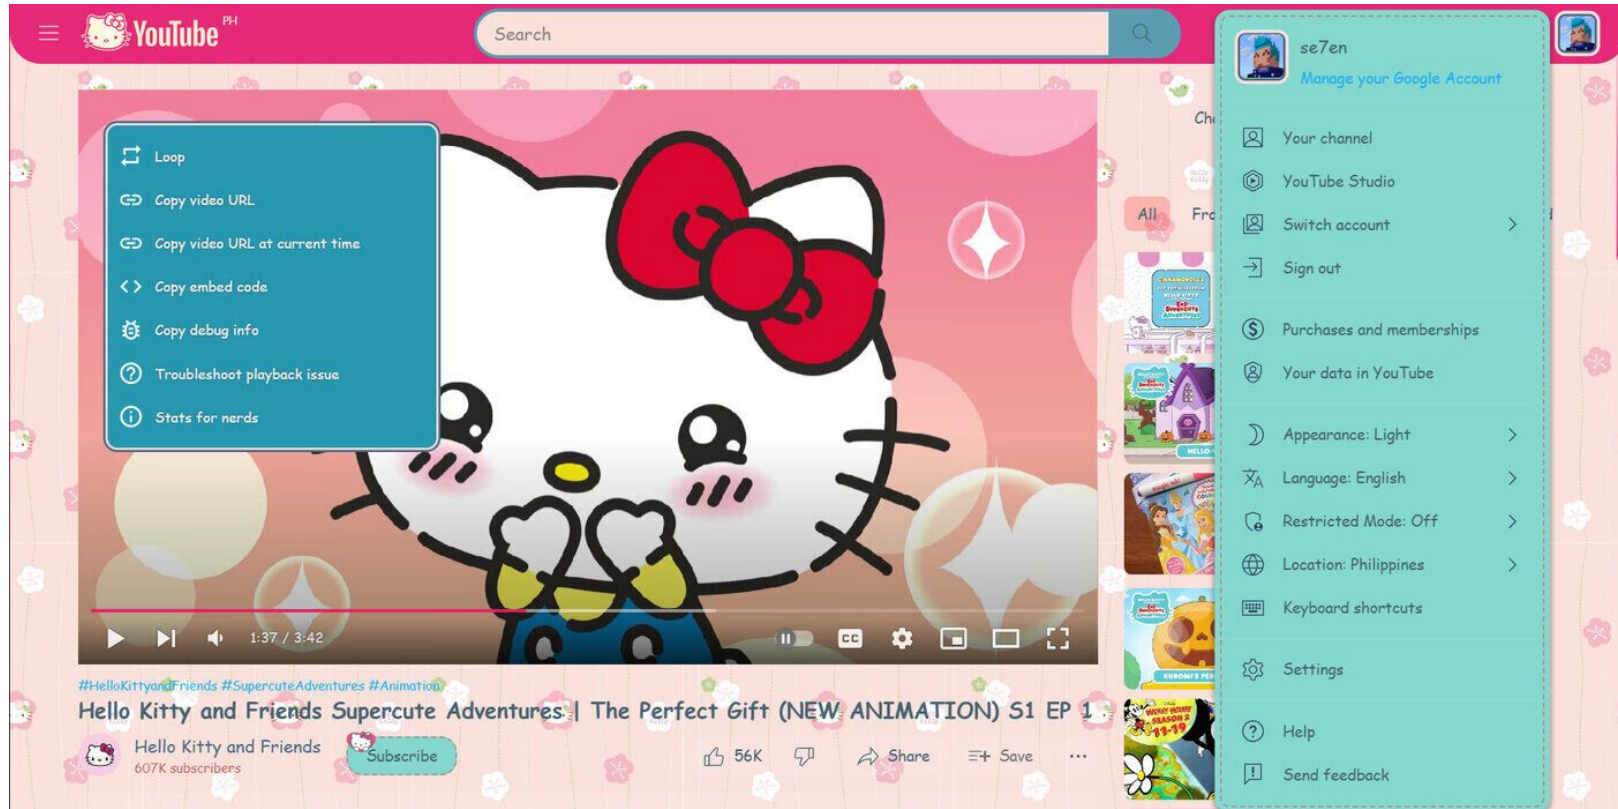

Author Styles

Site styles.

Top values for you

Try variety of benefits when using our services



Airport pickup

We provide escort from the airport to the hotel



Easy booking

Quick and easy booking of tours for upcoming dates



Best tour guide


Our best tour guide is ready to guide your trip



Lots of promos

Various promotions and drawings of tours


Choose your tour



5.0 ★

Alone with nature


\$100/person



4.9 ★

Jeep ride


\$200/person



5.0 ★

Hiking tour

\$150/person



4.8 ★

Corners of the island

\$220/person



See all

Enjoy your travel

Discover the most unique and vibrant experiences the Azores have to offer

Lighthouse Farol
Ponta do Arnel

Enjoy your travel

Discover the most unique and vibrant experiences the Azores have to offer

Lighthouse Farol
Ponta do Arnel

About us

The most exotic island in Europe in the center of the vast blue ocean, enveloped by a mild maritime climate and the paradisiacal beauty of untouched nature imaginable

Read all articles



5 min read



7 min read

Weather in the Azores

Weather Nature Azores



Beautiful nature

Beaches



Hiking in the mountains

Trails Nature Beaches

Let's get to know the Azores

Book now

About us

Our guides
Blog
Contact us

FAQ

Personal trip
Group trip
Tour payment

Further information


Terms of use
Health & safety
Privacy policy

© 2020, New York, USA

Facebook Instagram Twitter



user
agent



author
styles



local
user



base

base

base

!important

!important

!important

least
specific



most
specific

Reset and Normalize CSS

normalize.css

reset.css

- Maintains useful browser settings
- standardizes styles
- corrects errors and inconsistencies
- improves usability
- includes comments and documentation.

Connects to your style file:


```
<link rel="stylesheet" type="text/css"
href="https://necolas.github.io/normalize.css">
```

Visualizing CSS Resets

Resets bring sanity when dealing with cross-browser style inconsistencies.

Imagine that browsers were glasses and default styles were water...


Each browser applies a slightly different set of default styles

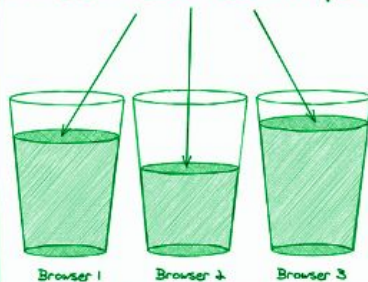

CSS Reset


Removes most styles requiring devs to add consistent styles

REMAINING STYLES DEV ADDED STYLES

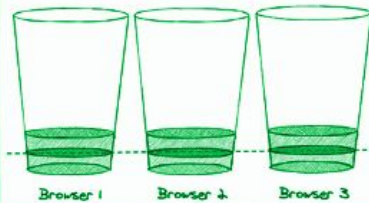

CSS Normalize

Removes only inconsistent styles and keeps as many common styles as possible

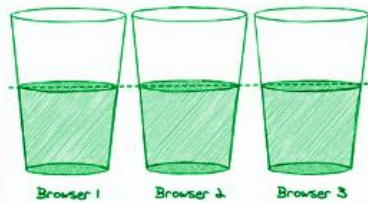

elijahmanor.com/css-resets

@elijahmanor

Practice:

● What color will be applied to the header

```
/* user-agent style sheet */
```

```
h2 { color: black; }
```

```
/* user style sheet */
```

```
h2 { color: green; }
```

```
/* author style sheet */
```

```
h2 { color: blue; }
```


Applying Styles in Order

1	1
Inheritance	Browser Styles
2	2
Specificity	User Styles
3	3
Cascading	Author Styles

Style

Inheritance

- + Styles don't need to be applied to every element.
- + Styles don't need to define every property for each element.
- + CSS files can be smaller, easier to read, and load faster.
- + Only properties that simplify the developer's work are inherited.

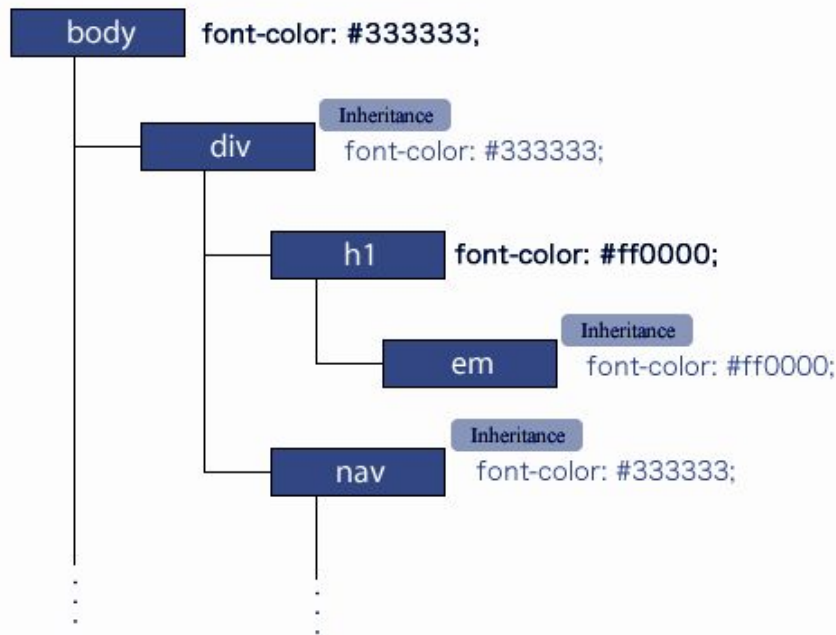

Style

Inherited

color: value;

List related properties

list-style-image: value;
list-style-position: value;
list-style-type: value;
list-style: value;



– styles that need to be set for body to be inherited by all page elements

Text related properties


font-family: value;
font-size: value;
font-style: value;
font-variant: value;
font-weight: value;
font: value;
letter-spacing: value;
line-height: value;
orphans: value;
text-align: value;
text-indent: value;
text-transform: value;
widows: value;
word-spacing: value;

Specificity of selectors

Determines which styles will be applied to an element based on the selector's weight.

Avoid overusing weight; try to create lightweight selectors.

Selector nesting should be no more than three levels.

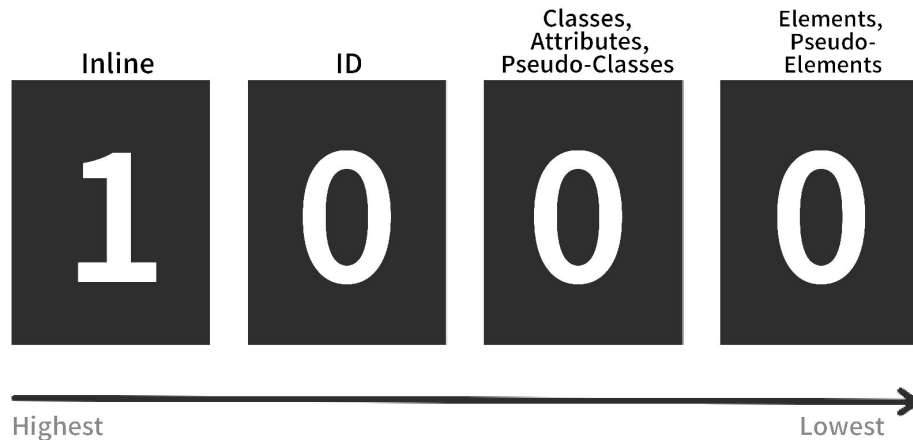

specificity = weight

universal selector * has no specificity weight (0)

	important	inline styles	id	class, attribute, pseudo-class	elements, pseudo-elements	
	10000	1000	100	10	1	
<code>.card a:hover</code>	0	0	0	10+10	1	21
<code>.card .heading::before</code>	0	0	0	10*2	1	21
<code>body #block > .card</code>	0	0	100	10	1	111
<code>.card .heading .highlight + a[href]</code>	0	0	0	10*3+10	1	error
<code>body main #block .card h2 ~ a</code>	0	0	100	10	1*4	114
<code>.default-link {...!important}</code>	10000	0	0	10	0	10010
<code></code>	0	1000	0	0	0	1000
<code></code>	10000	1000	0	0	0	11000

Specificity of selectors

Examples

```
<body>
  <main>
    <section id="block">
      <article class="card">
        <h2 class="heading">
          <span class="highlight"></span>
        </h2>
        <a class="default-link">
```

Practice: Calculating specificity

#header h1 span a { }


a =  x inline styles
b =  x ID
c =  x classes
d =  x elements
Specificity = 

.intro ::first-letter { }

a =  x inline styles
b =  x IDs
c =  x class
d =  x pseudo-element
Specificity = 

a[href^="http:"] { }

a =  x inline styles
b =  x IDs
c =  x attribute selector
d =  x element
Specificity = 

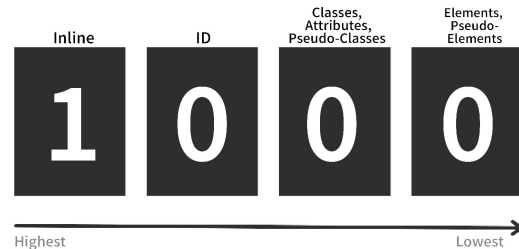

Practice: Calculating specificity

`#header h1 span a { }`

a = 0 x inline styles
b = 1 x ID (*#header*)
c = 0 x classes
d = 3 x elements (*h1,span,a*)
Specificity = 0,1,0,3

`.intro ::first-letter { }`

a = 0 x inline styles
b = 0 x IDs
c = 1 x class (*.intro*)
d = 1 x pseudo-element (*::first-letter*)
Specificity = 0,0,1,1

`a[href^="http:"] { }`

a = 0 x inline styles
b = 0 x IDs
c = 1 x attribute selector (*[href^="http:"]*)
d = 1 x element (*a*)
Specificity = 0,0,1,1

Practice:

● What color will be applied to the text


```
<div id="container">  
  <nav class="nav">  
    <p class="intro">
```

```
.nav p { color: yellow; }
```

```
p { color: blue; }
```

```
div#container p { color: purple; }
```

```
p.intro { color: orange; }
```

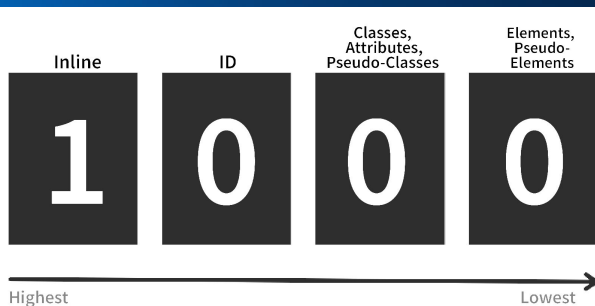

Practice:

● What color will be applied to the text

<code>.nav p { color: lime; }</code>	<code>0,0,1,1</code>
--------------------------------------	----------------------

<code>p { color: blue; }</code>	<code>0,0,0,1</code>
---------------------------------	----------------------

<code>div#container p { color: purple; }</code>	<code>0,1,0,2</code>
---	----------------------

<code>p.intro { color: green; }</code>	<code>0,0,1,1</code>
--	----------------------

Cascading

Styles


When selectors have the same weight,
the one defined later will be applied

that **Cascading** Style Sheet

```
/* green will be applied */  
h1 {  
    background-color: red;  
}  
h1 {  
    background-color: green;  
}
```

Summary

1. CSS syntax
2. What selectors are
3. The order in which styles are applied
4. How to link styles to a page

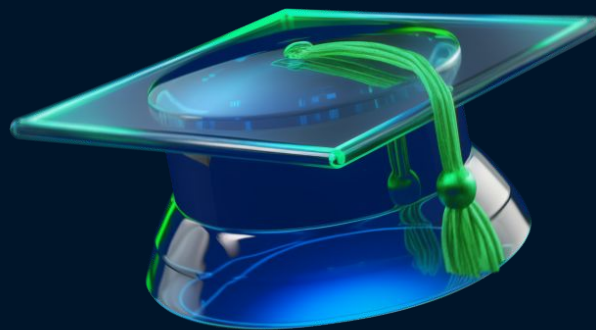

Connecting Styles

Inline CSS

```
<p style="color: blue;">This is a paragraph.</p>
```

Internal CSS


```
<head>
  <style type = text/css>
    body {background-color: blue;}
    p { color: yellow;}
  </style>
</head>
```

External CSS

```
<head>
  <link rel="stylesheet" type="text/css" href="style.css">
</head>
```

- inline styles
- embedded (tag <style> in head)
- linked (tag <link>)
One stylesheet for all pages.


Lesson 2

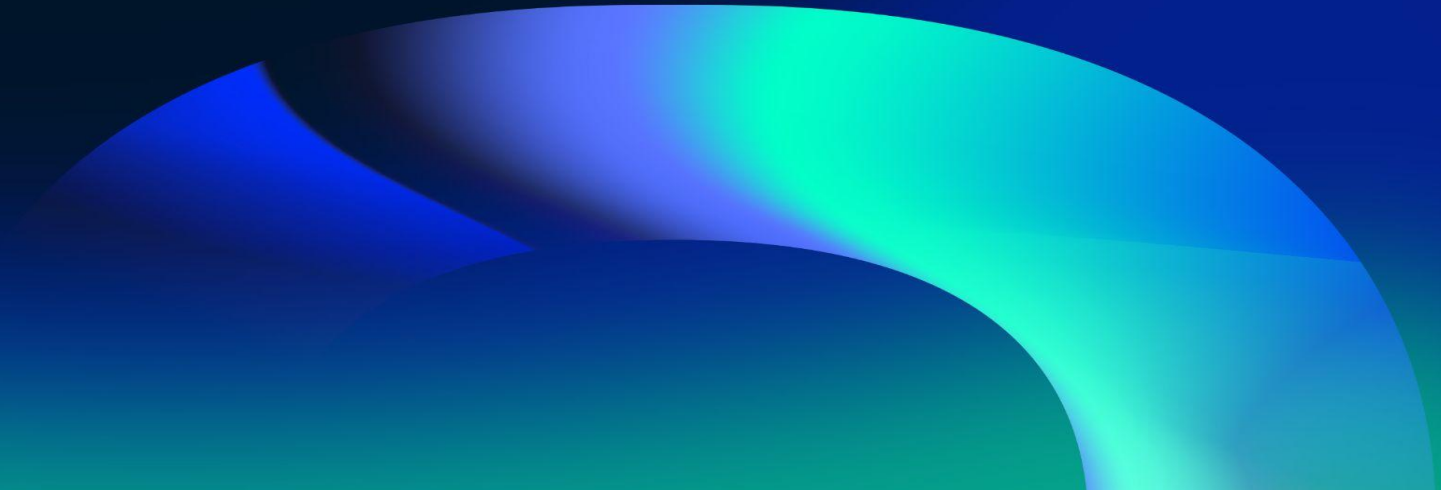

viewport

– is the visible area of the browser window, which varies depending on the device:

- Smartphone
- Tablet
- Computer

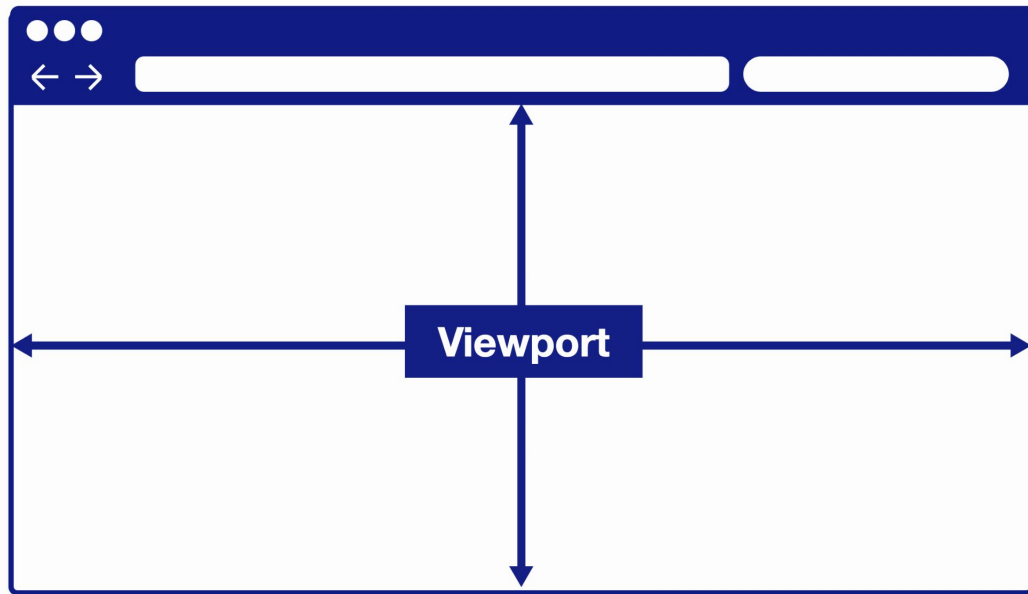

viewport units:

vh / vw

(% of viewport height/width)

Absolute

Units


– fixed physical unit (1/96th of an inch (0.25mm))

px

`width: 100px;`
`height: 100px;`

`margin: 20px;`
`padding: 20px;`

`font-size: 15px;`

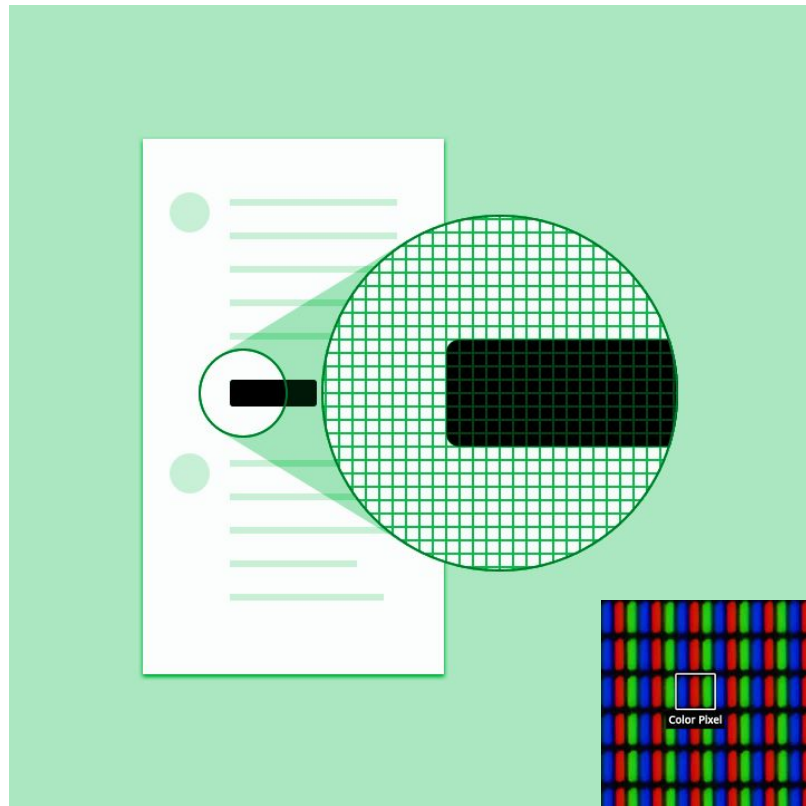

Absolute

Units


– fixed physical unit (1/96th of an inch (0.25mm))

px

`width: 100px;`
`height: 100px;`

`margin: 20px;`
`padding: 20px;`



`font-size: 15px;`

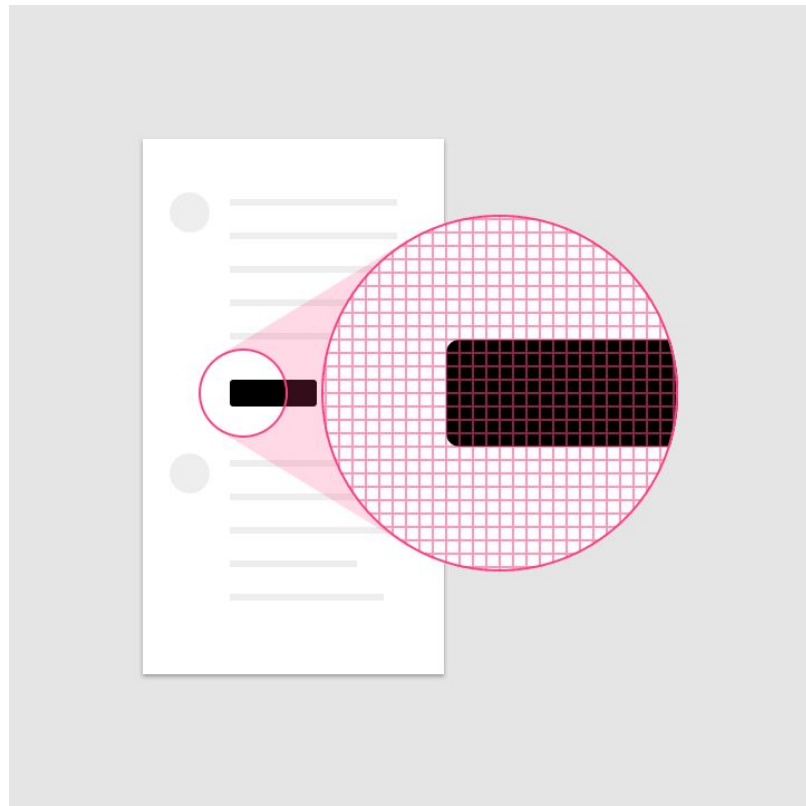

Relative

Units

- **em** (from parent) / **rem** (from html tag)
 - **font-size: 1.5rem;**
 - **font-size: 1.2em;**
 - **margin: 0.5rem;**
 - **padding: 0.8em;**
- **%** (relative to parent element's property)
 - width: 50%;**
 - height: 75%;**
 - margin: 10%;**
 - padding: 5%;**

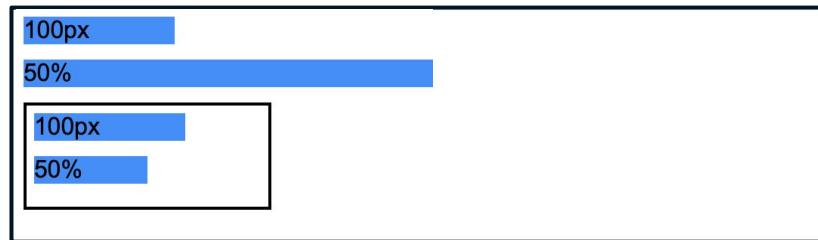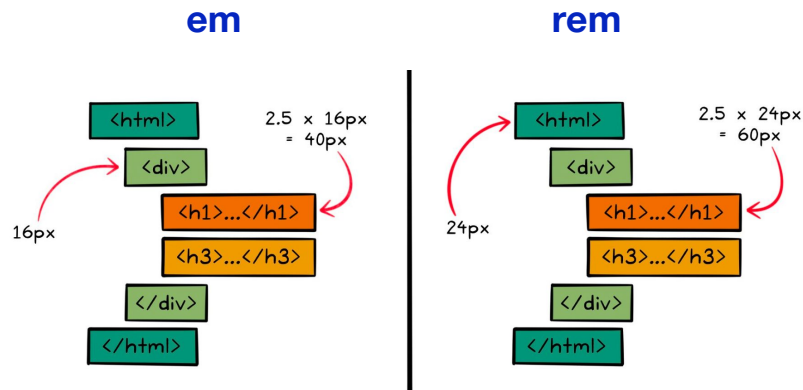




Colors in CSS

- hex / hexa
- rgb / rgba
- color keywords
- currentcolor
- transparent

Properties:

- color
- background-color
- text-shadow
- text-decoration-color
- border-color
- box-shadow
- outline

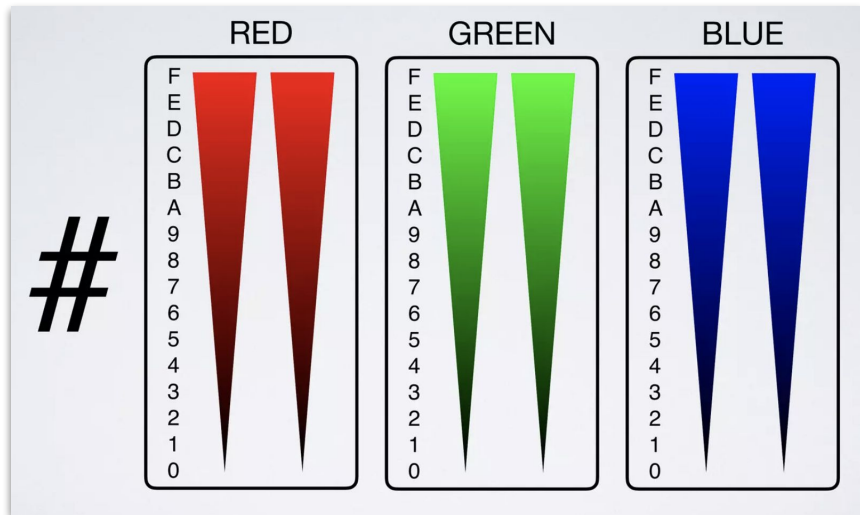

Color

HEX/HEXA

```
p {color: #FFAA00;}
```

```
p {color: #FA0;}
```

```
p {color: #FFAA0000;} <- full transparency
```

```
p {color: #FFAA00FF;} <- full opacity
```

consists of:

- digits from **0** to **9**
- letters from **A** to **F**
 - **0** – black color
 - **F** – full color
- hexadecimal system

Color


RGB/RGBA

```
p {color: rgb(0, 0, 0);}  
p {color: rgb(100%, 100%, 100%);}  
p {color: rgba(50%, 10%, 60%, 1);}  
p {color: rgba(31, 250, 118, 0);}
```

consists of:

- digits from **0 (black)** to **255 (white)**
or
- from **0% (black)** to **100% (white)**
- transparency from **0 (transparent)**
to **1 (fully opacity)**

RGB

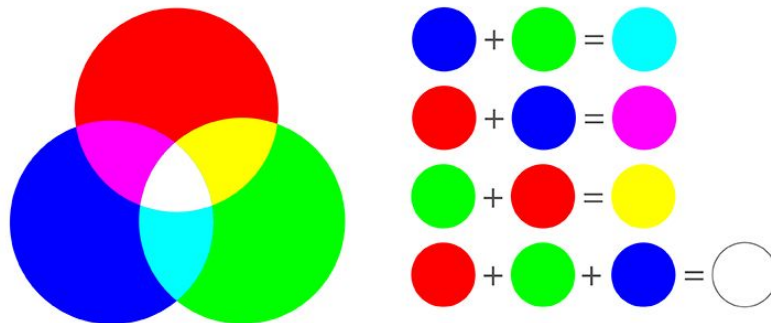

New Notation:

```
p { color: rgb(100% 100% 100%); }  
p { color: rgb(255 255 255 / .5); }  
p { color: rgb(0 0 0 / 50%); }
```

- no commas
- alpha channel is separated by a slash – /
- alpha channel can be in %
- not supported by older browsers

Color	Name	Hex	RGB
	aqua	#00FFFF	0, 255, 255
	black	#000000	0, 0, 0
	blue	#0000FF	0, 0, 255
	fuchsia	#FF00FF	255, 0, 255
	gray	#808080	128, 128, 128
	green	#008000	0, 128, 0
	lime	#00FF00	0, 255, 0
	maroon	#800000	128, 0, 0
	navy	#000080	0, 0, 128
	olive	#808000	128, 128, 0
	purple	#800080	128, 0, 128
	red	#FF0000	255, 0, 0
	silver	#C0C0C0	192, 192, 192
	teal	#008080	0, 128, 128
	white	#FFFFFF	255, 255, 255
	yellow	#FFFF00	255, 255, 0

Color

Keywords

white	gainsboro	silver	darkgray	gray	dimgray	black
whitesmoke	lightgray	lightcoral	rosybrown	indianred	red	maroon
snow	mistyrose	salmon	orangered	chocolate	brown	darkred
seashell	peachpuff	tomato	darkorange	peru	firebrick	olive
linen	bisque	darksalmon	orange	goldenrod	sienna	darkolivegreen
oldlace	antiquewhite	coral	gold	limegreen	saddlebrown	darkgreen
floralwhite	navajowhite	lightsalmon	darkkhaki	lime	darkgoldenrod	green
cornsilk	blanchedalmond	sandybrown	yellow	mediumseagreen	olivedrab	forestgreen
ivory	papayawhip	burlywood	yellowgreen	springgreen	seagreen	darkslategray
beige	moccasin	tan	chartreuse	mediumspringgreen	lightseagreen	teal
lightyellow	wheat	khaki	lawngreen	aqua	darkturquoise	darkcyan
lightgoldenrodyellow	lemonchiffon	greenyellow	darkseagreen	cyan	deepskyblue	mediumslateblue
honeydew	palegoldenrod	lightgreen	mediumaquamarine	cadetblue	steelblue	darkblue
mintcream	palegreen	skyblue	turquoise	dodgerblue	blue	darkblue
azure	aquamarine	lightskyblue	mediumturquoise	lightslategray	blueviolet	mediumslateblue
lightcyan	paleturquoise	lightsteelblue	cornflowerblue	slategray	darkorchid	darkslateblue
aliceblue	powderblue	thistle	mediumslateblue	royalblue	fuchsia	purple
ghostwhite	lightblue	plum	mediumpurple	slateblue	magenta	darkviolet
lavender	pink	violet	orchid	mediumorchid	mediumvioletred	purple
lavenderblush	lightpink	hotpink	palevioletred	deeppink	crimson	darkmagenta

Keyword

currentColor

– Inherits the **color** value from the element or parent.

```
div {  
  color: red;  
  border: 5px solid currentColor;  
}
```

The border color will be red.

```
div {  
  color: red;  
  border: 5px solid currentColor;  
  color: yellow;  
}
```

The border color will be yellow because of the cascade rule.

```
div {  
  color: green;  
}  
div p {  
  border: 5px solid currentColor;  
}
```

The border color will be green because the color is defined by the parent.



Useful for making the color of a vector icon match the text color.

Keyword

transparent

– Fully transparent.

```
div {  
  color: transparent;  
  border: 5px solid transparent;  
}
```

The text will take up space on the page but will not be visible. Its outline will also not be visible.

Other ways to set a fully transparent color:

```
color: rgba(0, 255, 0, 0);  
color: #FFFFFF00;
```


opacity: 0; – the entire element will be transparent

Working with


Text

- ***font-style***
- font-weight
- **font-size**
- **line-height**
- **font-family**
- **color**

```
body {  
  font-style: italic;  
  font-variant: small-caps;  
  font-weight: bold;  
  font-size: 16px;  
  line-height: 1.2em;  
  font-family: Arial, Helvetica, sans-serif;  
}
```

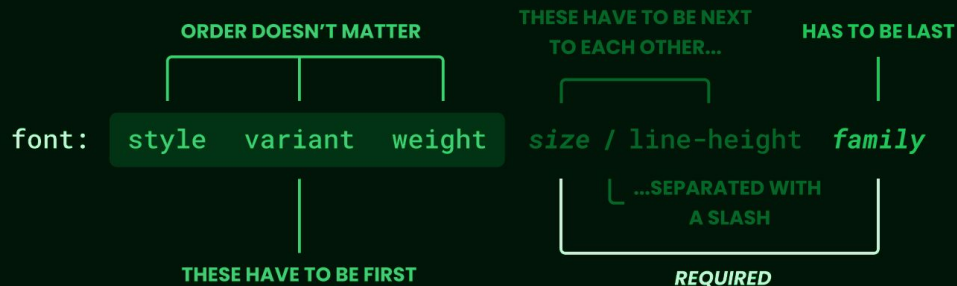

CSSOM

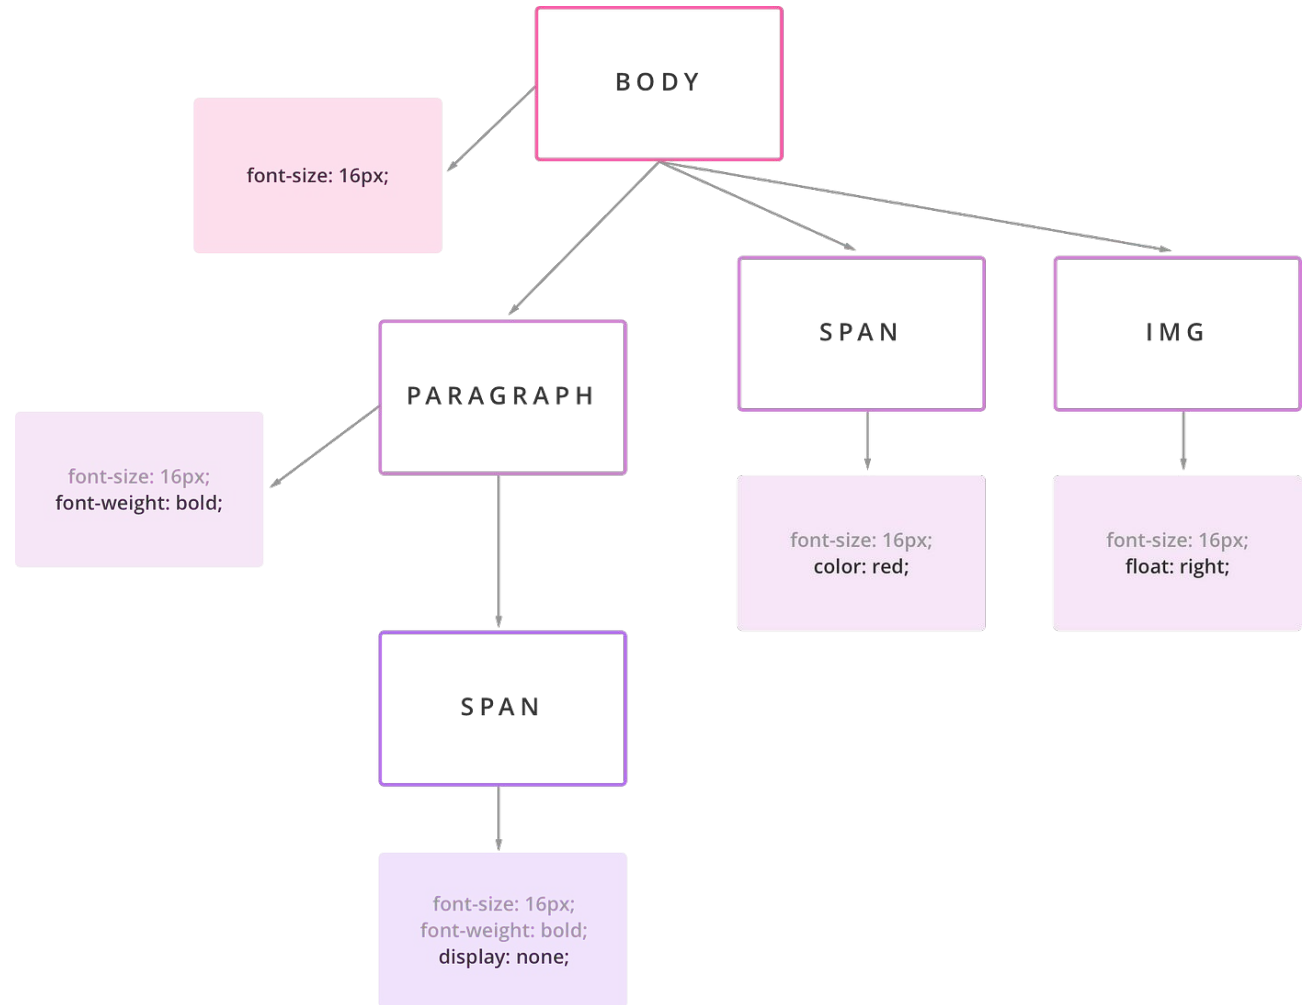

CSS

font-family

font family =

- A font from the design
- A web-safe font
- Font type

This ensures the text looks as similar to the layout as possible, even if the preferred font isn't loaded.

```
font-family: 'PT Sans',  
Arial, sans-serif;
```

Types of fonts:

- **Serif** – Fonts with small lines at the end of characters
- **Sans-serif** - Fonts without those lines
- *Cursive* – Handwriting-like fonts, often with connected letters
- **Monospace** - Fonts where all characters have the same width
- **Fantasy** – Decorative fonts

Web-safe

Fonts

Sans-serif

- Arial
- Verdana
- Tahoma
- Trebuchet MS

Serif

- Times New Roman
- Georgia
- Garamond

- Courier New (**monospace**)
- Brush Script MT (**cursive**)

```
font-family: "Inter", Arial, sans-serif;
```

```
font-family: "Playfair Display", Georgia, serif;
```


Connecting a Font

1. Open fonts.google.com
2. **Search** for the desired font
3. Choose the desired styles
4. In the side panel, select the **"link"** option
5. Copy the **code and paste** it into the `<head>` tag in the HTML
6. Set the font for the page in the **CSS file**

2

Inter

Sentence Type something

Categories Language Number of styles Show only variable fonts Show only color fonts

21 of 1562 families

Inter Rasmus Andersson 2.1 Variable (2 axes)

Whereas recognition of the inherent dignity

Akatar SIL Inter

4

Use on the web

To embed a font, copy the code into the `<head>` of your html

☒ `<link>` ☐ `@import`

```
<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
<link href="https://fonts.googleapis.com/css2?family=Inter:wght@300;500&display=swap" rel="stylesheet">
```

5

CSS rules to specify families

```
font-family: 'Inter', sans-serif;
```

6

Light 300 Remove Light 300

Whereas recognition of the inherent dignity

Regular 400 Select Regular 400

Medium 500 Remove Medium 500

Whereas recognition of the inherent dignity

3

CSS

custom properties

```
.button {  
  background: #00f957;  
}  
  
.card-title {  
  color: #00f957;  
}  
  
.link:hover {  
  border-color: #00f957;  
}
```

```
:root {  
  --color-green: #00f957;  
}  
  
div {  
  color: var(--color-green);  
}  
  
p {  
  background-color: var(--color-green);  
}
```

- ✗ hard to maintain
- ✗ duplicate values
- ✗ impossible themes

- ✓ reusable
- ✓ scalable
- ✓ easy themin

CSS

custom properties

– for reused values

- colors
- spacing
- fonts
- radius
- shadows
- transitions

```
:root {  
  --color-green: #00f957;  
  --font-main: "Inter", Arial, sans-serif;  
  --space-md: 24px;  
}
```

```
div {  
  color: var(--green);  
}  
p {  
  font-family: var(--font-main);  
}
```

CSS Nesting

- ❶ Only 1 level deep without &
- ❷ No nested @media or @keyframes like SCSS
- ❸ Lacks logic (no @if, @each, etc.)

```
.card {  
  + .text {}  
  
  &.link {}  
  
  .section & {}  
  
  .title {  
    color: red;  
  }  
}
```

Styles in Figma

font-weight

font-family

font-size

letter-spacing

line-height

color

color opacity

2022

s collect are represented with NFTs on Ethereum's blockchain with real-world
asilisks they have gathered to battle other players to win ether (ETH).
ayers are immersed in a 3D open world to explore and capture dragon-like
Balthazar Dragons is an upcoming fantasy role-playing game developed on
n by a decentralized autonomous organization (DAO) called the Balthazar

Our blog

Fill

F8F7FF 100 %

Styles in Figma

"I'm incredibly pleased with the service provided by UrbanNest. Their professionalism and dedication were evident throughout the process, ultimately leading me to my dream home. I highly recommend their services to anyone seeking a seamless real estate experience."

501 Fill × 180 Hug


Cody Fisher
Manager at Surya Company

Typography

Name	Body/Lg
Font	Poppins
Weight	400
Style	Regular
Size	20px
Line height	150%
Letter spacing	0%
Horizontal align...	Center

Colors

Hex ▾

 Text/textColorPrimary

#1A1A1A

font-family

font-weight

font-style



font-size

line-height

letter-spacing

variable name

color

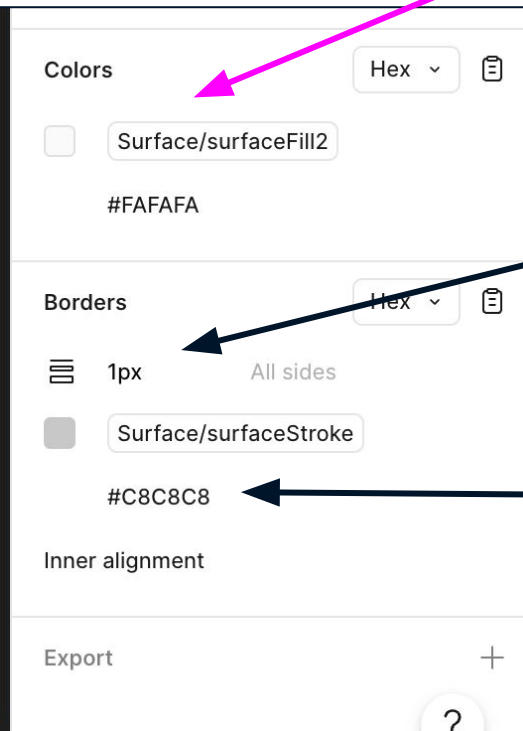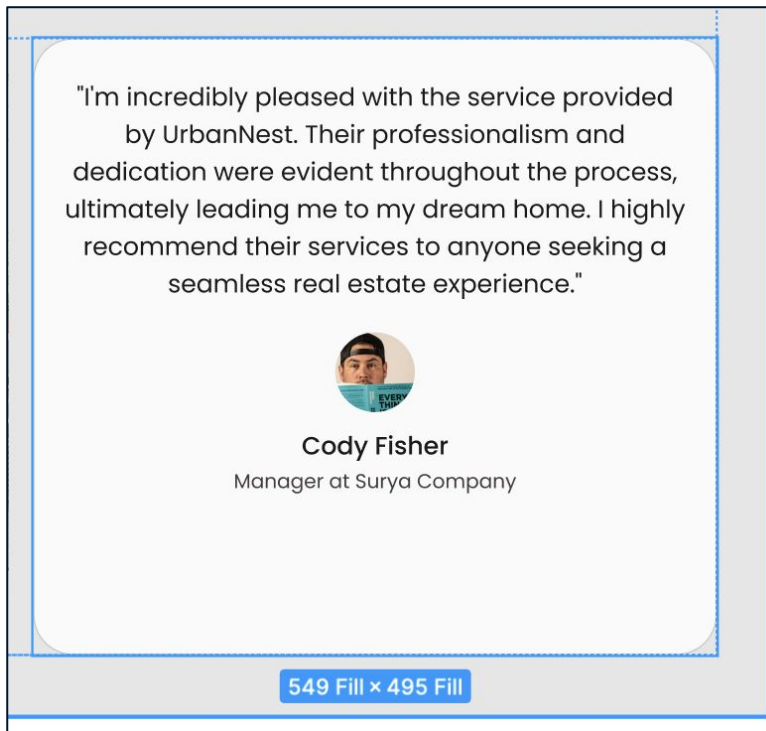

background-color

border width

border color

professional integrity.

"I'm incredibly pleased with the service provided by UrbanNest. Their professionalism and dedication were evident throughout the process, ultimately leading me to my dream home. I highly recommend their services to anyone seeking a seamless real estate experience."





Cody Fisher
Manager at Surya Company

549 Fill × 495 Fill

Flow	Vertical
Width	Fill (549px)
Height	Fill (495px)
Radius	32px
Border	1px
Padding	
Top	32px
Right	24px
Bottom	32px
Left	24px
Gap	24px

border-radius

The Perfect Plan for Creative

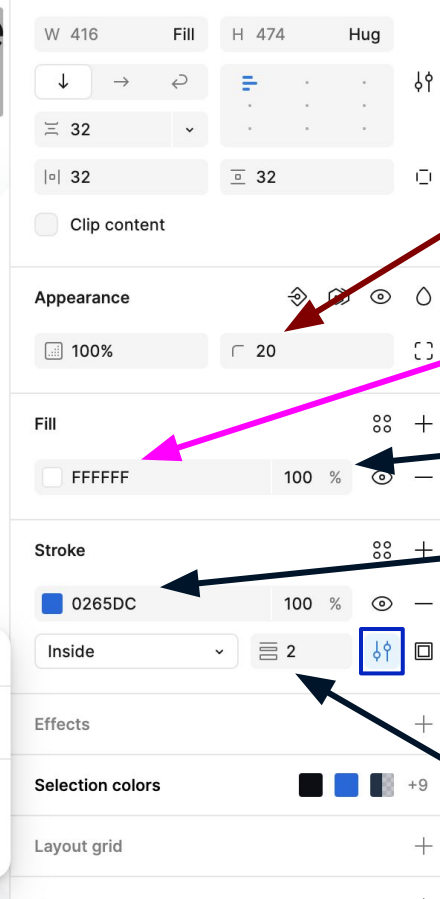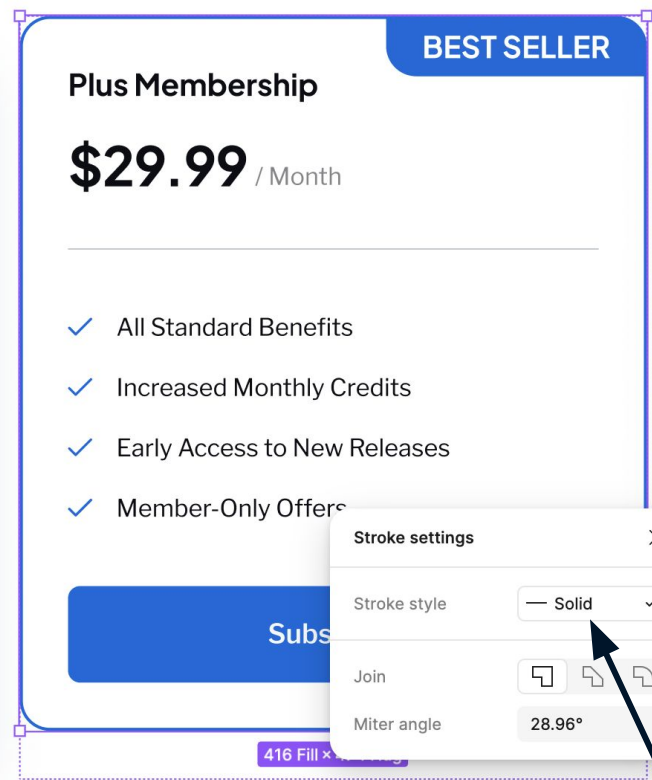

border-radius

background-color

background-color opacity


border color

border width

border style

or Use Figma Dev mode

1. 15€ per month
2. You can copy and paste CSS code from Figma

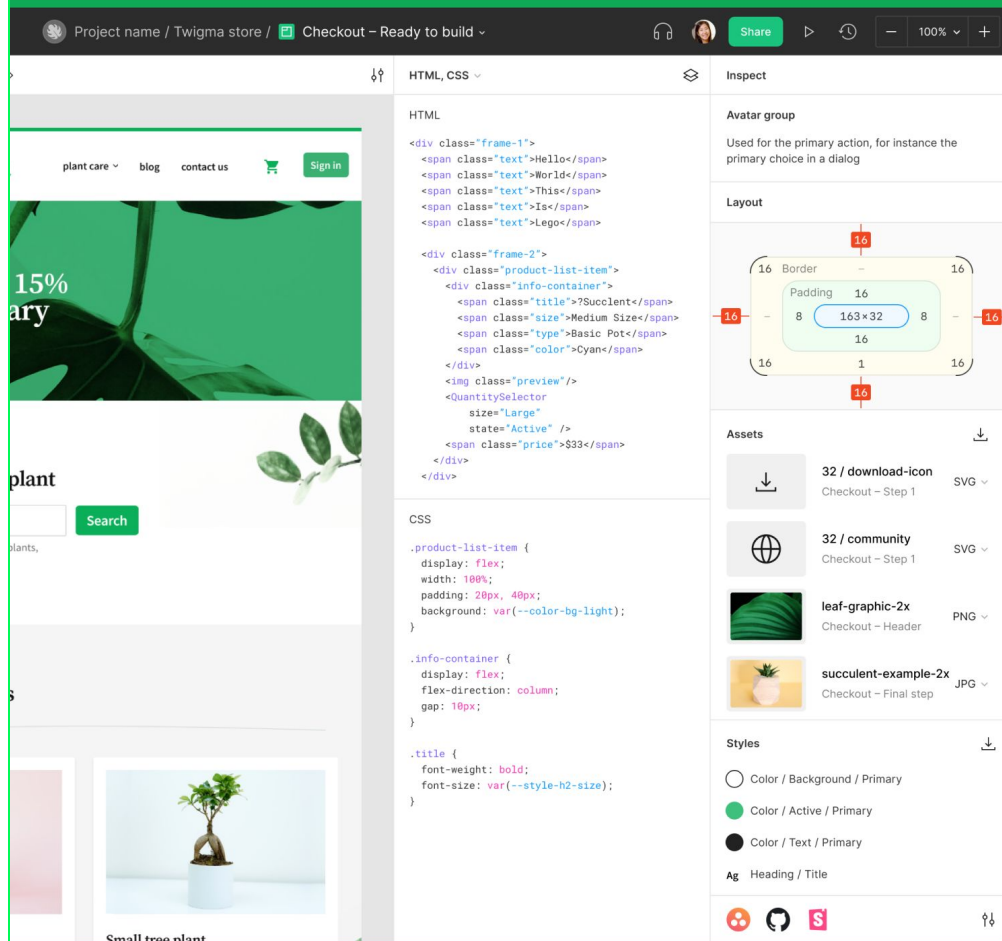


Vendor Prefixes

— Special prefixes added to CSS properties to allow developers to use experimental or new CSS properties before they become standard and are supported by all browsers.

WebKit 

(Safari, old versions of Chrome)

Mozilla Firefox 

Opera 

Internet Explorer и Microsoft Edge 


(old versions)

```
background-clip: text;  
-webkit-background-clip: text;  
-webkit-text-fill-color: transparent;
```

Use Autoprefixer [Autoprefixer](#).


Summary

1. CSS syntax
2. What selectors are
3. The order in which styles are applied
4. How to link styles to a page
5. Units of measurement and colors used in CSS
6. How to link fonts

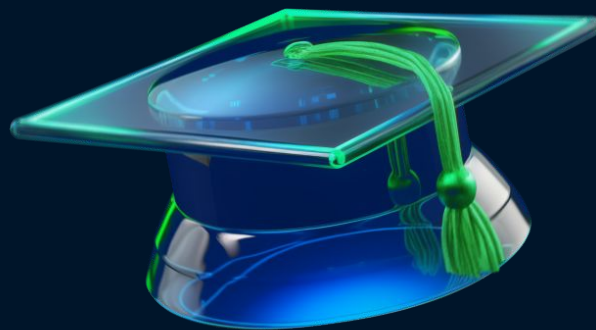

Homework

1. Complete one of the courses to reinforce the theory.
2. Connect `normalize.css` to Binabox project as a separate file.
3. Add a font using Google Fonts.
4. Write basic styles for the marked-up blocks of the layout using Emmet right away:
 - font size / Line height / Font type / Font weight - font-*
 - Text color
 - Background color

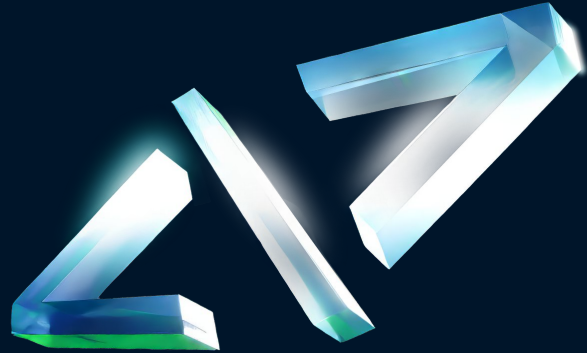

Quality Criteria for HTML Course

❤️ Mandatory for passing the course

💛 Required for the highest grade

💚 Optional

❤️ Single CSS File.

❤️ All fonts used in the design are connected to the pages.

❤️ Provide fallback fonts and family types at the end of the font list.

❤️ Do not use !important in CSS.

❤️ Do not use #id for styling.

❤️ Use consistent units for element sizes and positioning.

💛 Avoid nesting selectors more than two levels deep.

💛 Avoid styling tags directly

💛 Colors should be in a consistent format (hex or rgba).

B Academy
RO



QUESTIONS?



THANK YOU!

Have a good evening!

Please fill out the feedback form
It's very important for us

