

## Guide to using the ecoengine R package

The Berkeley Ecoengine (<http://ecoengine.berkeley.edu>) provides an open API to a wealth of museum data contained in the Berkeley natural history museums. This R package provides a programmatic interface to this rich repository of data allowing for the data to be readily analyzed and visualized in a variety of contexts. This vignette provides a brief overview of the package's capabilities.

The API documentation is available at <http://ecoengine.berkeley.edu/developers/>. As with most APIs all requests return a call that displays all the data endpoints accessible to users. Ecoengine has something similar.

```
library(ecoengine)
ee_about()
```

```
## Loading required package: rjson
```

type	endpoint
meta-data	<a href="http://ecoengine.berkeley.edu/api/sources/">http://ecoengine.berkeley.edu/api/sources/</a>
meta-data	<a href="http://ecoengine.berkeley.edu/api/footprints/">http://ecoengine.berkeley.edu/api/footprints/</a>
data	<a href="http://ecoengine.berkeley.edu/api/checklists/">http://ecoengine.berkeley.edu/api/checklists/</a>
data	<a href="http://ecoengine.berkeley.edu/api/sensors/">http://ecoengine.berkeley.edu/api/sensors/</a>
data	<a href="http://ecoengine.berkeley.edu/api/vtmveg/">http://ecoengine.berkeley.edu/api/vtmveg/</a>
data	<a href="http://ecoengine.berkeley.edu/api/observations/">http://ecoengine.berkeley.edu/api/observations/</a>
data	<a href="http://ecoengine.berkeley.edu/api/photos/">http://ecoengine.berkeley.edu/api/photos/</a>
actions	<a href="http://ecoengine.berkeley.edu/api/search/">http://ecoengine.berkeley.edu/api/search/</a>

### The ecoengine class

Most functions in the ecoengine package will return a S3 object of class **ecoengine**. The class contains 4 items.

- A total result count (not necessarily the results in this particular object)
- The call (So a reader can replicate the results)
- The type (photos, observation, checklist, or sensor)
- The data. Data are most often coerced into a **data.frame**. To access the data simply use `result_object$data`.

### Notes on downloading large data requests

For the sake of speed, results are paginated at 25 results per page. It's possible to request all pages for any query by specifying `page = all` in any search. However, this should be used if the request is reasonably sized (1,000 or fewer records). With larger requests, there is a chance that the query might become interrupted and you could lose all the partially downloaded data. Instead, use the returned observations to split the

request. You can always check the number of requests you'll need to retrieve data for any query by running `ee_pages(obj)` where `obj` is an object of class `ecoengine`.

```
request <- ee_photos(county = "Santa Clara County")

##      |

## Search returned 754 photos (downloading page 1 of 31)

ee_pages(request)

## [1] 31

# Now it's simple to parallelize this request You can parallelize across
# number of cores by passing a vector of pages from 1 through total_pages.
```

## Specimen Observations

The database contains over 2 million records. Many of these have already been georeferenced. There are two ways to obtain observations. One is to query the database directly based on a partial or exact taxonomic match. For example

```
pinus_observations <- ee_observations(scientific_name_exact = "Pinus", page = 1)

## Retrieving 1 pages (total: 25 records)

##      |

pinus_observations

## [Type]: observations
## [Number of results]: 25
## [Call]: http://ecoengine.berkeley.edu/api/observations/?country=United+States&page=2&scientific_name=Pinus
## [Output dataset]: 25 rows
```

For additional fields upon which to query, simply look through the help for `?ee_observations`. In addition to narrowing data by taxonomic group, it's also possible to add a bounding box (add argument `bbox`) or request only data that have been georeferenced (set `georeferenced = TRUE`).

---

## Photos

```
photos <- ee_photos_get(quiet = TRUE)
photos

## [Type]: photos
## [Number of results]: 43708
## [Call]: http://ecoengine.berkeley.edu/api/photos/?page=2&page_size=25&format=json
## [Output dataset]: 25 rows
```

The database currently holds photos. Photos can be searched by state province, county, genus, scientific name, authors along with date bounds. For additional options see `?ee_photos_get`.

## Searching photos by author

```
charles_results <- ee_photos(author = "Charles Webber")

## |

## Search returned 4012 photos (downloading page 1 of 161)

charles_results

## [Type]: photos
## [Number of results]: 4012
## [Call]: http://ecoengine.berkeley.edu/api/photos/?format=json&page=2&page_size=25&authors=Charles+W
## [Output dataset]: 25 rows

# Let's examine a couple of rows of the data
charles_results$data[1:2, ]

##          authors          locality          county
## 1 Charles Webber  Yosemite National Park, Badger Pass Mariposa County
## 2 Charles Webber Yosemite National Park, Yosemite Falls Mariposa County
##   photog_notes
## 1      Tan Oak
## 2      <NA>
##
##                                     url
## 1 http://ecoengine.berkeley.edu/api/photos/CalPhotos%3A8076%2B3101%2B2933%2B0025/
## 2 http://ecoengine.berkeley.edu/api/photos/CalPhotos%3A8076%2B3101%2B0667%2B0107/
##   begin_date   end_date          record
## 1 1954-10-01 1954-10-01 CalPhotos:8076+3101+2933+0025
## 2 1948-06-01 1948-06-01 CalPhotos:8076+3101+0667+0107
##
##                                     remote_resource
## 1 http://calphotos.berkeley.edu/cgi/img_query?seq_num=21272&one=T
## 2 http://calphotos.berkeley.edu/cgi/img_query?seq_num=14468&one=T
##   collection_code observations.scientific_name
## 1      CalAcademy      Lithocarpus densiflorus
## 2      CalAcademy      Rhododendron occidentale
##
##                                     observations.url
## 1 http://ecoengine.berkeley.edu/api/observations/CalPhotos%3A8076%2B3101%2B2933%2B0025%3A1/
## 2 http://ecoengine.berkeley.edu/api/observations/CalPhotos%3A8076%2B3101%2B0667%2B0107%3A1/
##
##                                     media_url
## 1 http://calphotos.berkeley.edu/imgs/512x768/8076_3101/2933/0025.jpeg
## 2 http://calphotos.berkeley.edu/imgs/512x768/8076_3101/0667/0107.jpeg
##
##                                     source geojson.type
## 1 http://ecoengine.berkeley.edu/api/sources/9/      <NA>
## 2 http://ecoengine.berkeley.edu/api/sources/9/      <NA>
##   geojson.coordinates1 geojson.coordinates2
## 1      <NA>      <NA>
## 2      <NA>      <NA>
```

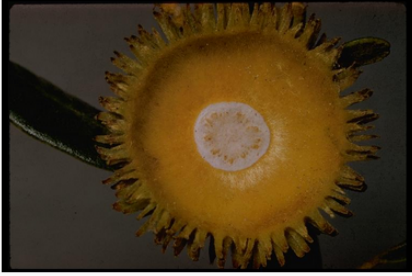

---

## Browsing these photos

```
view_photos(charles_results)
```

This will launch your default browser and render a page with thumbnails of all images returned by the search query.

### Ecoengine Photo Viewer

Photo	Authors	Locality / County	Notes	Start Date
	Charles Webber	Yosemite National Park, Badger Pass, Mariposa County	Tan Oak	1954-10-01
	Charles Webber	Yosemite National Park, Yosemite Falls, Mariposa County	NA	1948-06-01

---

## Species checklists

There is a wealth of checklists from all the source locations. To get all available checklists from the engine, run:

```
all_lists <- ee_checklists()

## Returning 57 checklists

head(all_lists[, c("footprint", "subject")])

##                               footprint
## 1 http://ecoengine.berkeley.edu/api/footprints/angelo-reserve/
## 2 http://ecoengine.berkeley.edu/api/footprints/angelo-reserve/
## 3 http://ecoengine.berkeley.edu/api/footprints/angelo-reserve/
## 4 http://ecoengine.berkeley.edu/api/footprints/hastings-reserve/
## 5 http://ecoengine.berkeley.edu/api/footprints/angelo-reserve/
## 6 http://ecoengine.berkeley.edu/api/footprints/hastings-reserve/
##      subject
```

```
## 1    Mammals
## 2     Mosses
## 3    Beetles
## 4    Spiders
## 5 Amphibians
## 6     Ants
```

Currently there are 57 lists available. We can drill deeper into any list to get all the available data. We can also narrow our checklist search to groups of interest (see `unique(all_lists$subject)`). For example, to get the list of Spiders:

```
spiders <- ee_checklists(subject = "Spiders")

## Returning 2 checklists

spiders

##           record
## 4  bigcb:specieslist:15
## 10 bigcb:specieslist:20
##                                     footprint
## 4  http://ecoengine.berkeley.edu/api/footprints/hastings-reserve/
## 10  http://ecoengine.berkeley.edu/api/footprints/angelo-reserve/
##                                     url
## 4  http://ecoengine.berkeley.edu/api/checklists/bigcb%3Aspecieslist%3A15/
## 10 http://ecoengine.berkeley.edu/api/checklists/bigcb%3Aspecieslist%3A20/
##                                     source subject
## 4  http://ecoengine.berkeley.edu/api/sources/18/ Spiders
## 10 http://ecoengine.berkeley.edu/api/sources/18/ Spiders
```

Now we can drill deep into each list. For this tutorial I'll just retrieve data from the the two lists returned above.

```
library(plyr)
spider_details <- ldply(spiders$url, checklist_details)
names(spider_details)

## [1] "url" "observation_type"
## [3] "scientific_name" "collection_code"
## [5] "institution_code" "country"
## [7] "state_province" "county"
## [9] "locality" "coordinate_uncertainty_in_meters"
## [11] "begin_date" "end_date"
## [13] "kingdom" "phylum"
## [15] "class" "order"
## [17] "family" "genus"
## [19] "specific_epithet" "infraspecific_epithet"
## [21] "source" "remote_resource"
## [23] "earliest_period_or_lowest_system" "latest_period_or_highest_system"

unique(spider_details$scientific_name)
```

## [1] "holocnemus pluchei"	"oecobius navus"
## [3] "uloborus diversus"	"neriene litigiosa"
## [5] "theridion sp. A"	"tidarren sp."
## [7] "dictyna sp. A"	"dictyna sp. B"
## [9] "mallos sp."	"yorima sp."
## [11] "hahnna sanjuanensis"	"cybaeus sp."
## [13] "zanomys sp."	"anachemmis sp."
## [15] "titiotus sp."	"oxyopes scalaris"
## [17] "zora hespera"	"drassinella sp."
## [19] "phrurotimpus mateonus"	"scotinella sp."
## [21] "castianeira luctifera"	"meriola californica"
## [23] "drassyllus insularis"	"herpyllus propinquus"
## [25] "micaria utahna"	"trachyzelotes lyonneti"
## [27] "ebo evansae"	"habronattus oregonensis"
## [29] "metaphidippus sp."	"platycryptus californicus"
## [31] "calymmaria sp."	"frontinella communis"
## [33] "undetermined sp."	"latrodectus hesperus"
## [35] "theridion sp. B"	"agelenopsis oregonensis"
## [37] "pardosa spp."	"schizocosa mccooki"
## [39] "hololena sp."	"callobius sp."
## [41] "pimus sp."	"aliatypus sp."
## [43] "antrodiaetus sp."	"antrodiaetus riversi"
## [45] "anyphaena californica"	"aculepeira packardi"
## [47] "araneus bispinosus"	"araniella displicata"
## [49] "cyclosa conica"	"cyclosa turbinata"
## [51] "brommella sp."	"cicurina sp."
## [53] "dictyna sp."	"emblyna oregona"
## [55] "orodrassus sp."	"sergiolus sp."
## [57] "erigone sp."	"pityohyphantes sp."
## [59] "tachygyna sp."	"alopecosa kochi"
## [61] "oxyopes salticus"	"philodromus sp."
## [63] "tibellus oblongus"	"pimosa sp."
## [65] "undetermined spp."	"metaphidippus manni"
## [67] "thiodina sp."	"diaea livens"
## [69] "metellina sp."	"cobanus cambridgei"
## [71] "tetragnatha sp."	"tetragnatha versicolor"
## [73] "dipoena sp."	"theridion spp."
## [75] "misumena vatia"	"misumenops sp."
## [77] "tmarus angulatus"	"xysticus sp."
## [79] "hyptiotes gertschi"	"mexigonus morosus"

Our resulting dataset now contains 80 unique spider species.

## Sensors

Some notes on the sensors.

You'll need a sensor's id to query the data for that particular metric and location. The `ee_list_sensors()` function will give you a condensed list with the location, metric, binning method and most importantly the `sensor_id`. You'll need this id for the data retrieval.

```
head(ee_list_sensors())
```

station_name	units
Angelo HQ WS	Kilojoules per square meter
Angelo Meadow WS	Watts per square meter
Angelo HQ SF Eel Gage	Percent
Angelo HQ WS	Degree
Cahto Peak WS	Meters per second
Angelo Meadow WS	Meters per second

Table 2: List of stations (continued below)

variable	method_name	record
Solar radiation total kj/m <sup>2</sup>	Conversion to 30-minute timesteps	1625
Solar radiation total w/m <sup>2</sup>	Conversion to 30-minute timesteps	1632
Rel humidity perc	Conversion to 30-minute timesteps	1641
Wind direction degrees	Conversion to 30-minute timesteps	1644
Wind speed avg ms	Conversion to 30-minute timesteps	1651
Wind speed max ms	Conversion to 30-minute timesteps	1654

Let's download solar radiation for the Angelo reserve HQ (sensor\_id = 1625).

```
# First we can grab the list of sensor ids
sensor_ids <- ee_list_sensors()$record
# In this case we just need data for sensor with id 1625
angelo_hq <- sensor_ids[1]
results <- ee_sensor_data_get(angelo_hq, page = 2)

## Search returned 56779 observations (downloading page 2 of 2272)

results

## [Type]: sensor
## [Number of results]: 56779
## [Call]: http://ecoengine.berkeley.edu/api/sensors/1625/data/?page=2&format=json
## [Output dataset]: 25 rows
```

Notice that the query returned 56779 observations but has only retrieved the 25-50 since we requested records for page 2 (and each page by default retrieves 25 records). You can request page = "all" but remember that this will make 2271 requests. This could take a while and might make sense to parallelize the request or split the calls so as to avoid hammering the server all at once.

Now we can examine the data itself.

```
head(results$data)
```

```
##           local_date value data_quality_qualifierid
## 2  2010-01-06 02:00:00 -9999                      19
## 26 2010-01-06 02:30:00 -9999                      19
## 3   2010-01-06 03:00:00 -9999                      19
## 4   2010-01-06 03:30:00 -9999                      19
## 5   2010-01-06 04:00:00 -9999                      19
## 6   2010-01-06 04:30:00 -9999                      19
##           data_quality_qualifier_description data_quality_valid
## 2  Passed sanity check; see incident report IR_8          FALSE
## 26 Passed sanity check; see incident report IR_8          FALSE
## 3   Passed sanity check; see incident report IR_8          FALSE
## 4   Passed sanity check; see incident report IR_8          FALSE
## 5   Passed sanity check; see incident report IR_8          FALSE
## 6   Passed sanity check; see incident report IR_8          FALSE
```

We can also aggregate sensor data for any of the above mentioned sensors. We do this using the `ee_sensor_agg()` function. The function requires a sensor id and how the data should be binned. You can specify hours, minutes, seconds, days, weeks, month, and years. If for example you need the data binned every 15 days, simply add `days = 15` to the call. Once every 10 days and 2 hours would be `ee_sensor_agg(sensor_id = 1625, days = 10, hours = 2)`

```
stations <- ee_list_sensors()
# This gives you a list to choose from
sensor_df <- ee_sensor_agg(sensor_id = stations[1, c("record")], weeks = 2)
```

```
## |
```

```
## Retrieving page 1 (85 observations total)
```

```
sensor_df
```

```
## [Type]: sensor
## [Number of results]: 85
## [Call]: http://ecoengine.berkeley.edu/api/sensors/1625/aggregate/?interval=2W&page=2&page_size=25&f
## [Output dataset]: 25 rows
```

```
head(sensor_df$data)
```

```
##   begin_date  mean min   max   sum count
## 2  2010-01-17 18.94   0 150.8  7613   402
## 26 2010-01-31 17.03   0 237.7 11444   672
## 3   2010-02-14 29.54   0 336.3 19852   672
## 4   2010-02-28 42.08   0 402.5 28276   672
## 5   2010-03-14 59.12   0 466.6 39730   672
## 6   2010-03-28 93.55   0 490.6 62678   670
```

As with other functions, the results are paginated. So the full dataset can be retrieved by adding `page = all` to the query. If you think this might be unusually large, simply request the first page (default action) and look at the number of results. This divided by 25 (the number of observations per request) is how many API calls you will make. If this is less than 30, it will run very quickly. If this is over a 100, your best course of action would be to parallelize the request or split them up. Since we only need 85 records in this case:



```

sensor_df <- ee_sensor_agg(sensor_id = 1625, weeks = 2, page = "all")

## Retrieving 4 pages (total: 85 records)

##      |                                     |

sensor_df

## [Type]: sensor
## [Number of results]: 85
## [Call]: http://ecoengine.berkeley.edu/api/sensors/1625/aggregate/?interval=2W&page=2&page_size=25&f
## [Output dataset]: 85 rows

```

## Searching the engine

How to search the engine. Some notes on elastic search.

```

ee_search()
ee_search_obs_get()
ee_search()

```

## Miscellaneous functions

### Footprints

```

footprints <- ee_footprints()
footprints[, -3] # To keep the table from spilling over

```

---

id	name
12	Angelo Reserve
13	Sagehen Reserve
14	Hastings Reserve
15	Blue Oak Ranch Reserve

---

## Data sources

To obtain a list of data sources for the specimens contained in the museum.

```

source_list <- ee_sources()
unique(source_list$name)

```

---

name

---

---

LACM Vertebrate Collection  
MVZ Birds  
MVZ Herp Collection  
MVZ Mammals  
Wieslander Vegetation Map  
CAS Herpetology  
Consortium of California Herbaria  
UCMP Vertebrate Collection  
Sensor Data Qualifiers  
Essig Museum of Entymology

---

Please send any comments, questions, or ideas for new functionality or improvements to <[karthik.ram@berkeley.edu](mailto:karthik.ram@berkeley.edu)>. The code lives on GitHub [under the rOpenSci account](#). Pull requests and [bug reports](#) are most welcome.

Karthik Ram  
January, 2014  
*Berkeley, CA*