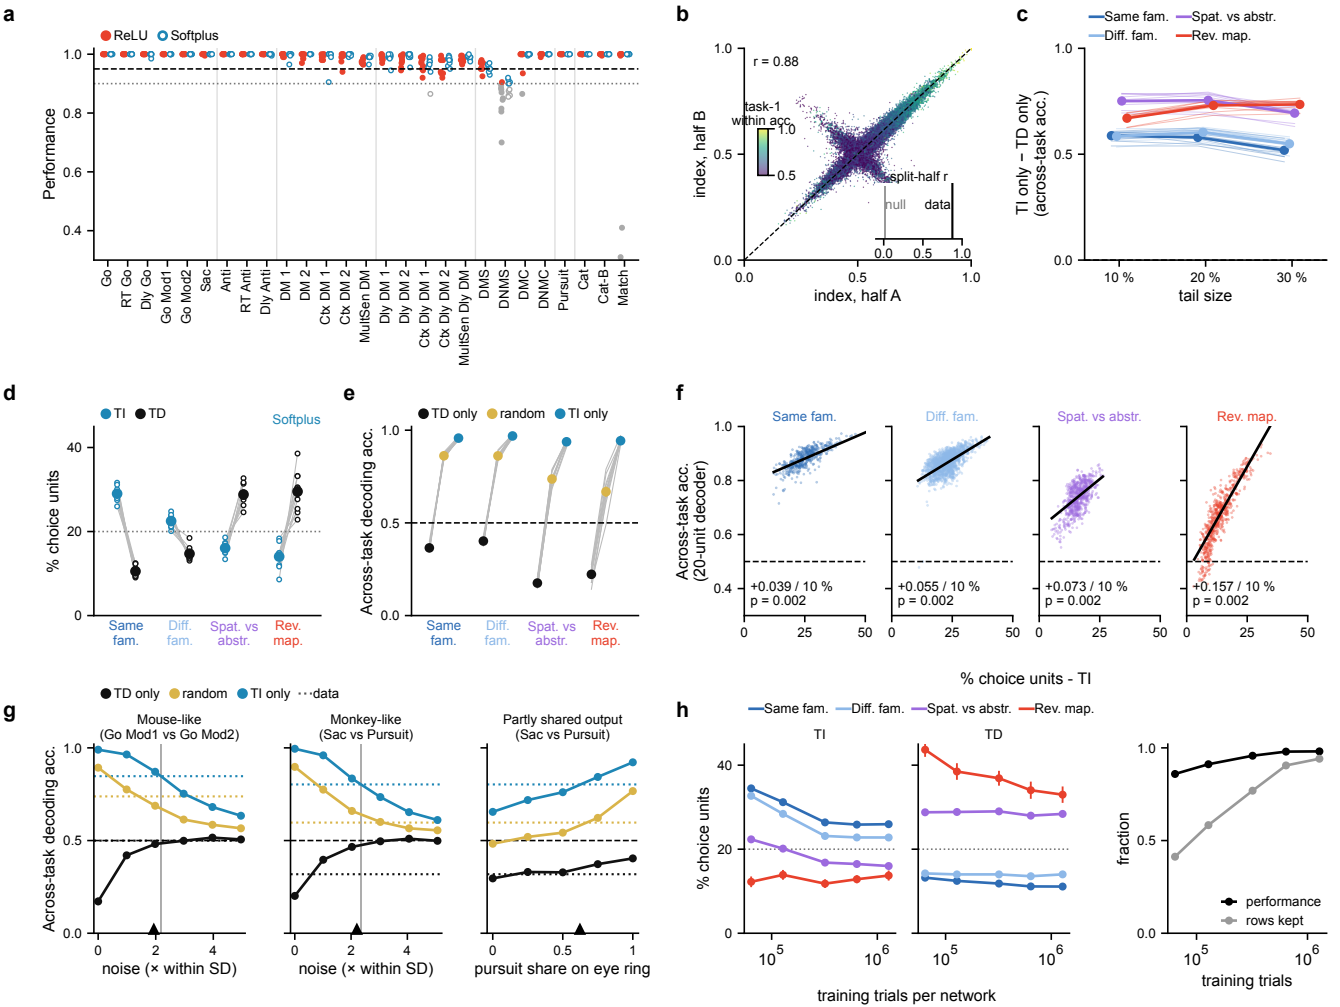

a
ReLU
Softplus
Performance
Go
RT Go
Dly Go
Go Mod1
Go Mod2
Sac
Anti
RT Anti
Dly Anti
DM 1
DM 2
Ctx DM 1
Ctx DM 2
MultSen DM
Dly DM 1
Dly DM 2
Ctx Dly DM 1
Ctx Dly DM 2
MultSen Dly DM
DMS
DNMS
DMC
DNMC
Pursuit
Cat
Cat-B
Match
b
r = 0.88
task-1 within acc.
split-half r
null
data
index, half B
index, half A
c
Same fam.
Diff. fam.
Spat. vs abstr.
Rev. map.
TI only – TD only (across-task acc.)
tail size
d
TI
TD
Softplus
% choice units
e
TD only
random
TI only
Across-task decoding acc.
f
Same fam.
Diff. fam.
Spat. vs abstr.
Rev. map.
Across-task acc. (20-unit decoder)
+0.039 / 10 %
p = 0.002
+0.055 / 10 %
p = 0.002
+0.073 / 10 %
p = 0.002
+0.157 / 10 %
p = 0.002
% choice units - TI
g
TD only
random
TI only
data
Mouse-like (Go Mod1 vs Go Mod2)
Monkey-like (Sac vs Pursuit)
Partly shared output (Sac vs Pursuit)
Across-task decoding acc.
noise (× within SD)
noise (× within SD)
pursuit share on eye ring
h
Same fam.
Diff. fam.
Spat. vs abstr.
Rev. map.
TI
TD
% choice units
training trials per network
fraction
performance
rows kept
training trials