
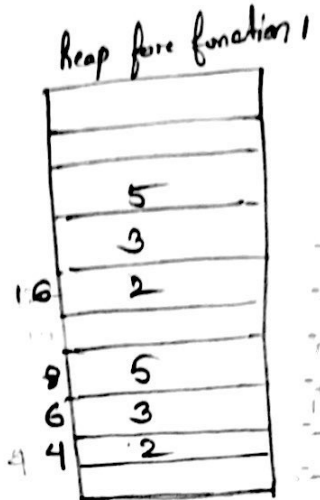


7. main.cpp

```
int main ( )
```

```
{ std::vector<int> vectore {2,3,5};  
  get-value-params (vectore);  
  return 0;
```

```
}
```

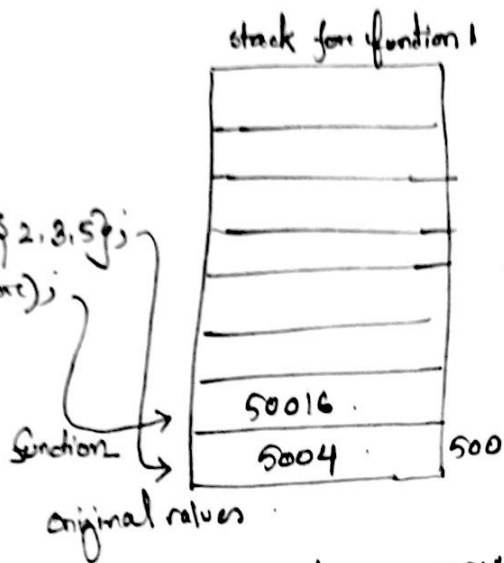



pass-by-value will create a copy of vectors.

8. main.cpp

```
int main ( )
```

```
{ std::vector<int> vectore {2,3,5};  
  get-ref-params (vectore);  
  return 0;
```

```
}
```

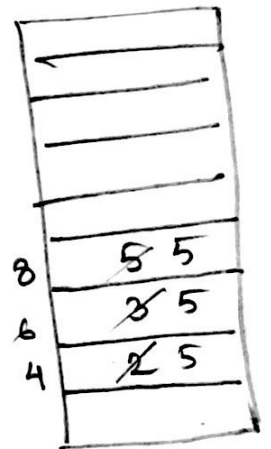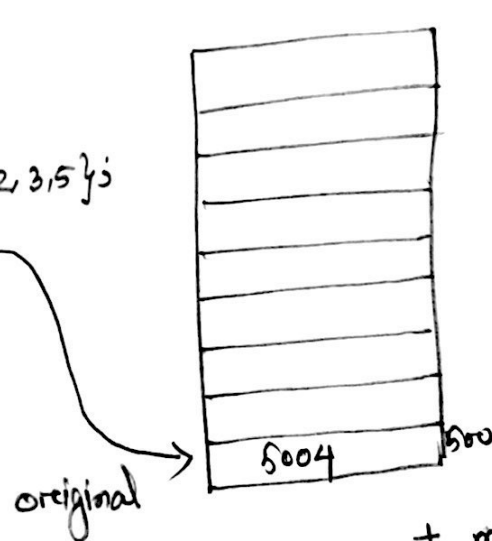

Reference does not make copy
and it will change the values into 5