Let c = { greetings: "~~Hello~~" "Hey" }

let d = c;

d = { greetings: "Hello" }

c.greeting = "Hey";

{greet: "hello"}

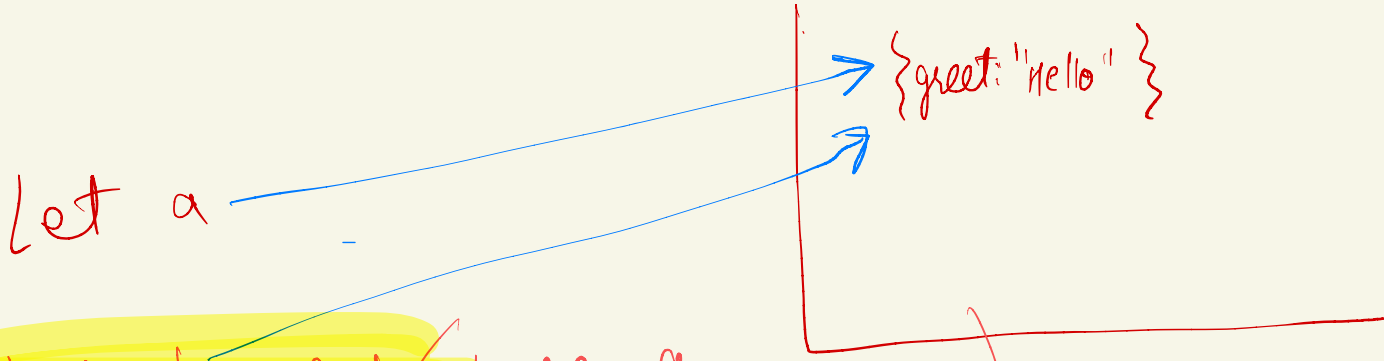

Let a

Let b = a; (here a gave address of obj to b)

Shallow copy

copy

b.greet = "namaste";

console.log(a.greet);

Let obj =

{ a: 10 }

Let newObj = {

a: 10

}

{ a: 10 }

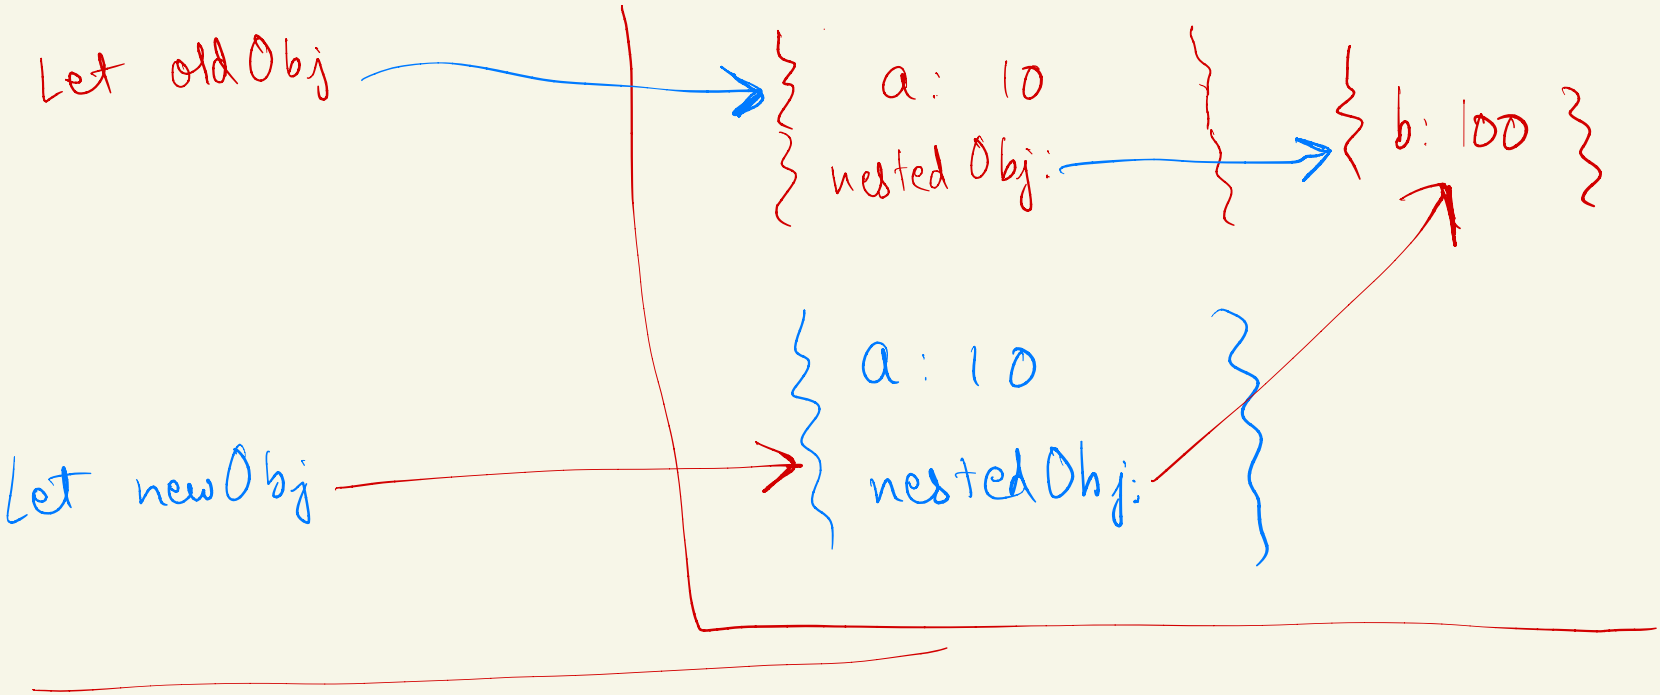
Let oldObj
a: 10
nestedObj:
b: 100
a: 10
Let newObj
nestedObj:

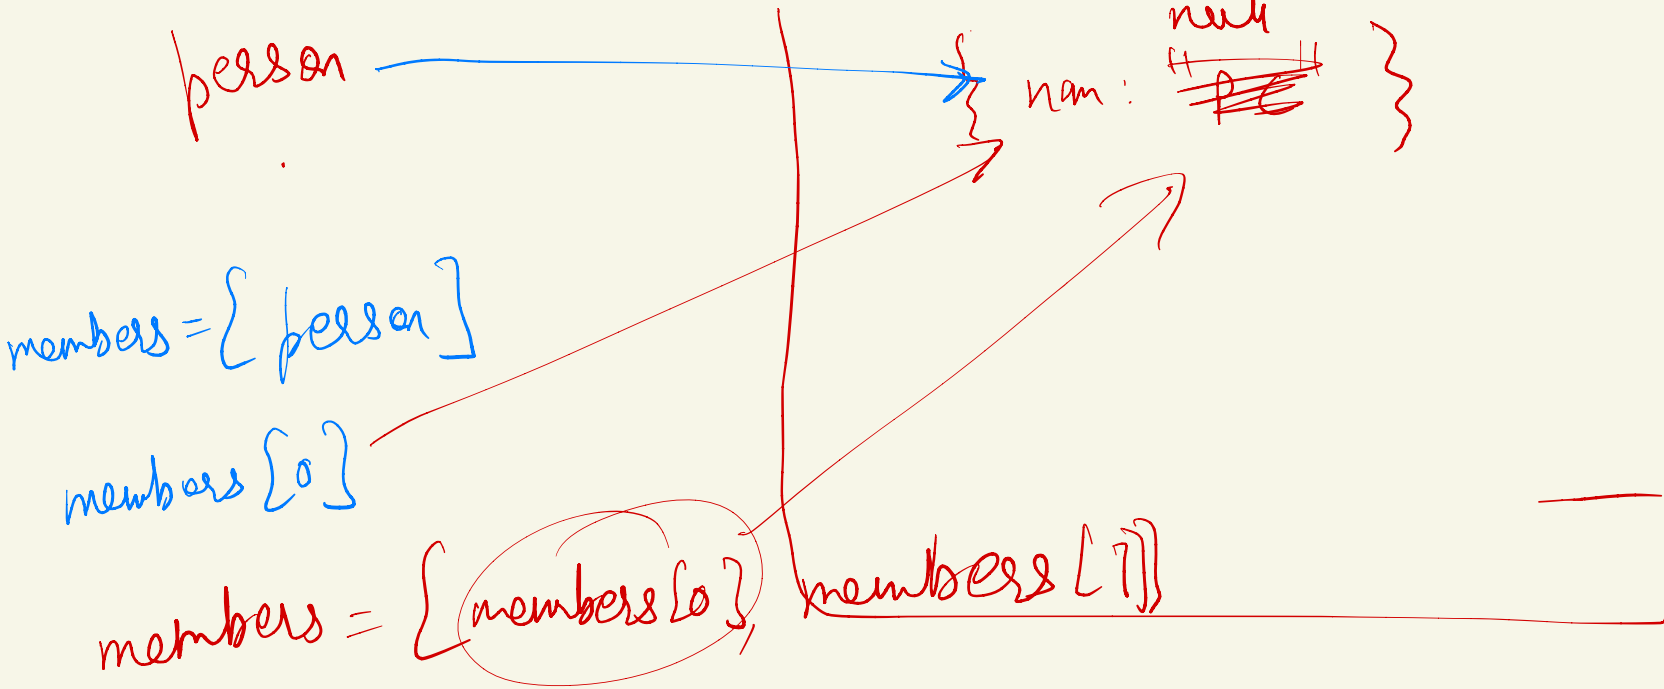
person
nam :
members = [person]
members [0]
members = [members [0], members [1]]