


The Research Operating System loop

Semantic pattern: **reinforcing loop with shared state** → visual type: **loop** · every station **IMPLEMENTED** per the loop note · verified at HEAD `ac770f7`

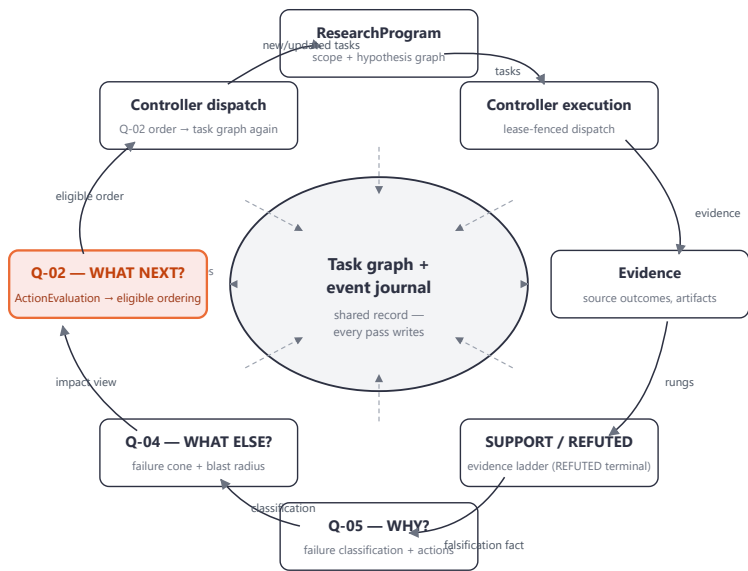

Solid ring = the closed feedback loop · dashed spokes = every station writes to the shared record · NO loop driver, NO second scheduler — the controller tick is t

Provenance manifest — diagram source

Item	Value
Repository commit	Hermes <code>ac770f7</code> (clean tree)
Semantic pattern → type	Reinforcing loop with shared state → Loop (harvested from cathrynlavery/diagram-design v2.4 @ <code>09df49d8</code> , MIT; loop rule: 5–8 stations + exactly one hub)
Files inspected	<code>hermes_research_operating_system_loop.md</code> (the 10-link loop, every EXISTS link grep-verified at writing), <code>src/hermes/research/controller.py</code> (tick/dispatch/recovery), <code>src/hermes/research/evidence_ladder.py</code> (rungs), <code>src/hermes/research/evaluation.py</code> (Q-02 ordering), <code>src/hermes/persistence/repositories.py</code>

Architecture documents	hermes_current_epistemic_architecture_review.md §L, IDR-038 (Q-02), IDR-039/040 (Q-04), IDR-041 (ladder)
Tests	Q-02 ordering suite, Q-04 cone suite, ladder APPLY suite, operator-loop suite (the tests that pin each station's behavior)
Node status	All 8 stations + hub IMPLEMENTED ; the hub is the existing task/event store — nothing new is proposed by this figure