

1. 拉取代码

注意，需要本地安装git.exe


下载地址: <https://git-scm.com/>

安装即可

使用命令克隆代码:

```
1 | git clone https://gitee.com/uncleliang/xhs-project-batch34.git
```

他可以选择下载zip包，解压

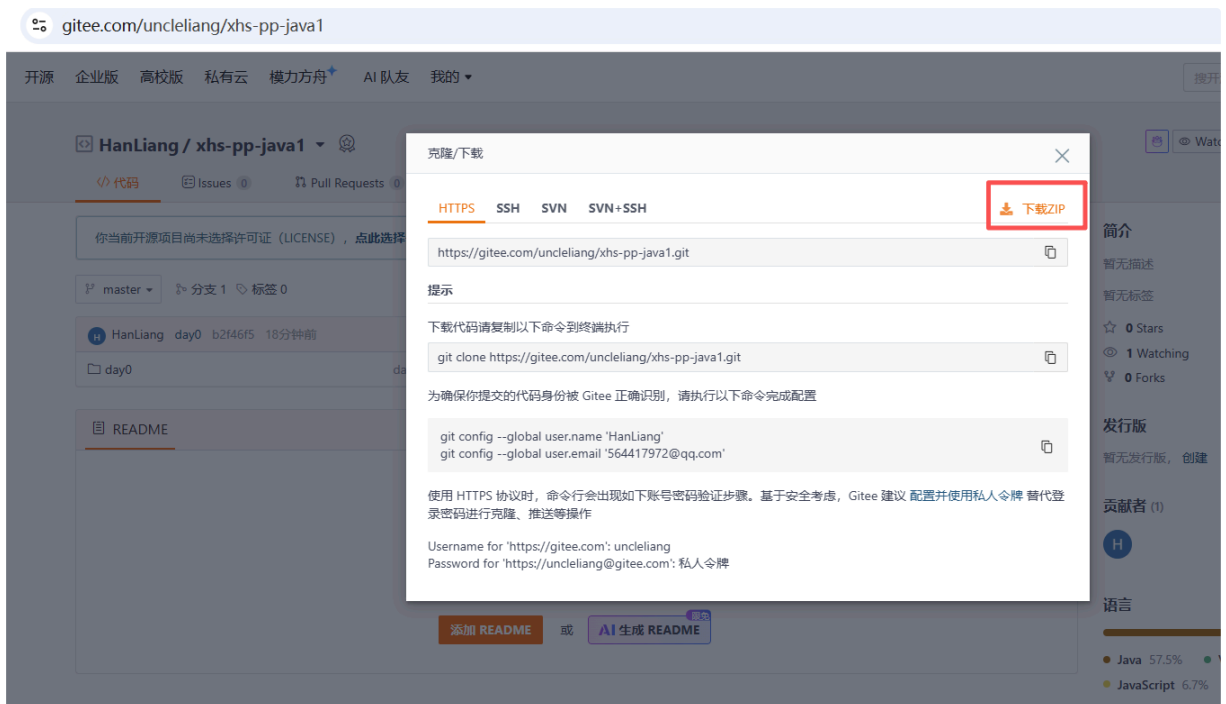


2. 执行初始化SQL，创建数据库

Navicat或者其他数据连接工具，建立连接，直接执行那个init.sql即可

3. 运行后端项目

- 1) 打开项目
- 2) 刷新Maven来下载依赖
- 3) 检查JDK等环境
- 4) 修改代码中的关于MySQL的用户名和密码

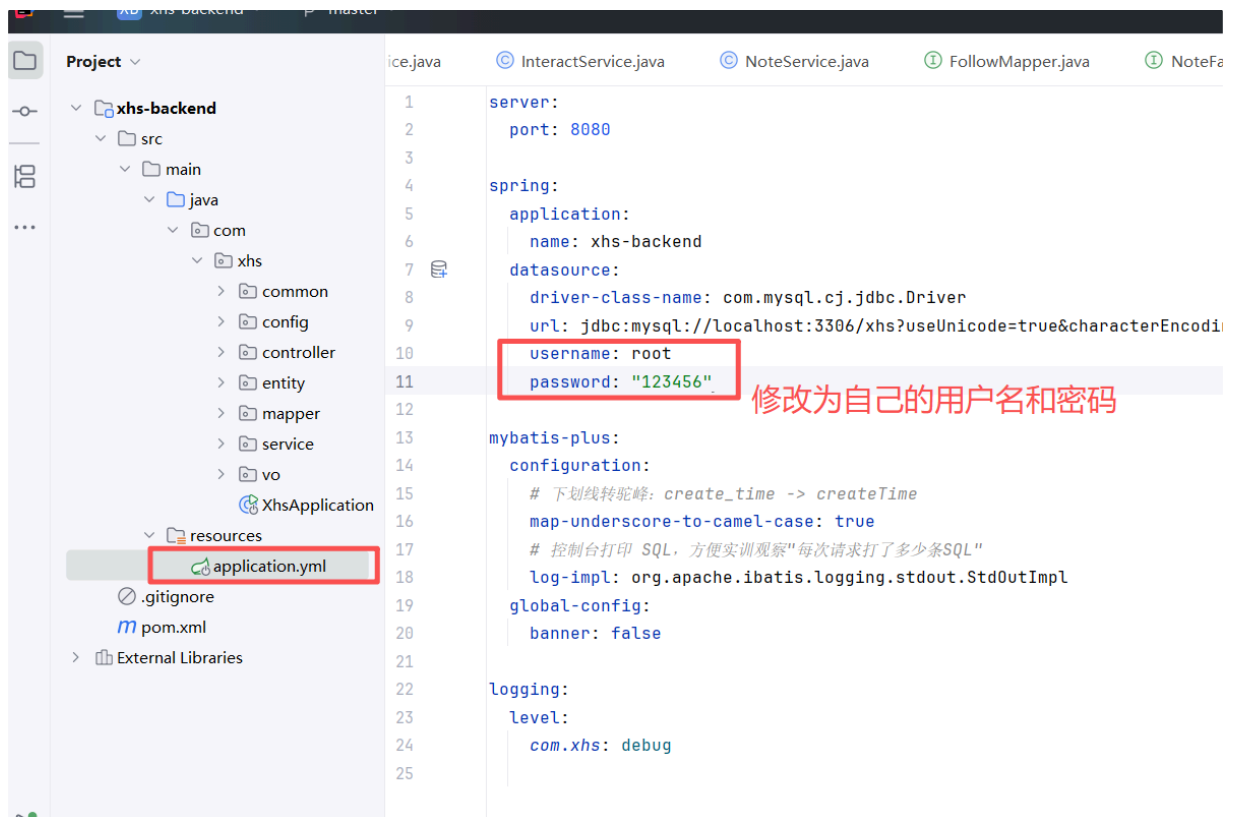

5) 运行项目，可以使用以下接口测试

1 | <http://localhost:8080/api/notes/list>

如果可以看到数据即可




4. 前端项目运行

1) 安装Node.js

<https://nodejs.org/en/download>

2)

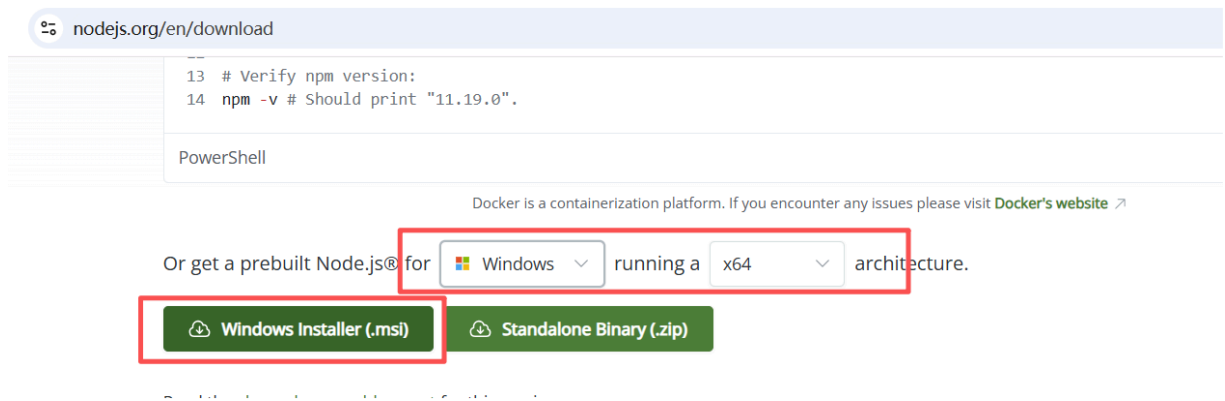

2) 前端运行

打开项目，新建终端

a. 安装依赖

```
1 npm install
```

```
PS C:\Users\hanli\Desktop\海师高并发实训\commit-files\xhs-pp-java1\day0\xhs-frontend> npm install

changed 53 packages, and audited 82 packages in 2m

15 packages are looking for funding
  run `npm fund` for details

2 vulnerabilities (1 moderate, 1 high)

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.
```

b. 运行

```
1 npm run dev
```


```
PS C:\Users\hanli\Desktop\海师高并发实训\commit-files\xhs-pp-java1\day0\xhs-frontend> npm run dev

> xhs-frontend@1.0.0 dev
> vite

The CJS build of Vite's Node API is deprecated. See https://vite.dev/guide/troubleshooting.html#vite-cjs-node-api-deprecated for more details.


VITE v5.4.21 ready in 692 ms

→ Local:   http://localhost:5173/
→ Network: use --host to expose
→ press h + enter to show help
```

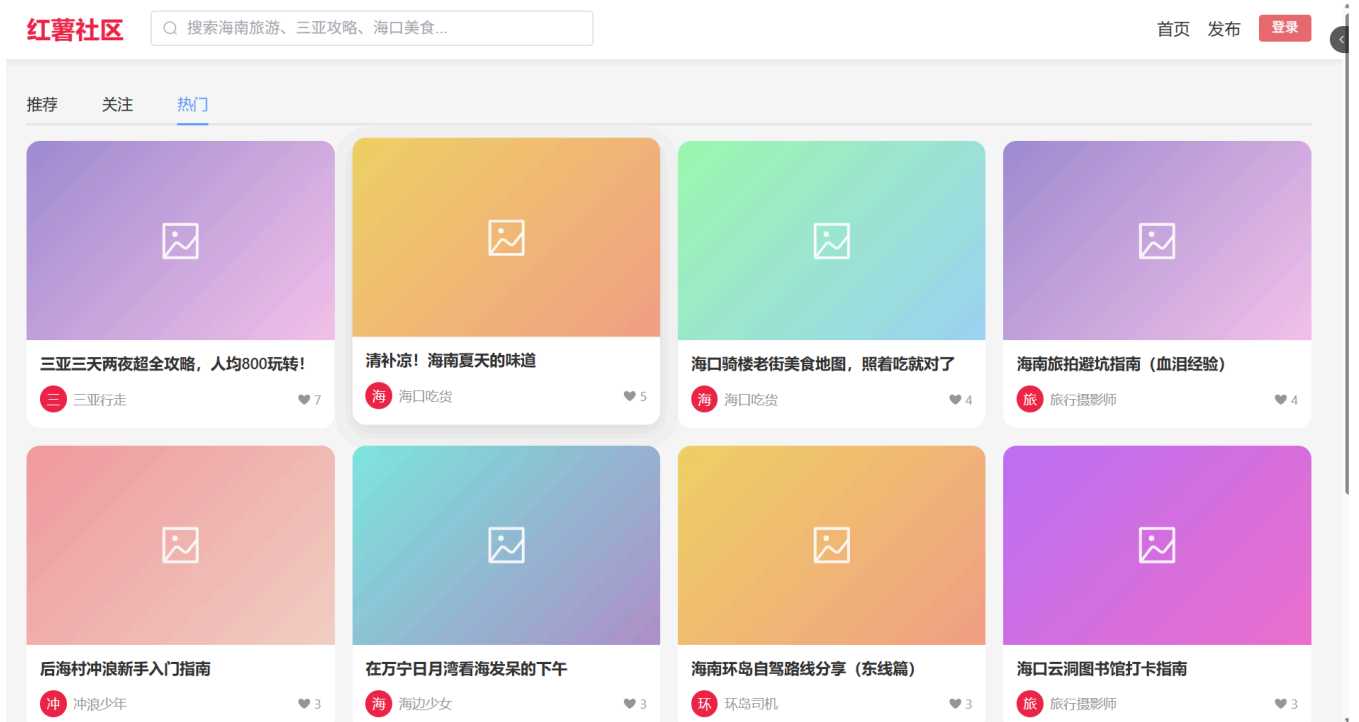


5. "JMeter探探底"


1) 下载安装JMeter

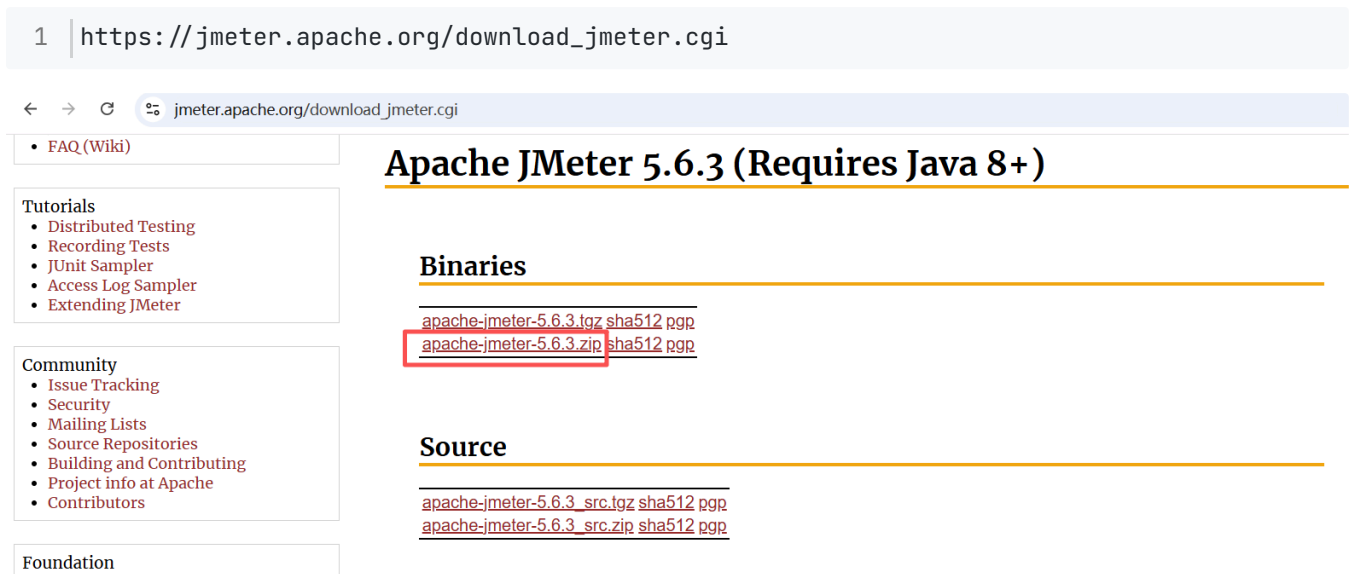

2. 解压之后就可以用了, 所以自己放一个熟悉的位置。

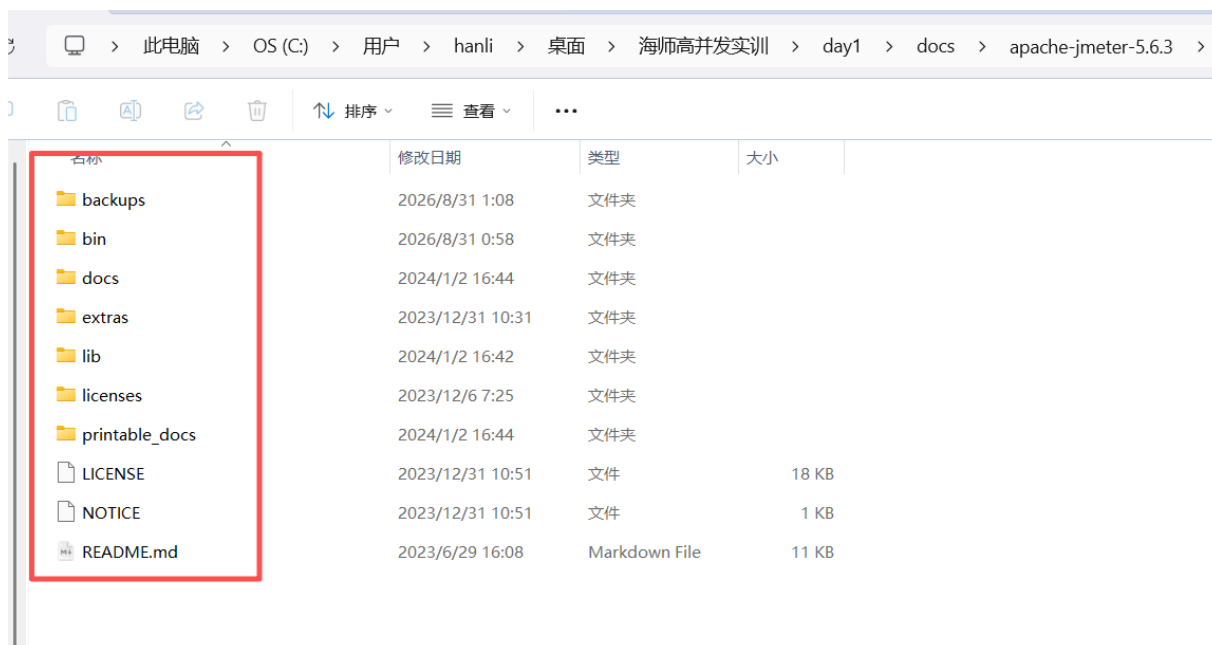


打开：双击 JMeter.bat文件

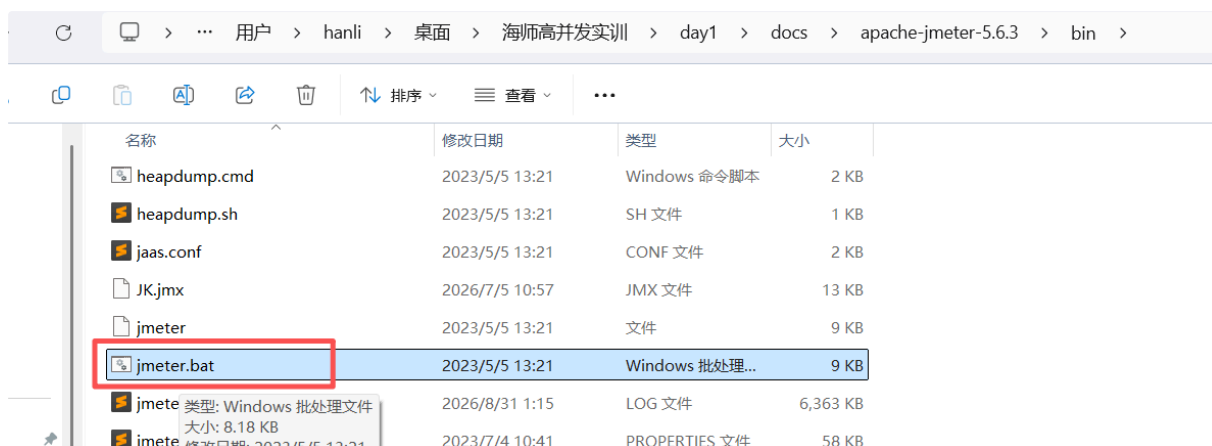


3. 测试方法：

1) 创建测试计划

文件→新建

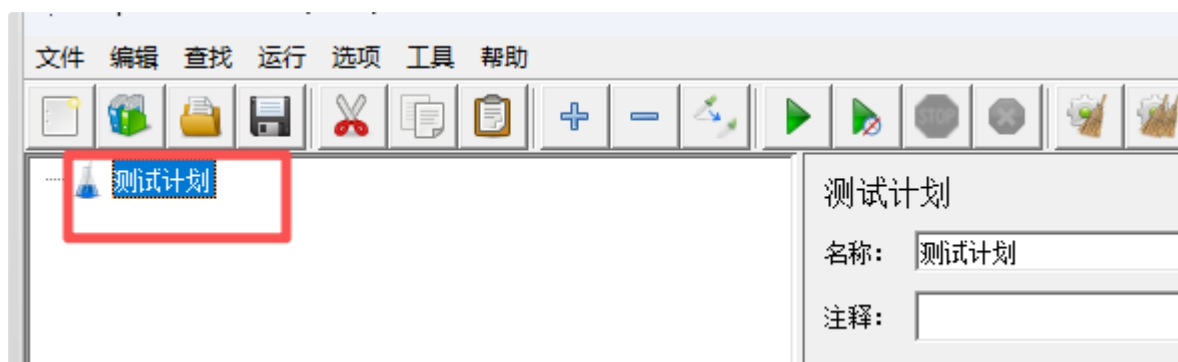


2) 创建线程组

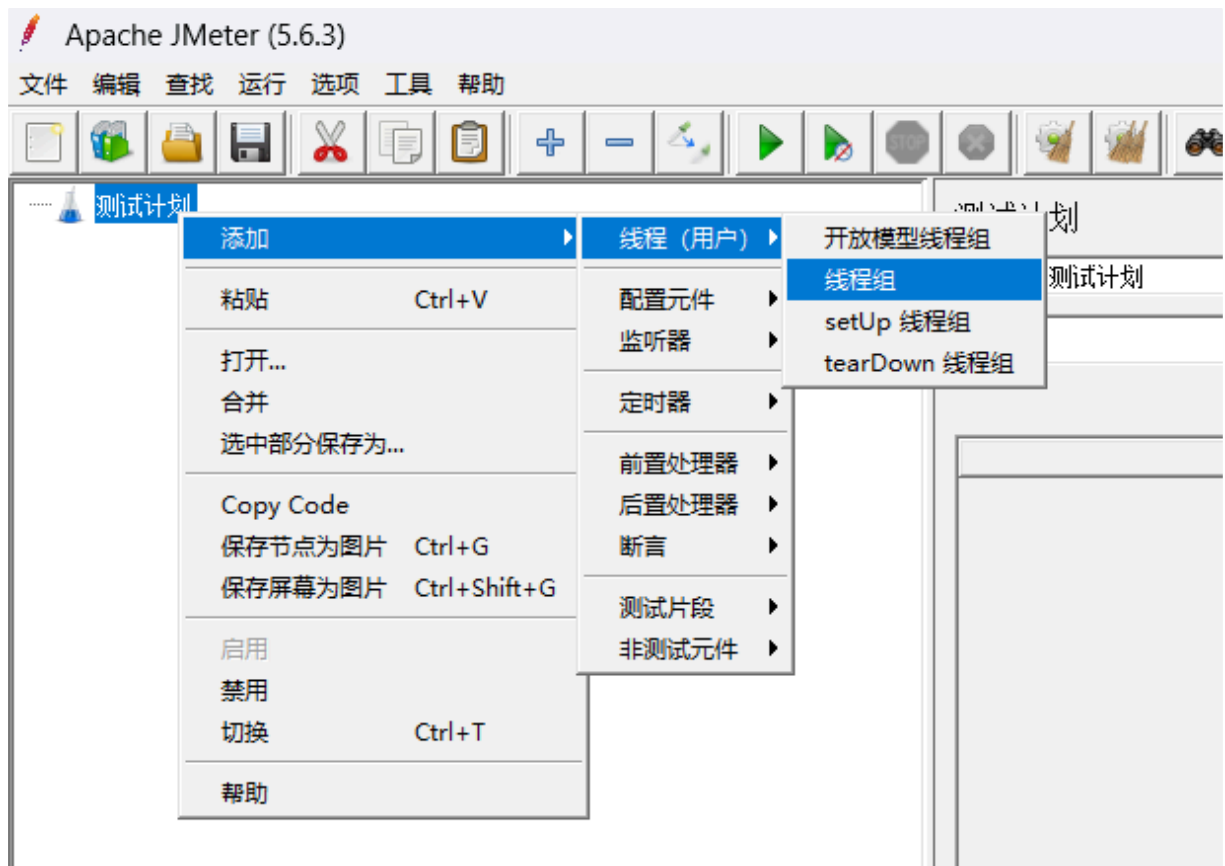

2) 配置线程组（需要多次修改，来逐步增大压力）




3) 配置请求

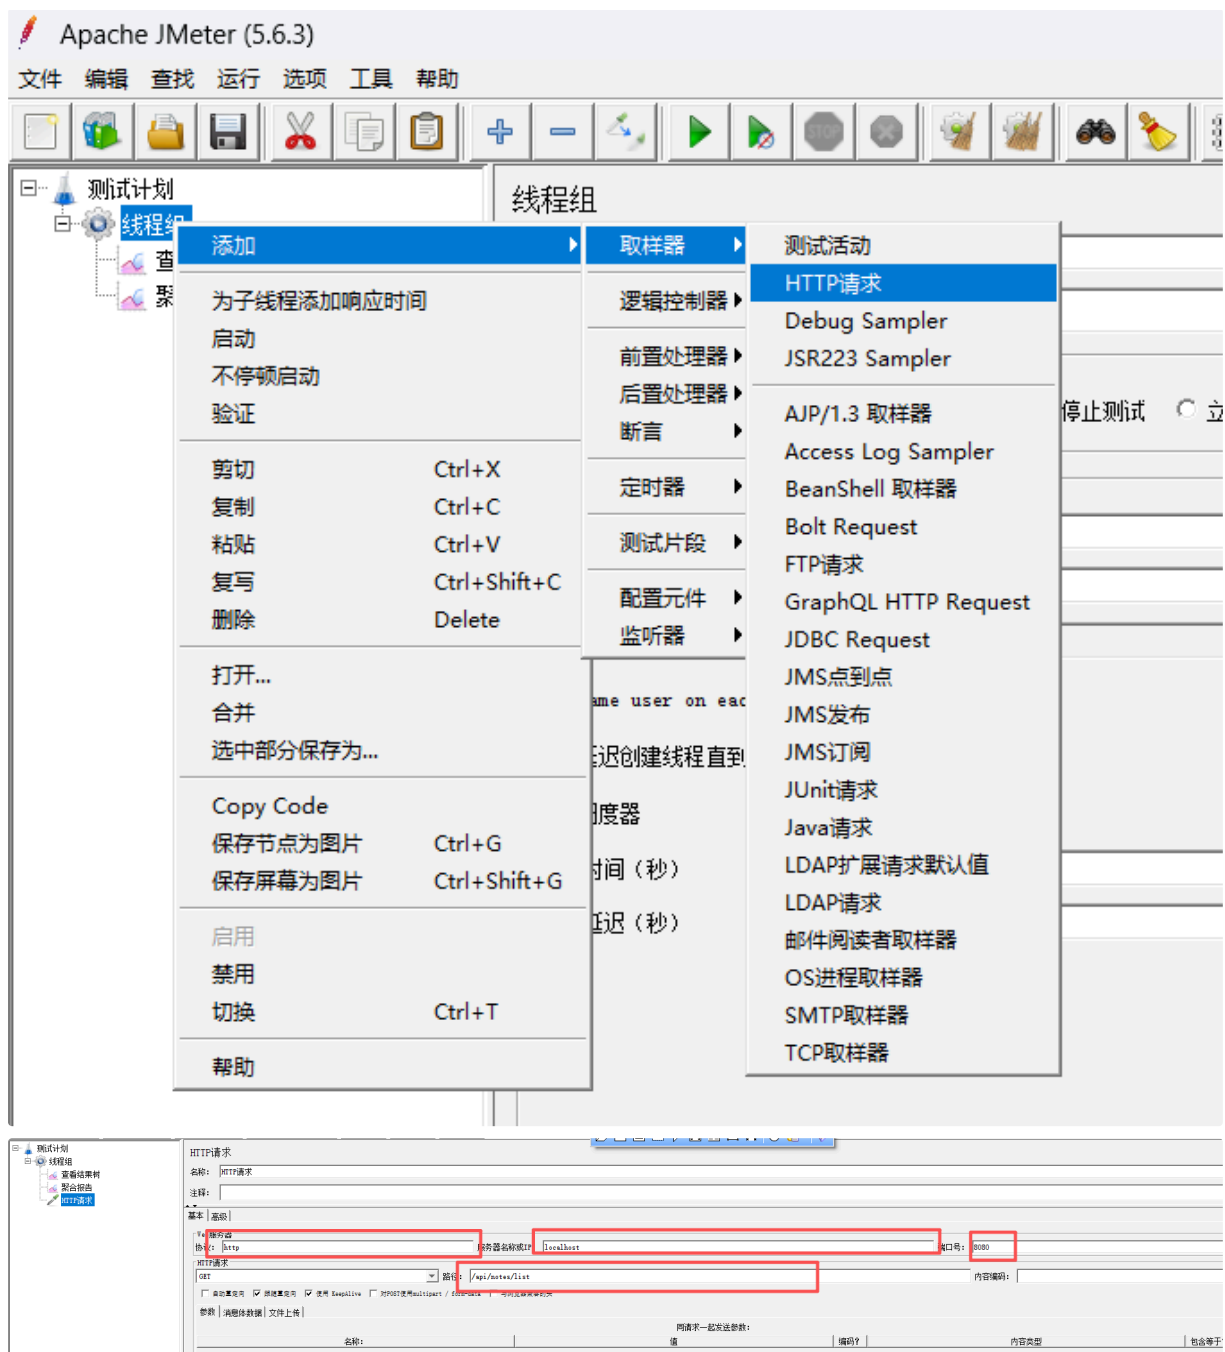


4) 添加监听


结果树

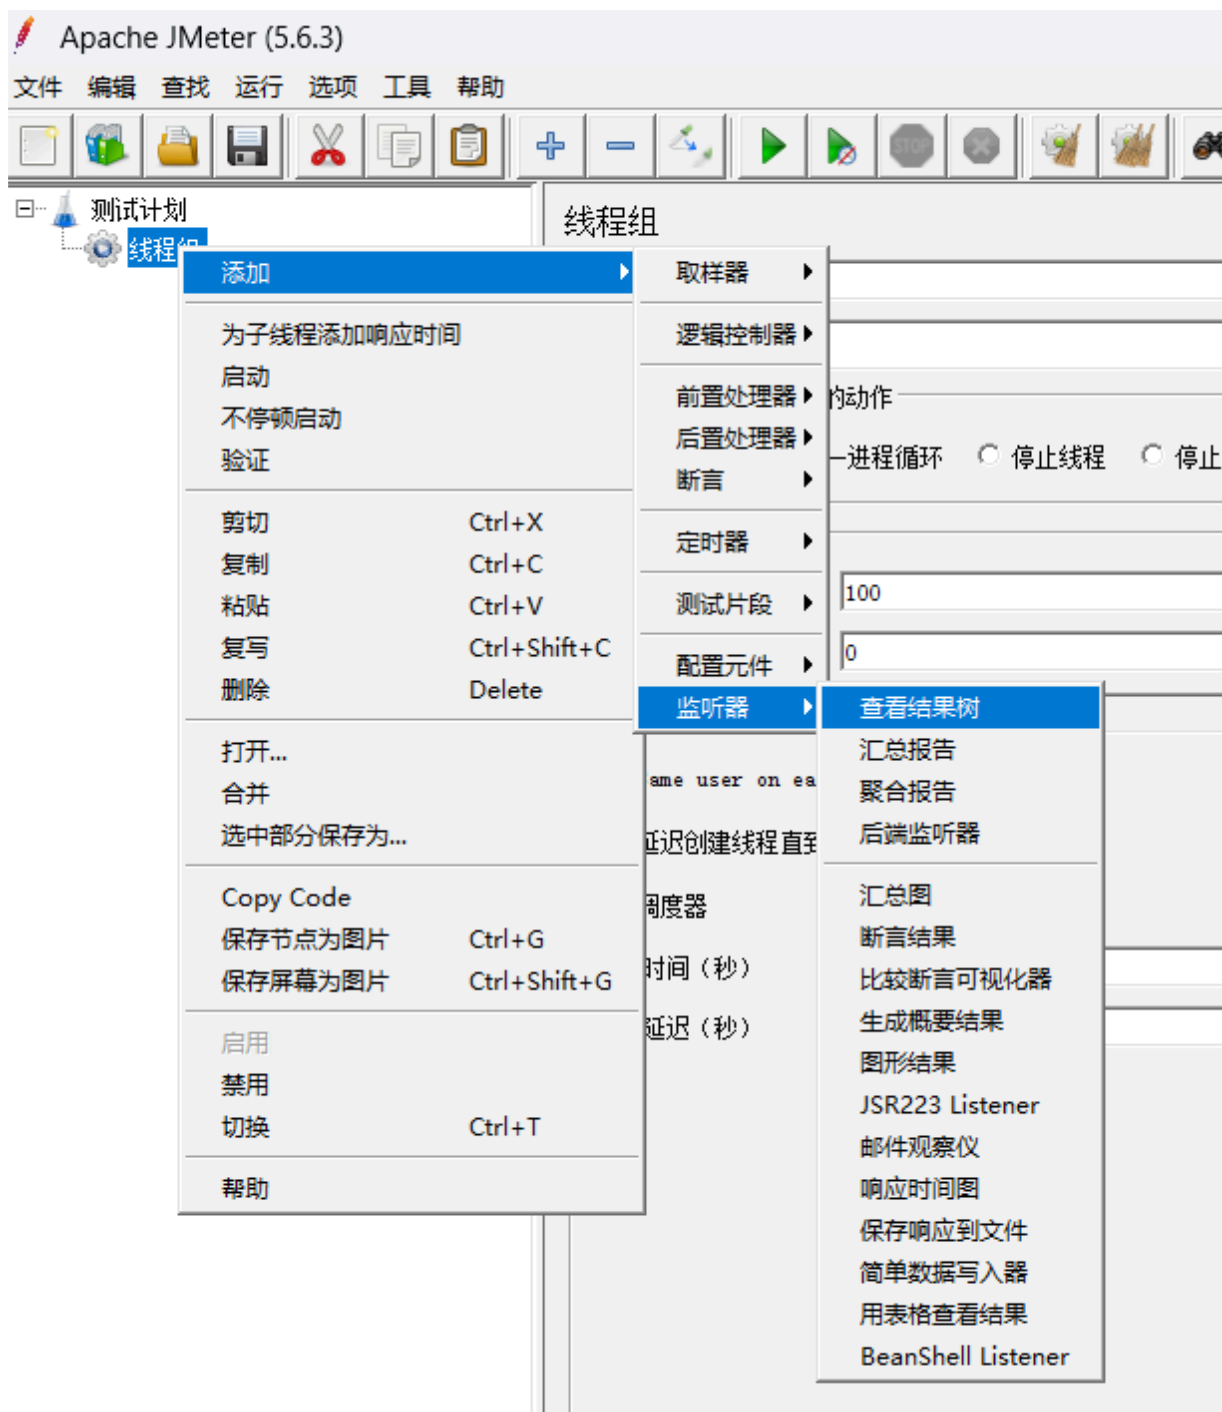

聚合结果

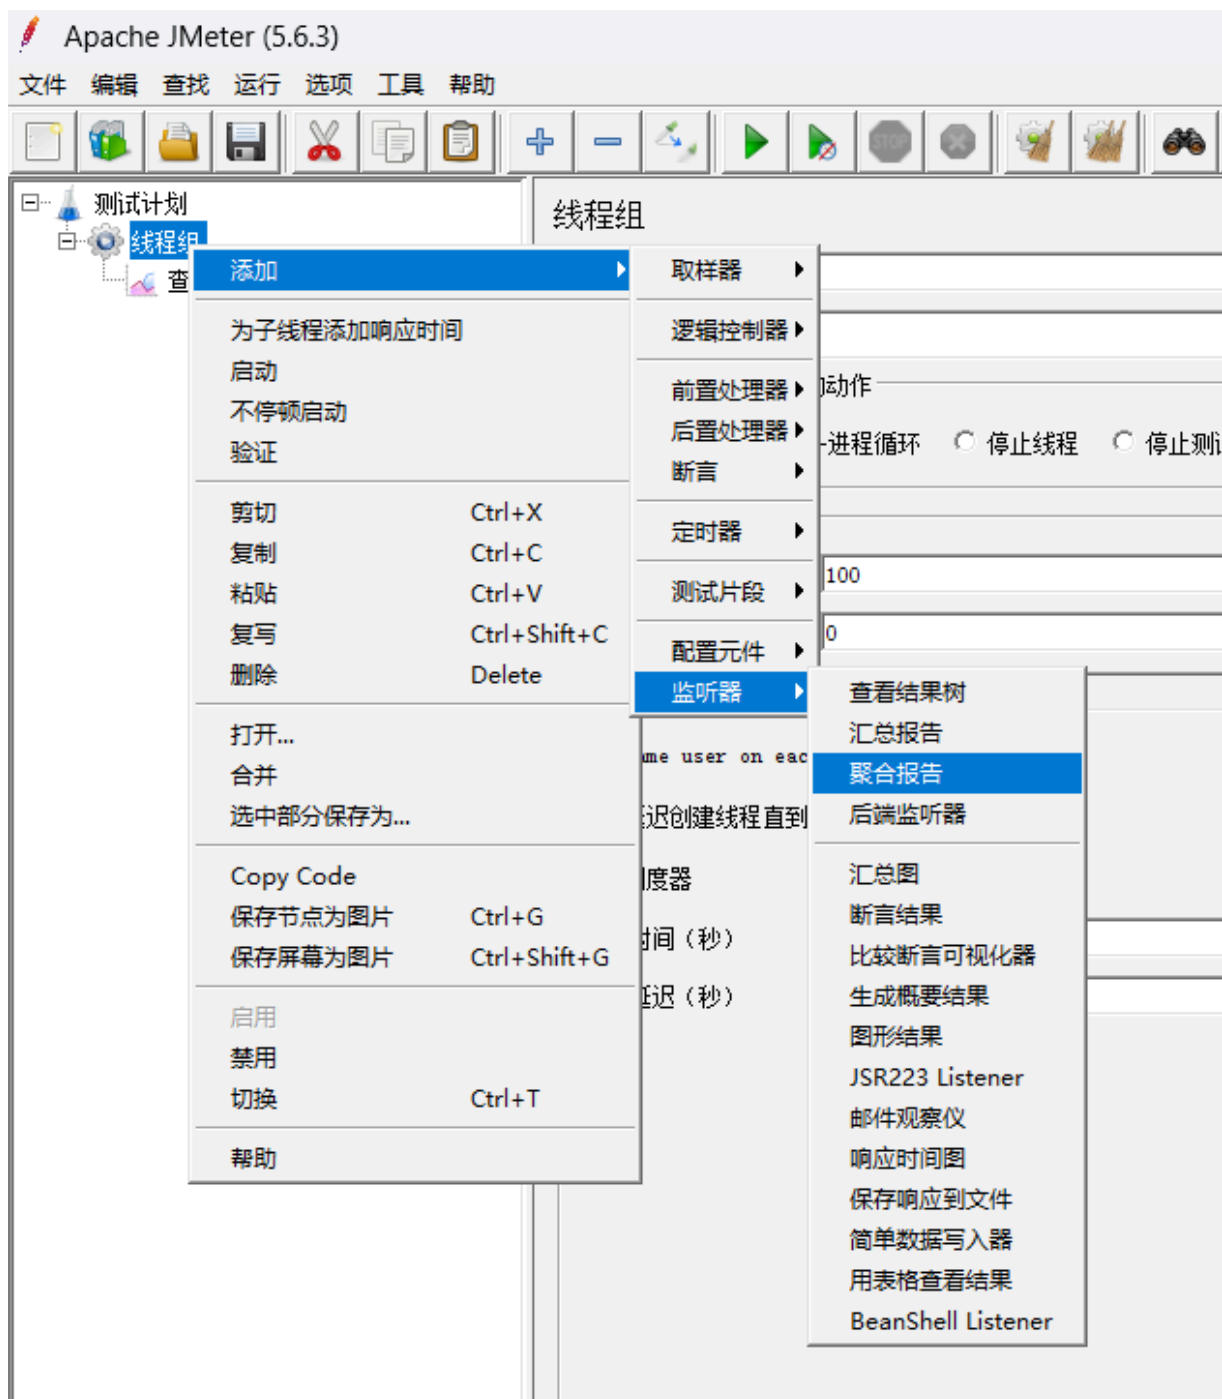


安装docker Desktop

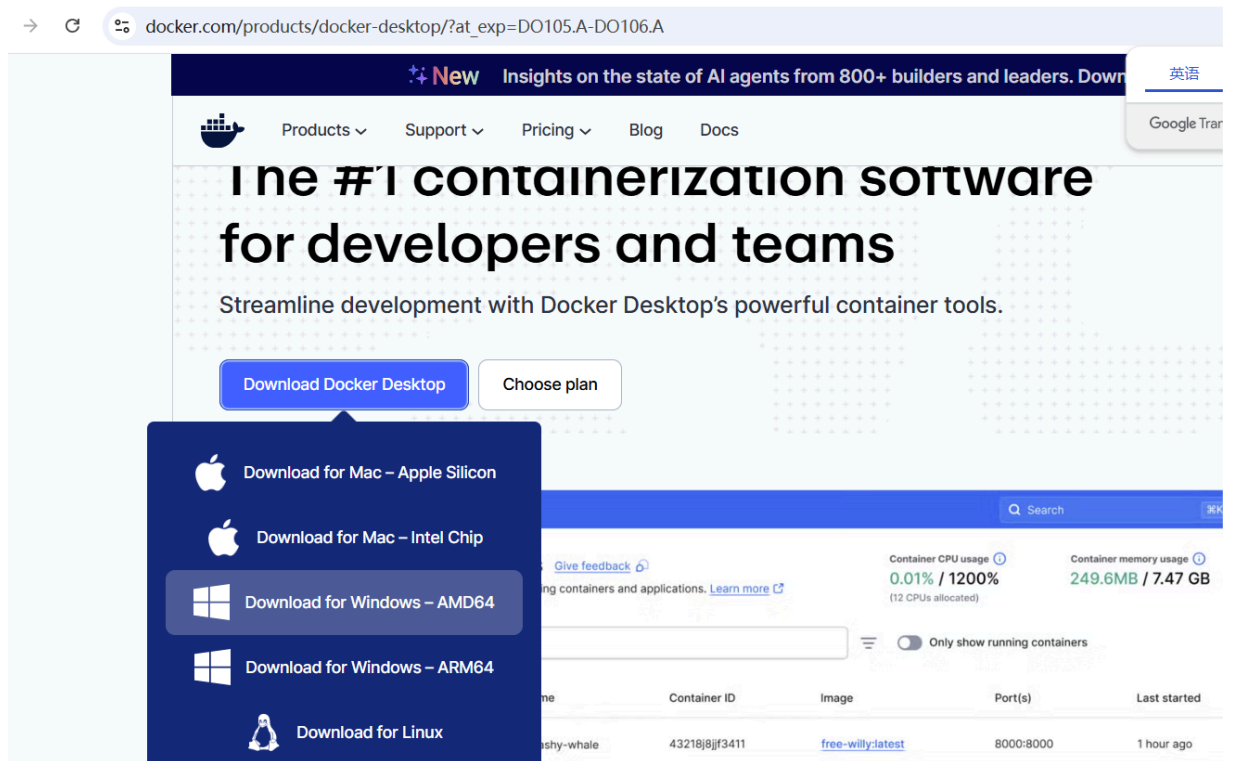

使用docker compose命令可以直接安装几个软件到docker(MySQL,Redis,RabbitMQ,ES)

如果电脑已经有了MySQL或者redis等软件可以注释掉响应的部分。


需要使用配置好的 docker-compose.yml文件 创建文件保存到文件夹, 建议保存在Java项目根目录

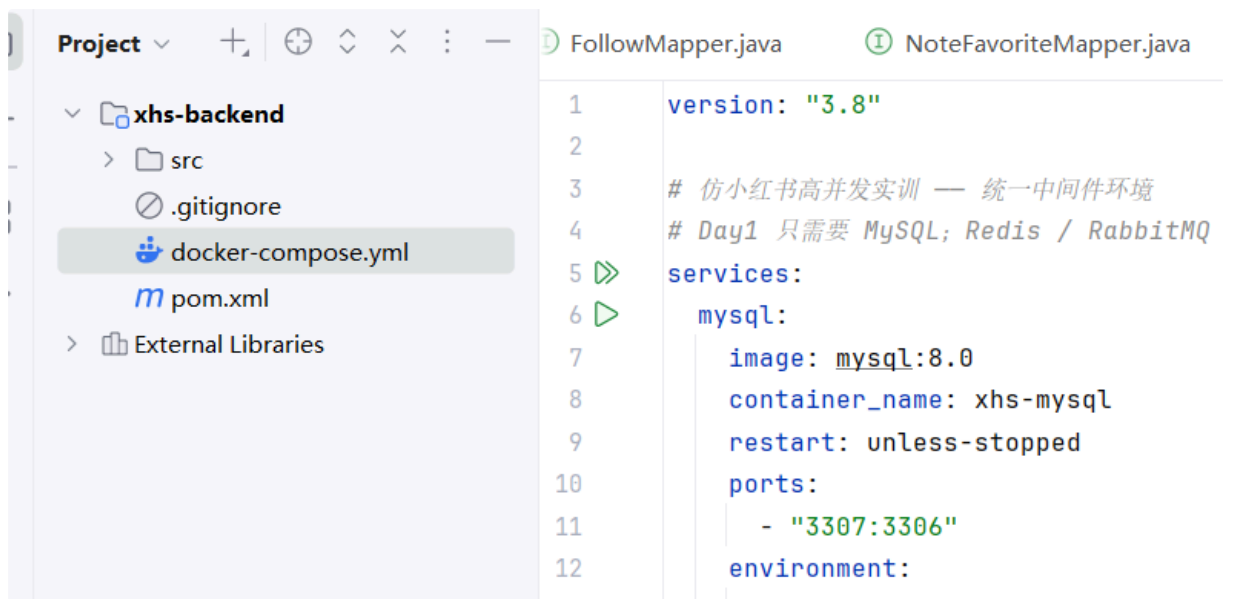

```
11     - "3307:3306"
12     environment:
13         MYSQL_ROOT_PASSWORD: "123456"
14         MYSQL_DATABASE: xhs
15         TZ: Asia/Shanghai
16     command: --character-set-server=utf8mb4 --collation-
server=utf8mb4_unicode_ci
17     volumes:
18         - mysql-data:/var/lib/mysql
19         # 首次启动自动执行建库建表与测试数据脚本
20     healthcheck:
21         test: ["CMD", "mysqladmin", "ping", "-h", "localhost", "-p123456"]
22         interval: 5s
23         timeout: 3s
24         retries: 30
25
26     redis:
27         image: redis:7
28         container_name: xhs-redis
29         restart: unless-stopped
30         ports:
31             - "6379:6379"
32         volumes:
33             - redis-data:/data
34
35     rabbitmq:
36         image: rabbitmq:3.12-management
37         container_name: xhs-rabbitmq
38         restart: unless-stopped
39         ports:
40             - "5672:5672"          # AMQP
41             - "15672:15672"       # 管理台 (guest / guest)
42         environment:
43             RABBITMQ_DEFAULT_USER: guest
44             RABBITMQ_DEFAULT_PASS: guest
45         volumes:
46             - rabbitmq-data:/var/lib/rabbitmq
47
48     elasticsearch:
49         image: docker.elastic.co/elasticsearch/elasticsearch:8.8.2
50         container_name: xhs-elasticsearch
51         restart: unless-stopped
52         ports:
53             - "9200:9200"
54         environment:
55             discovery.type: single-node
56             xpack.security.enabled: "false"
57             ES_JAVA_OPTS: "-Xms512m -Xmx512m"
58         volumes:
59             - es-data:/usr/share/elasticsearch/data
60
61     volumes:
```

```
62  mysql-data:
63  redis-data:
64  rabbitmq-data:
65  es-data:
66
```

打开终端

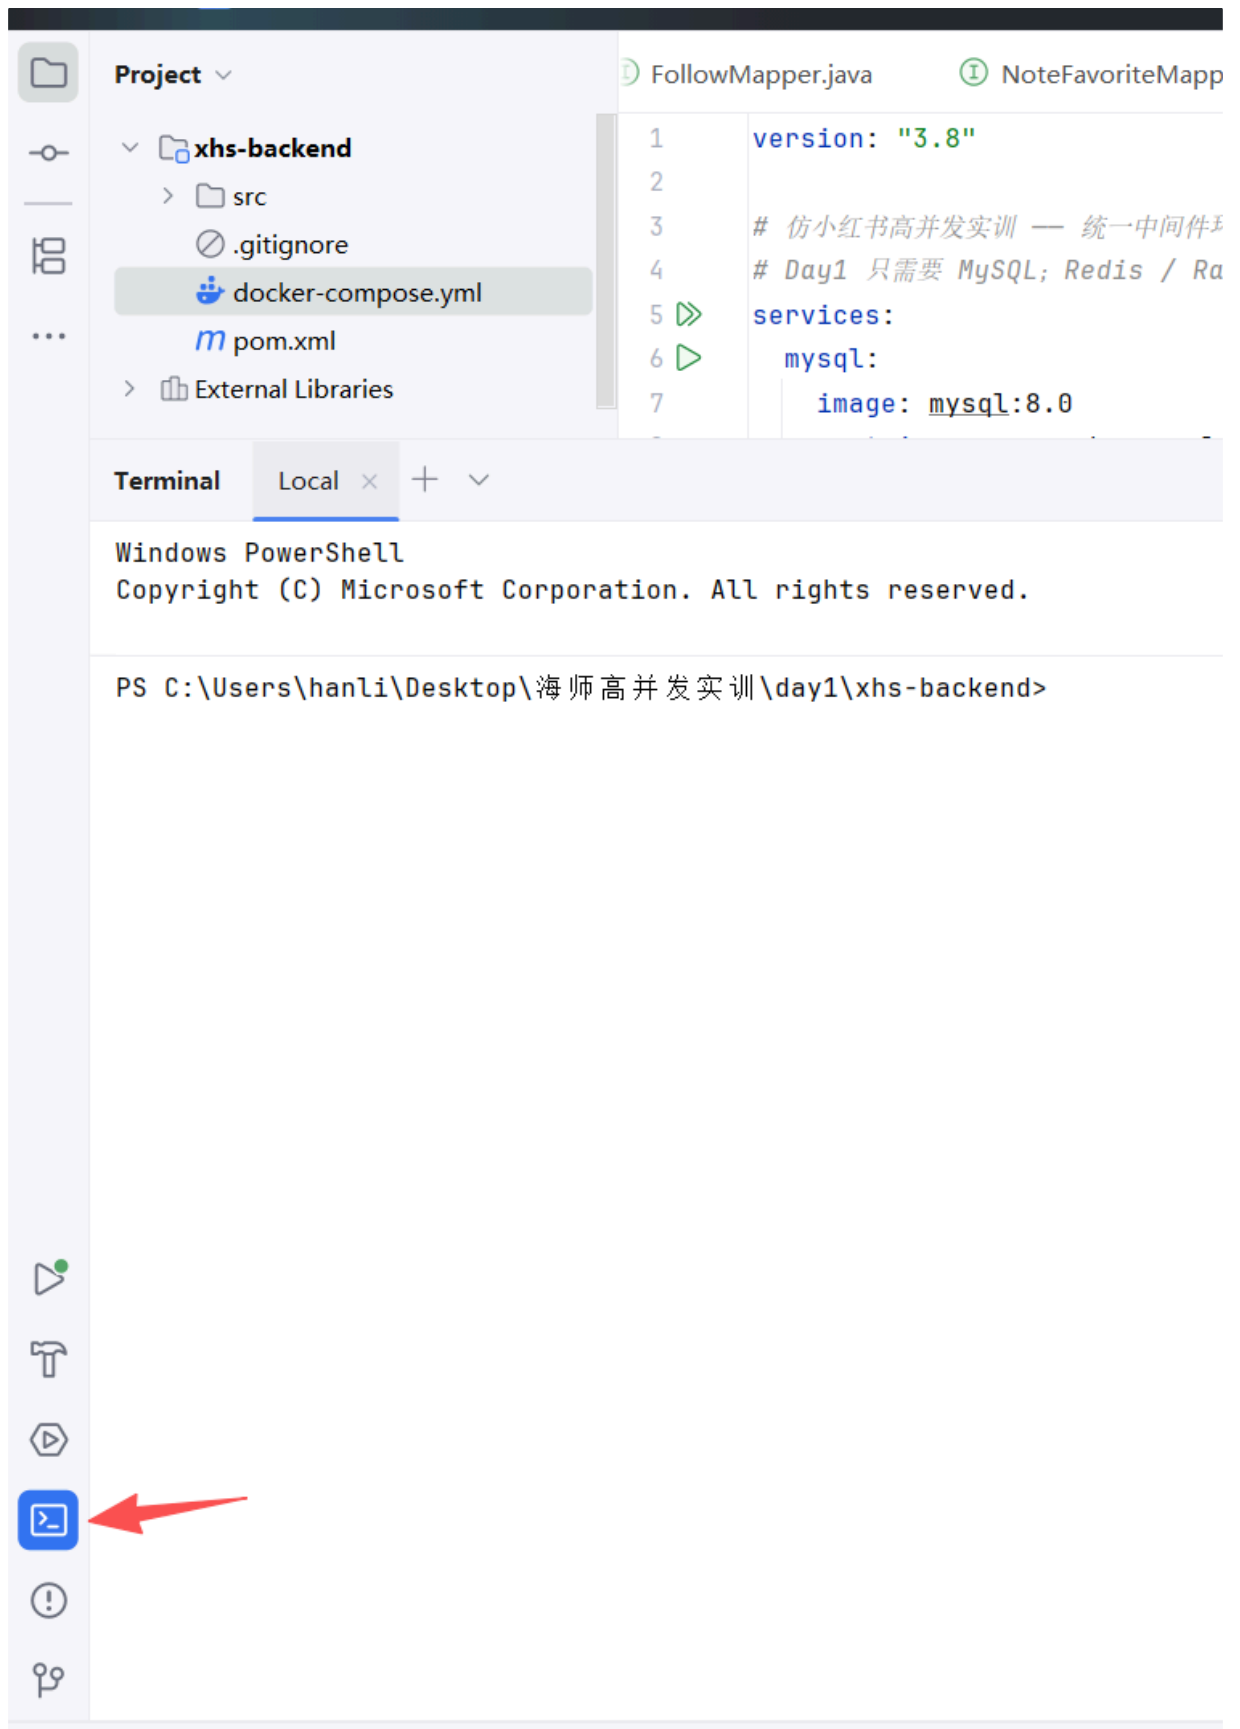

Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

PS C:\Users\hanli\Desktop\海师高并发实训\day1\xhs-backend> ls

目录: C:\Users\hanli\Desktop\海师高并发实训\day1\xhs-backend

Mode	LastWriteTime		Length	Name
d-----	2026/8/31	10:42		.idea
d-----	2026/8/30	23:04		src
d-----	2026/8/31	9:18		target
-a----	2026/8/31	8:55	413	.gitignore
-a----	2026/8/31	10:42	1732	docker-compose.yml
-a----	2026/8/31	9:18	2703	pom.xml

PS C:\Users\hanli\Desktop\海师高并发实训\day1\xhs-backend>

执行以下命令安装:

```
1 | docker compose up -d
```