

ACEP Data Catalog User Guides

Jenae Matson

2024-08-05

Table of contents

Welcome	4
1 Getting Started	5
Making an Account	5
Searching for Datasets	6
Submitting a Comment/Complaint	7
2 Researcher	8
Posting a Dataset	8
Tagging a Dataset	10
Editing/Deleting a Dataset	11
Adding a Dataset to a Group	12
Creating a New Group	13
3 Admin	15
Giving User Permissions	15
Reviewing and Publishing a Dataset	16
Deleting Datasets/Groups/Organizations	17
Purge Deleted Datasets/Groups/Organizations	17
Restore Deleted Datasets	18
Restoring a Deleted User	20
Metadata Walkthrough	21
Dataset Fields	21
Title	21
Description	21
Keywords	21
Contact Points	21
License	21
Organization	22
Visibility	22
Publisher	22
Landing Page	22
Release Date	22
Modification Date	22
Version	22

Version Notes	22
Identifier	23
Provenance	23
Type	23
Temporal Coverage	23
Spatial Coverage	23
Language	23
Documentation	23
Conforms to	24
Is referenced by	24
URI	24
Resource Fields	24
Name	24
Description	24
Format	24
GitHub Repo	24
Status	24
License	24
Access URL	25
Download URL	25
Release Date	25
Modification Date	25
Language	25
Documentation	25
Conforms to	25
Access Services	25
URI	25
For Developers	26
Data Sources Overview	27
Developing the Data Catalog	28
Basic Docker Commands	28
Creating a Local Instance	29
Create a New Extension	31
Install an Extension	31
Updating the Main Site	31
Extensions	32
Currently Installed	32
Adding Alternate Schemas with ckanext-scheming	37
Attempted Extensions	37

Welcome

This documentation provides some helpful tutorials for working with the ACEP Data Catalog.

The screenshot shows the ACEP Data Catalog homepage. At the top, there is a navigation bar with links for Log In, Register, Datasets, Organizations, Groups, About, FAQ, and a search bar. The main header says "Welcome to the ACEP Data Catalog" and features a large image of solar panels and a wind turbine. To the right, there is a sidebar with a word cloud of energy-related terms like "energy", "solar", "wind", etc., and a section titled "Inventory of Alaska Energy Datasets and Systems". Below the main content area, there is a "Search Datasets" bar and a grid of six categories: Beneficial and Equitable Electrification, Energy Statistics, Marine Energy, Power Systems Integration, Solar Technologies, and Tanana River Test Site.

Welcome to the ACEP Data Catalog

Log In Register

Datasets Organizations Groups About FAQ Search

aggregator atlantic dashboards doe climate hydrokinetic documents energy type end information usgs national database federated gis aldot utilities maps active economic project library natural state alaska built and laboratory geothermal community right states hub datasets renewable authority resources center geospatial net openet

Inventory of Alaska Energy Datasets and Systems

More Alaska Energy Data resources.

Search Datasets

E.g. Tanana River Test Site

Beneficial and Equitable Electrification 0 Datasets

Energy Statistics 5 Datasets

Marine Energy 0 Datasets

Power Systems Integration 0 Datasets

Solar Technologies 0 Datasets


Tanana River Test Site 4 Datasets

1 Getting Started

Guides for anyone using the data catalog.

Making an Account

1. Click the **Register** button in the upper right corner of the screen.

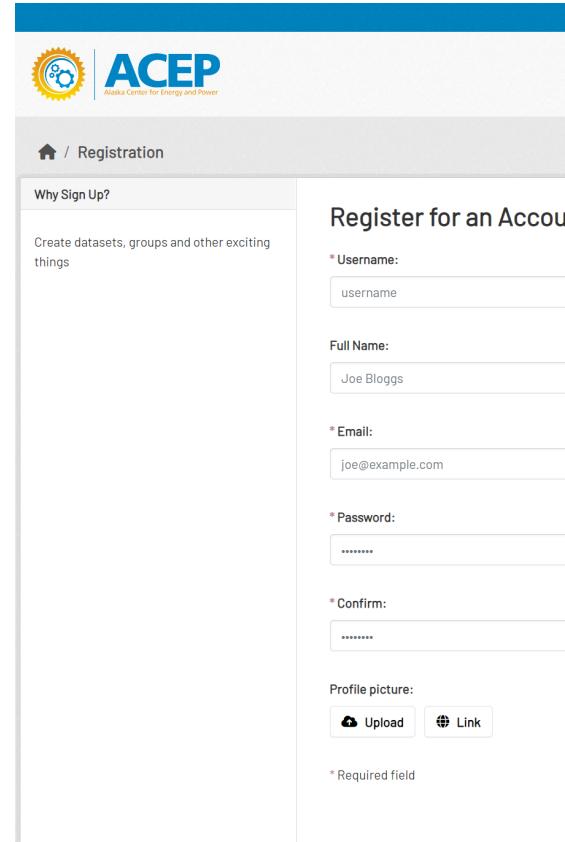

The screenshot shows the ACEP (Alaska Center for Energy and Power) registration page. At the top, there's a logo for ACEP and a subtext "Alaska Center for Energy and Power". Below the logo, the page title is "Registration". On the left, there's a sidebar with a "Why Sign Up?" section containing the text "Create datasets, groups and other exciting things". The main form area has several input fields:

- "Username": A text input field containing "username".
- "Full Name": A text input field containing "Joe Bloggs".
- "Email": A text input field containing "joe@example.com".
- "Password": A password input field containing "*****".
- "Confirm": A password confirmation input field containing "*****".
- "Profile picture": A section with "Upload" and "Link" buttons.

A note at the bottom right of the form says "* Required field".

2. Fill out your information, using your UA email if you have one.
3. In order to see the Internal Use datasets or post datasets, you will need permissions granted to your account. If you are an ACEP employee, contact Liz or another admin.

Searching for Datasets

There are many ways to search for datasets in the catalog.

- **Search Bar**


Use key words to find datasets, just like Google. On the left sidebar of the search results page, you can filter by tags and other categories to get more specific results.

The screenshot shows a search results page for the term "Tanana". The left sidebar contains filters for Organizations (ACEP Open Data - 3), Groups (Tanana River Test Site - 3), Tags (Alaska - 3, CEC - 3, Code - 3, Energy - 3, Hydrokinetic - 3, Marine - 3, MATLAB - 3, MHK - 3, Nenana - 3, Power - 3), Formats (none found), and Licenses (none found). The main search bar has "Tanana" entered, and the results are ordered by Relevance. Three datasets are listed:

- Water Horse Hydroelectric Harvester Single Oscillator Field Testing Data,...**
Raw and processed timeseries data generated during field testing of a single oscillating hydrofoil Water Horse prototype at PMEC (Pacific Marine Energy Center) Tanana River Test...
Tags: Alaska, CEC, Code, Current Energy Converter, Energy, Field Test Content Model, Hydrokinetic, MATLAB, MHK, Marine, Nenana, Oscillating Hydrofoil, Power, Pre-Processed Data, Processed Data, Raw Data, River, Tanana River, Technology
- Water Horse Hydroelectric Harvester Dual Oscillator Field Testing Data,...**
Raw and processed timeseries data generated during field testing of a single oscillating hydrofoil Water Horse prototype at PMEC (Pacific Marine Energy Center) Tanana River Test...
Tags: Alaska, CEC, Code, Current Energy Converter, Energy, Field Test Content Model, Hydrokinetic, MATLAB, MHK, Marine, Nenana, Oscillating Hydrofoil, Power, Pre-Processed Data, Processed Data, Raw Data, River, Tanana River, Technology
- Simulink Model of a New Energy EVG-005 5kW Hydropower Turbine**
Simulink model for a New Energy 5kW hydropower turbine. ADCP data ("ds_streamwise_7_13.nc") and DC voltage, DC current, and rotor rotation observed from the New Energy EVG-005...

- **Groups**

Browse through the groups that can be found at the **Groups** tab at the top of the screen

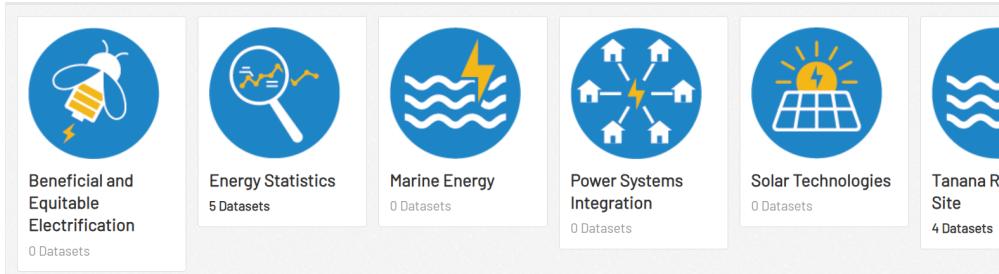

or listed on the home page.

- **Organizations**

Sort by larger categories by looking the **Organization** tab at the top of the screen.

- The **ACEP Open Data** organization holds datasets created and owned by ACEP’s research teams.
- The **ACEP Internal Use** organization holds datasets that ACEP does not own. These are useful resources for ACEP researchers. **You must be an ACEP employee to gain access to these datasets.** Contact Liz to get the necessary permissions for your account.

Submitting a Comment/Complaint

If you find a problem with a dataset or have a comment or suggestion for the data catalog, please contact the ACEP data team at uaf-acep-dcm-support@alaska.edu.

2 Researcher

Guides for researchers and those posting datasets to the catalog.

Posting a Dataset

There are two ways to access the **Add Dataset** button:

- Click on the **Datasets** tab at the top of the screen
 - Click on the **Organizations** tab at the top of the screen and select the organization you want to add a dataset to:
 - Choose **ACEP Open Data** if you are posting your own data or data that ACEP owns.
 - Choose **ACEP Internal Use** if you are posting a useful dataset that ACEP does not own.
1. Click on the **Add Dataset** button above the search bar.
 2. On the first page, fill out the metadata fields for your dataset.
 - For examples and more information about the metadata fields, see the [Metadata](#)

The screenshot shows the ACEP CKAN Dataset creation interface. On the left, there's a sidebar with a question 'What are datasets?' and a detailed answer about CKAN Datasets. The main area has a green progress bar at the top with two steps: '1 Create Dataset' and '2 Add data'. Below the progress bar are several input fields: 'Title' (with placeholder 'eg. A descriptive title'), 'URL' (with placeholder 'eg. portal.lab.acep.uaf.edu/dataset/<dataset>'), 'Description' (with placeholder 'eg. Some useful notes about the data' and a note 'You can use Markdown formatting here'), 'Tags' (with placeholder 'eg. economy, mental health, government'), 'License' (a dropdown menu with placeholder 'Please select the license' and a note 'License definitions and additional information can be found at [opendefinition.org](#)'), 'Organization' (a dropdown menu with placeholder 'ACEP Internal Use'), and 'Visibility' (a dropdown menu). The URL field has an 'Edit' button.

Walkthrough.

- Double check the organization field.
 - Choose **ACEP Open Data** if you are posting your own data or data that ACEP owns.
 - Choose **ACEP Internal Use** if you are posting a useful dataset that ACEP does not own.
 - If you are a researcher, your dataset's visibility will automatically be set to private. An admin will review your dataset and make it public.
3. Once you have completed the metadata fields, click the **Next: Add Data** button at the bottom of the form.

4. On the next page, add the data resources to your dataset.
 - Small datasets (<2MB) can be uploaded directly to the catalog
 - Alternatively, enter a link to where the data is stored, such as a GitHub repository or Google Drive.
5. If you have more resources to add, click the **Save & add another** button at the bottom of the form. Otherwise click **Finish** to post your dataset.

Tagging a Dataset

TBD

Editing/Deleting a Dataset

1. Navigate to the dataset page and click on the **Manage** button in the upper right.

The screenshot shows the ACEP dataset page for "Alaska Railroad Features". At the top right, there is a red circle highlighting the "Manage" button. The page includes sections for Followers (0), Organization (ACEP Internal Use), Data and Resources (listing four geojson files: Crossings.geojson, MP.geojson, Railroad_Boundary.geojson, and Track_Centerline.geojson, each with an "Explore" button), and Metadata (a table with two columns: Field and Value). A sidebar on the left shows a house icon with a lock and the text "ACEP Internal Use".

2. This displays the **Edit metadata** page where you can change the metadata of the dataset. After making changes, click the **Update Dataset** button at the bottom of the form.

- To delete the dataset, click the **Delete** button at the bottom of the form.

NOTE: Deleting a dataset does not remove it completely from the database. The url of the deleted dataset will not be able to be reused until it has been purged by a sysadmin.

3. To edit the resources or add more resources, click on the **Resources** tab.

- To delete a resource, select it from the list and then click the **Delete** button at the bottom of the page.

Adding a Dataset to a Group

1. Navigate to the dataset page and click on the **Groups** tab.
2. Select a group from the dropdown menu and click the **Add to group** button.
3. To remove the dataset from a group, hover your cursor over the group and click the **Re-**

The screenshot shows the ACEP Internal Use website interface. At the top, there's a navigation bar with links for Datasets, Organizations, Groups, About, and FAQ, along with a search bar. The main content area shows the 'Alaska Railroad Features' organization profile. On the left, there's a sidebar with a house icon and a lock icon. The main panel has tabs for Dataset and Groups. Under the Groups tab, there's a list of groups, with one group, 'Power Systems Integration', circled in red. Next to this group is a red 'Remove' button.

move button.

Creating a New Group

Groups are a good way to group together datasets that are connected. You may want to create groups for common research themes, funding organizations, or projects.

1. Click on the **Groups** tab at the top of the screen.

The screenshot shows a web browser window with the ACEP (Alaska Center for Energy and Power) logo at the top left. The top navigation bar includes links for Datasets, Organizations, Groups (which is highlighted in blue), About, and FAQ. Below the navigation, a breadcrumb trail shows the user is at the home page / Groups / Create a Group. The main content area has a title 'Create a Group'. On the left, there is a sidebar with a section titled 'What are Groups?' containing text about using CKAN Groups to manage datasets. The main form area has fields for 'Name' (set to 'My Group'), 'Description' (with placeholder text 'A little information about my group...'), and 'Image' (with 'Upload' and 'Link' buttons). A note at the bottom of the form states '* Required field'.

2. Click the **Add Group** button.
3. Enter the information for the group. Find a logo or simple image to upload to represent the group.
4. Once you have entered the information, click the **Create Group** button at the bottom of the form.

3 Admin

Guides for admins managing the data catalog.

Giving User Permissions


Users have roles in each organization that give them different permissions.

The roles are:

- **Member:** can see private datasets in the organization
- **Editor:** can add private datasets to the organization and delete datasets from the organization
- **Admin:** can change users' roles in an organization and publish datasets from private to public

To give a user a role in an organization:

1. Click on the **Organizations** tab at the top of the screen and click on the organization you want to add the user to.
2. Click on the **Manage** button in the upper right.

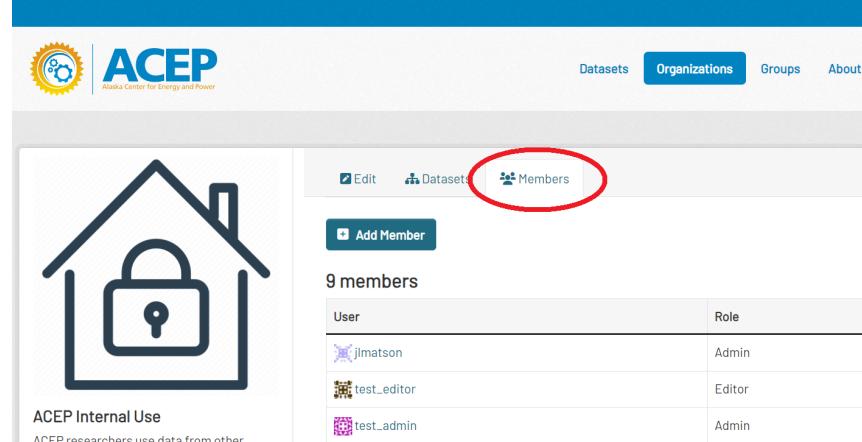

A screenshot of the ACEP data catalog interface. At the top, there's a navigation bar with links for Datasets, Organizations (which is highlighted in blue), Groups, and About. Below the navigation, there's a large icon of a house with a padlock inside it, labeled "ACEP Internal Use" and "ACEP researchers use data from other". To the right of the icon, there's a "Members" tab which is circled in red. Below the tab, there's a "Add Member" button and a table showing "9 members". The table has columns for "User" and "Role". The data in the table is as follows:

User	Role
jmatson	Admin
test_editor	Editor
test_admin	Admin

3. Click on the **Members** tab at the top.

- To add a new member to the organization, click the **Add Member** button. Enter their username, select their new role from the dropdown, and click the **Add Member** button at the bottom of the form.

Existing User : If you wish to add an existing user, search for their username below.

New User : If you wish to add a new user, enter their email address.

Username:

Role: Member

- To change an existing member's role, click the wrench next to their user name.

test_editor	Editor	
-------------	--------	--

- Select their new role from the dropdown menu and click **Update Member**
- To remove the user from the organization completely, click the **Delete** button.

Role: Editor

Delete Update Member

Reviewing and Publishing a Dataset

1. Navigate to the dataset you would like to publish.
2. Review the metadata and ensure the files/links are correct and function properly.
3. To publish, click on the **Manage** button in the top right of the dataset page.

4. In the metadata fields, find the **Visibility** field.

The screenshot shows a form for editing a dataset. At the top, there is a dropdown menu labeled "Organization" with "ACEP Open Data" selected. Below it is a section labeled "Visibility" with three options: "Private" (selected), "Private" (highlighted in blue), and "Public". There is also a "Source" field containing the URL "https://arcg.is/4j5b50".


5. Change the **Visibility** field from **Private** to **Public**, and click the **Update Dataset** button at the bottom of the form.

Deleting Datasets/Groups/Organizations

1. To delete a dataset, group, or organization, navigate to its page and click the **Manage** button in the upper right.
2. Click the **Delete** button at the bottom of the form to delete.
3. **Deleting a dataset, group, or organization does not remove it from the database.** After deleting, a sysadmin can restore the item or purge it to remove it from the database. If not purged, the url for the deleted item cannot be reused.

Purge Deleted Datasets/Groups/Organizations

1. Navigate to sysadmin settings by clicking the hammer icon at the top of the page.

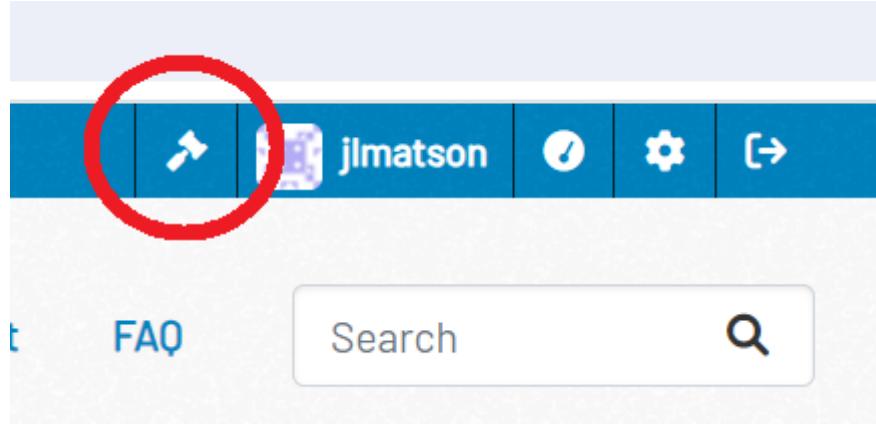

2. Click on the **Trash** tab. This page will list all the currently deleted datasets, groups, and

The screenshot shows the ACEP web application interface. At the top, there is a navigation bar with links for Datasets, Organizations, Groups, About, FAQ, and a search bar. Below the navigation bar, a user profile for 'jimatson' is displayed. The main content area is titled 'Trash' and contains instructions: 'Purge deleted datasets, organizations or groups forever and irreversibly.' A red circle highlights the 'Trash' tab in the top navigation bar. On the right side of the trash page, there are three sections: 'Deleted datasets' (listing 'Avalanche Zones' with a 'Purge' button), 'Deleted organizations' (listing none), and 'Deleted groups' (listing 'ARCTIC Program' with a 'Purge' button). A 'Purge all' button is located at the top right of the trash page.

organizations.


3. You can purge all deleted items using the **Purge all** button at the top of the form. To purge only one group of items (datasets, group, or organizations) use the **Purge** button in that section.

Restore Deleted Datasets

1. Navigate to sysadmin settings by clicking the hammer icon at the top of the page.

The screenshot shows the ACEP web application interface. At the top, there is a navigation bar with links for Datasets, Organizations, Groups, About, FAQ, and a search bar. Below the navigation bar, a user profile for 'jimatson' is displayed. A red circle highlights the hammer icon in the top navigation bar, which is part of the sysadmin settings. On the left side of the page, there are links for 't' (likely 'Logout'), 'FAQ', and a search bar. On the right side, there are icons for a gear (Settings) and a right-pointing arrow (Logout).

2. Click on the **Trash** tab. This page will list all the currently deleted datasets, groups, and organizations.

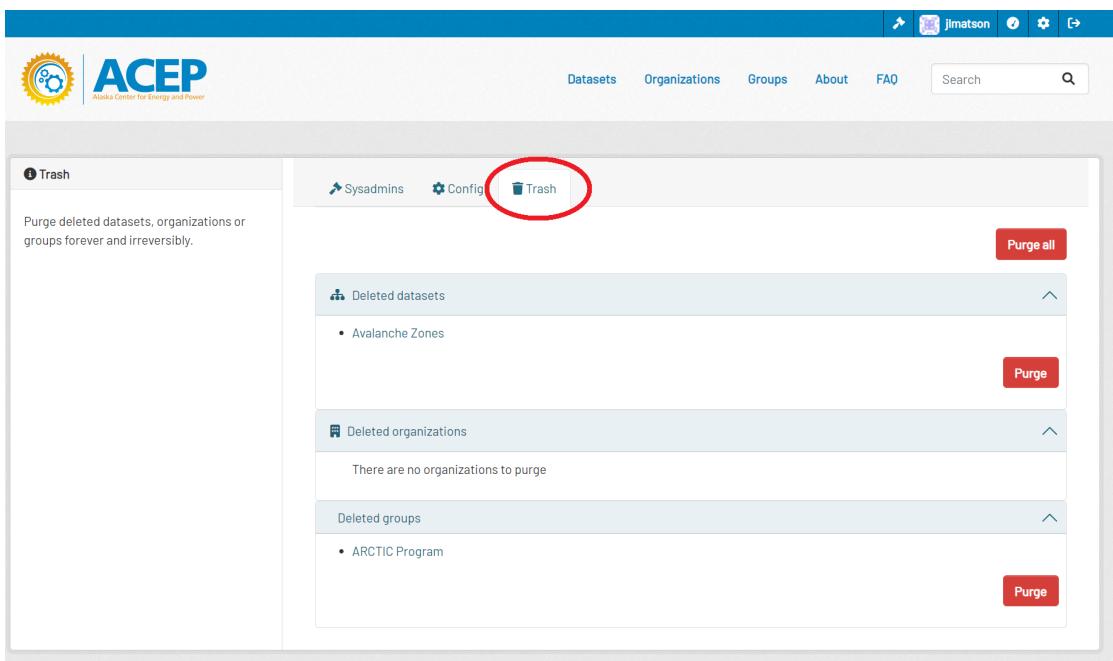

3. Click on the dataset you would like to restore, and click the **Manage** button in the upper right.

Visibility:

Private

State:

Deleted

Source:

<http://example.com/dataset.json>

4. In the metadata fields find the **State** field.
5. Change the **State** field from **Deleted** to **Active**, and then click the **Update Dataset** button at the bottom of the form.

Restoring a Deleted User

When a user is deleted from the website, their information remains in the database with the `state` field set to `deleted`. To reactivate the user, you must set this field to `active` in the database.

1. Enter the `acep-db-cont` docker container

- `> docker exec -it acep-db-cont /bin/bash`

2. Access the postgres database

- `> psql -U postgres`

3. List all the databases and connect to the `ckandb` database.

- `> \l`
- `> \c ckandb`

4. List all the tables and list the columns of the user table.

- `> \d`
- `> \d user`

5. List all the users in the user table.

- `> SELECT * FROM public.user;`

6. Find the deleted user with the username [username].

- `> SELECT id, name, email, state FROM public.user WHERE name = '[username]';`

7. Update the user's state field.

- `> UPDATE public.user SET state = 'active' WHERE name = '[username]';`

8. Find the user again and ensure that the state field is set to active.

- `> SELECT id, name, email, state FROM public.user WHERE name = '[username]';`

Metadata Walkthrough

A detailed walkthrough of the metadata fields available.

Dataset Fields

Title

A descriptive title for the dataset.

Description

A free-form description of the dataset.

Keywords

Keywords that describe the dataset.

Standardized vocabulary TBD

Contact Points

Relevant contact information for the dataset. This includes the following roles:

- **Creator:** primarily responsible for the content of the dataset
- **Contributor:** has made contributions to the dataset
- **Editor:** has helped prepare the dataset for publication

License

A legal document under which the dataset is made available.

Organization

The organization the dataset falls under, either ACEP Internal Use, or ACEP Open Data.

Visibility

The visibility of the dataset: private for internal use or under-review datasets and public for reviewed/published datasets.

Publisher

If the entity responsible for the dataset is ACEP, select ACEP (default) from the dropdown menus. The assigned default value will be displayed. If the publisher is an entity other than ACEP, or if you would like to enter a custom value for one of the fields, select Other and enter information into the provided text box.

Landing Page

A webpage where one can gain access to the dataset or more information about the dataset.

Release Date

Enter the date of the dataset's entry to the data catalog.

Modification Date

Enter the most recent date of change to the dataset.

Version

An indicator of the version of the dataset.

Version Notes

A description of changes between the current and previous verion of the dataset.

Identifier

A unique identifier of the dataset.

Provenance

The origin and history of the dataset. Include the filename of a README or other narrative document that describes the origin of the data and the processing steps employed to get to this posted version. Optionally include changes of ownership, custody, or responsibility. If brief, this information can be included in this free text field instead of in a separate document. More info: <https://www.go-fair.org/fair-principles/r1-2-metadata-associated-detailed-provenance/>

Type

The nature or genre of the dataset.

Temporal Coverage

The temporal period(s) covered by the dataset. Enter the begin and end dates for the temporal period(s) covered by the dataset. If there is a period of missing or suspect data in the dataset, you can enter it as a separate temporal coverage and make a comment in the Notes section to explain the issue.

Spatial Coverage

The geographical area(s) covered by the dataset

Language

The language(s) of the dataset.

Documentation

A page or document about the dataset.

Conforms to

An established standard to which the dataset conforms.

Is referenced by

A related resource that references, cited, or otherwise points to the dataset.

URI

Resource Fields

Name

A descriptive name for the resource.

Description

A free-form description of the resource.

Format

The file format of the resource. This can be detected automatically.

GitHub Repo

If the resource is a link to a GitHub repository, select True. This will allow the addition of a GitHub repository view that displays the repository's statistics.

Status

The current stage of the resource in the workflow.

License

A legal document under which the resource is made available.

Access URL

A URL where one can access the resource.

Download URL

A URL where one can download the resource.

Release Date

The date of formal issuance/publication of the resource.

Modification Date

The most recent date of change/update/modification to the resource.

Language

The language(s) of the metadata or textual values of the resource.

Documentation

A page or document about the resource.

Conforms to

An established standard to which the resource conforms.

Access Services

A data service that gives access to the resource.

URI


For Developers

Documentation of the development of the ACEP Data Catalog.

GitHub repository for the main Data Catalog site: <https://github.com/UAF-RCS/acepportal-ckan>

For more information and guides, visit the official [CKAN Documentation](#)

Data Sources Overview

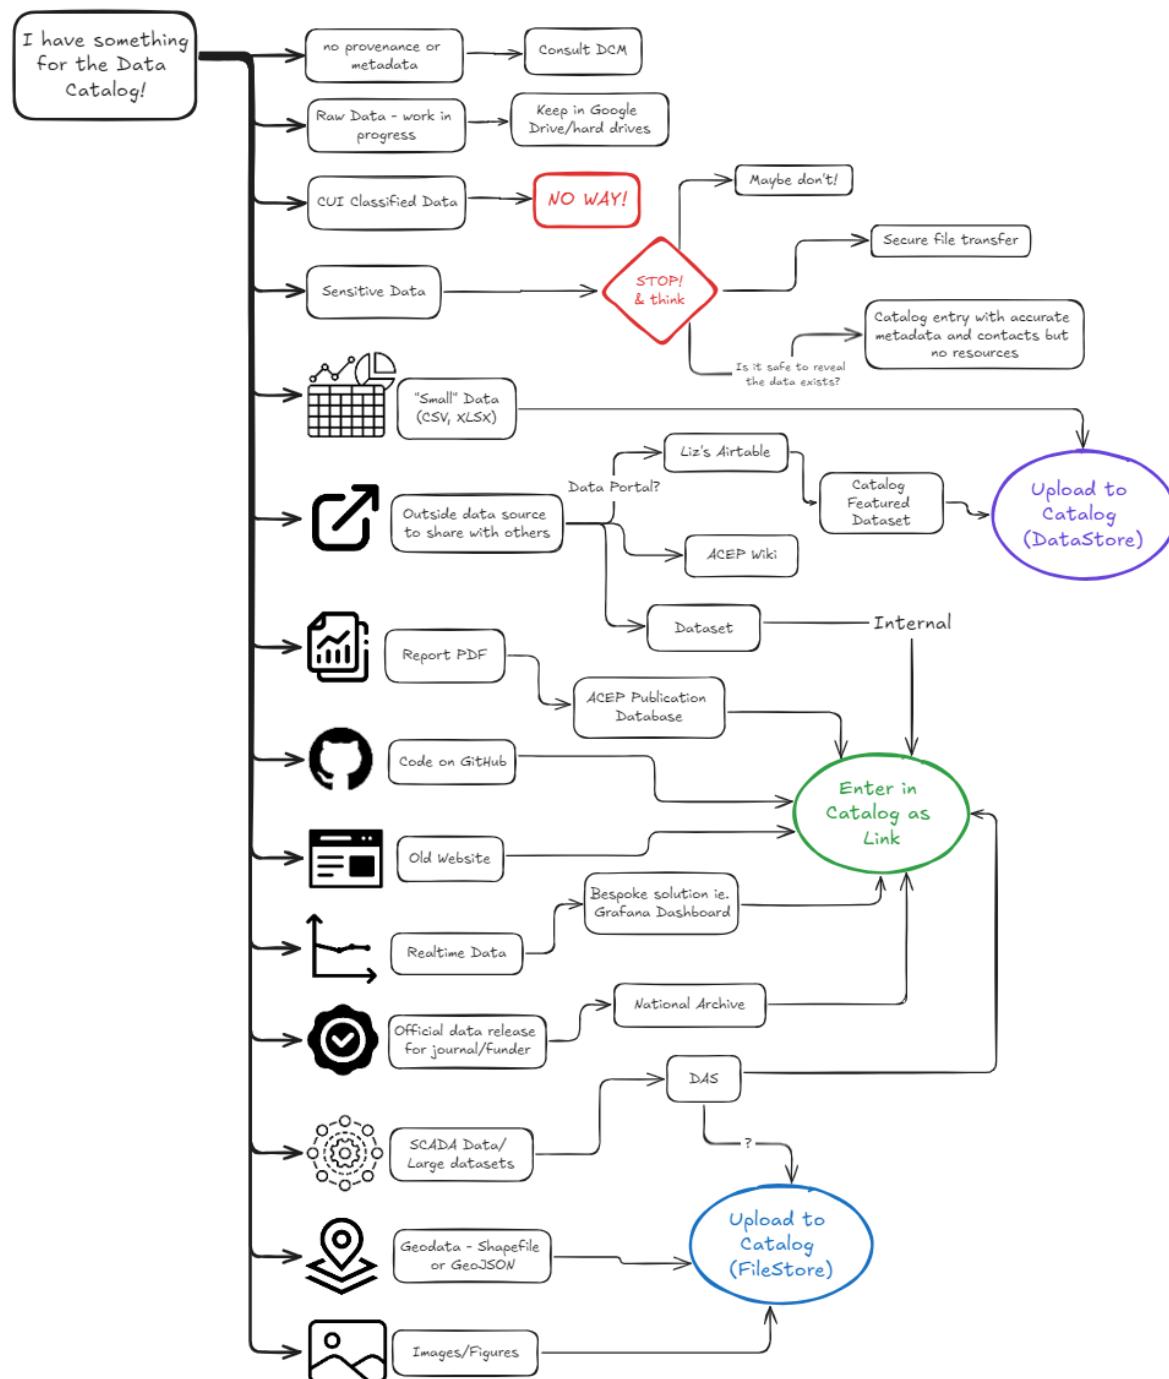

Developing the Data Catalog

The ACEP Data Catalog is run on a VM hosted by RCS. Extensions can be updated by pushing to the aceportal-ckan GitHub repository. After pushing, changes take ~30 min to update on the main site.

Basic Docker Commands

List all running containers:

- `docker ps -a`

There are 5 containers that run the data catalog

- `acep-ckan-cont`
- `acep-db-cont`
- `acep-redis-cont`
- `acep-solr-cont`
- `acep-datapusher-cont`

Spin up Application

- `docker compose up`

This will turn the terminal into an output stream for the docker containers.

TIP: I recommend keeping two terminals open: one for the output stream so you can see errors, and another to run other commands in

Rebuild and spin up containers:

- `docker compose up -d --build`

Run this command after installing a new extension and adding it to the `.env` file.

Go into container:

- `docker exec -it [container_name] /bin/bash`

Or if bash is not installed in the container:

- `docker exec -it [container_name] /bin/sh`

Or if in a bash terminal:

- `docker exec -it [container_name] bash`

Restart a container:

- `docker restart [container_name]`

Restart the `acep-ckan-cont` container after making changes to non-HTML files. Changes in html files can be seen by refreshing the webpage.

Take Down Application

- `docker compose down`

Clean up Project

- `docker compose down --rmi all -v --remove-orphans`

This removes all containers, images, and volumes associated with a project. **Only do this if you want to clean up your environment and reset the containers.**

Creating a Local Instance

Creating a local version of the data catalog is a useful tool for developing and testing new features.

1. Install Docker: <https://www.docker.com/get-started/>
2. Clone the ACEP CKAN repository from Github: <https://github.com/UAF-RCS/acepportal-ckan.git>
3. Create the `.env` file inside the main `acepportal-ckan` folder. Copy the contents from the `.env.example` file.
4. Specify the location of the source files, storage files, backups, etc. in the `.env` file. You will move those files to these locations in the next steps. For example:

```
# CKAN Mounts Directory
CKAN_EXTENSIONS_MOUNT=./ckan-extension
SRC_EXTENSIONS_PATH=/srv/app/src_extensions
CKAN_SOURCE_MOUNT=./ckan-src/src
CKAN_STORAGE_MOUNT=./ckan-src/storage
CKAN_INI_MOUNT=./ckan-src/ckan.ini
```

5. To create a replica of the current main Data Catalog, copy over the source files, storage files, `ckan.ini` file, and database backups from the VM. These files are located on the VM inside `/opt/ckan/backups`. Use `scp` to copy the files onto your machine. These backups are created everyday: replace `[date]` with the most recent date in the format `yyyymmdd`.

Inside of `acepportal-ckan/ckan-src` run the following

- `scp user@portal.lab.acep.uaf.edu:/opt/ckan/backups/app_[date].tar.bz2`
- `scp user@portal.lab.acep.uaf.edu:/opt/ckan/backups/app_storage_[date].tar.bz2`
- `scp user@portal.lab.acep.uaf.edu:/opt/ckan/acepportal-ckan/ckan-src/ckan.ini`

6. Use tar to decompress the source and storage tar files

- `tar -jxvf app_[date].tar.bz2`
- `tar -jxvf app_storage_[date].tar.bz2`

Decompressing the `app_storage` tar file should create a folder called `ckan` containing the folders `resources`, `storage`, and `webassets`. Rename the `ckan` folder to `storage`. This should result in the directory structure specified in `ckan-src/README.txt`

7. Create a backups folder alongside the `acepportal-ckan` repository on your machine. Specify the name in the `BACKUP_TO` setting in the `.env` file.

```
# Backups
BACKUP_TO=.../.../[backups folder name]
```

8. Run the following commands inside the backups folder to copy over the database and datastore.

- `scp user@portal.lab.acep.uaf.edu:/opt/ckan/backups/ckandb_[date].tar`
- `scp user@portal.lab.acep.uaf.edu:/opt/ckan/backups/datastore_[date].tar`
- `scp user@portal.lab.acep.uaf.edu:/opt/ckan/backups/resource_[date].tar`

9. Inside of the `ckan.ini` file, set the `ckan.site_url` setting to the localhost url as so:

```
ckan.site_url = http://127.0.0.1:5000
```

10. Build the containers using,

- `docker compose up`

11. Once the containers are up, use the `import_database.sh` bash script to import the database.

- `bash import_database.sh`

12. Rebuild the CKAN search index.

- `docker exec -it acep-ckan-cont /bin/bash`
- `cd /srv/app`
- `ckan search-index rebuild`

Create a New Extension

1. Enter the acep-ckan-cont Docker container
 - `docker exec -it acep-ckan-cont /bin/bash` and run the following command
 - `ckan generate extension -o /srv/app/src/ckan-extension` This will create an extension in the `ckan-extension` folder which can be edited outside of the container.
2. Add the extension name to the `CKAN_PLUGINS` list in the `.env` file.
3. Run `docker compose up -d --build ckan`

Install an Extension

1. Ensure that the extension supports CKAN 2.10.4 and Python 3.10. Clone the extension repository into the `ckan-extension` folder.
2. Ensure that all dependencies for the extension are listed in `requirements.txt` or a similar file.
3. Add the extension name to the `CKAN_PLUGINS` list in the `.env` file.
4. Run `docker compose up -d --build ckan`

Updating the Main Site

To add a feature from your local instance to the main Data Catalog,

1. Push the files to the acepportal-ckan GitHub repository.
2. Wait about 30 min. for the changes to be pulled to VM.
3. If you have added a new extension, SSH into the VM and add the extension name to the `.env` file.
 - `ssh user@portal.lab.acep.uaf.edu`
 - `cd /opt/ckan/acepportal-ckan`
 - `vi .env`
4. After installing new extensions or making other changes, you may need to restart the `acep-ckan-cont` container to make them take effect. Inside the VM, run
 - `docker restart acep-ckan-cont`

Extensions

Currently Installed

<https://github.com/UAF-RCS/aceportal-ckan/tree/main/ckan-extension>

ckanext-customtheme

Author: Jenae Matson

Purpose: Add custom theming and features for the CKAN instance, including

- ACEP logos, colors, and fonts
- Home page layout, images, and featured dataset
- Changed font weight of Register button
- Added tags to search page display
- HTML file for About page text
- Removed social media links from dataset/resources pages
- Added support contact info to dataset sidebar
- Added default blank option to add-to-group dropdown menu

Configuration Settings:

- `ckan.customtheme.featured_dataset = alaska-energy-inventory`

ckanext-dcat

Link: <https://github.com/ckan/ckanext-dcat>

Purpose: Rework metadata to conform to DCAT standard.

Configuration Settings:

- `ckanext.dcat.rdf.profiles = euro_dcat_ap_3`

Modifications:

- The file `schemas/acep_dcat_fields.yaml` was created to define the metadata fields for the catalog.
- The file `templates/scheming/form_snippets/publisher.html` was created to define the dynamic dropdown menu in the Publisher metadata field.

ckanext-faqpage

Author: Jenae Matson

Purpose: Create an FAQ page linked in the masthead with collapsible boxes for questions and answers.

ckanext-geoview

Link: <https://github.com/ckan/ckanext-geoview>

Purpose: Created resource views for geojson and other geo-data file types. We have implemented the OpenLayers Viewer.

Configuration Settings:

- ckanext.geoview.ol_viewer.default_feature_hoveron = true

ckanext-githubrepopreview

Link: <https://github.com/DataShades/ckanext-githubrepopreview>

Purpose: Provide a view for GitHub repository resources.

Modifications: This extension was created for an older version of CKAN, so the following changes were made to make it work with version 2.10:

- In the file `plugin.py`, replace the line `from lib import parse` with the following

```
from urllib.parse import urlparse

def parse(input_url, some_flag):
    parsed_info = {}
    parsed_url = urlparse(input_url)
    domain = parsed_url.netloc
    path_parts = parsed_url.path.strip('/').split('/')

    parsed_info['domain'] = domain
    parsed_info['owner'] = path_parts[0] if len(path_parts) > 0 else None
    parsed_info['repo'] = path_parts[1] if len(path_parts) > 1 else None

    return parsed_info
```

- In the file `templates/githubrepo.html`, delete the following lines

```

{%- block styles %}
    {% resource g.main_css[6:] %}

{%- endblock %}

{%- block scripts %}
    {% resource 'base/main' %}
    {% resource 'base/ckan' %}
    {% if g.tracking_enabled %}
        {% resource 'base/tracking.js' %}
    {% endif %}
{%- endblock -%}

```

ckanext-ldap

Link: <https://github.com/NaturalHistoryMuseum/ckanext-ldap>

Purpose: Allows users to login using their UA credentials (a temporary solution while the official SSO is being implemented).

Configuration Settings:

- ckanext.ldap.uri = ldaps://auth.alaska.edu
- ckanext.ldap.auth.password = s3arch@ccount!
- ckanext.ldap.base_dn = ou=userAccounts,dc=ua,dc=ad,dc=alaska,dc=edu
- ckanext.ldap.search.filter = (sAMAccountName={login})
- ckanext.ldap.auth.dn = cn=rcs-ad-read,ou=RCS,ou=UAF,dc=ua,dc=ad,dc=alaska,dc=edu
- ckanext.ldap.username = sAMAccountName
- ckanext.ldap.fullname = displayName
- ckanext.ldap.email = mail
- ckanext.ldap.ckan_fallback = True

Modifications: Theng from RCS has made some modifications, including improving user creation to handle existing accounts: <https://github.com/UAF-RCS/aceportal-ckan/tree/main/ckan-extension/ckanext-ldap>.

ckanext-package-group-permissions

Link: <https://github.com/salsadigitalauorg/ckanext-package-group-permissions>

Purpose: Allows all editors and admins to add datasets to any group, without having to be added as members to each group.

Modifications: This extension was created and works with CKAN 2.9. This instance is version 2.10, so the extension requires some small modifications to work. The following changes were made to the original extension:

- In the file `plugin.py`, change the `member_create` function to the following

```
def member_create(self, next_auth, context, data_dict):  
    """  
    This code is largely borrowed from /src/ckan/ckan/logic/auth/create.py  
    With a modification to allow users to add datasets to any group  
    :param context:  
    :param data_dict:  
    :return:  
    """  
  
    group = logic_auth.get_group_object(context, data_dict)  
  
    authorized = False  
    if not group.is_organization and data_dict.get('object_type') == 'package':  
        authorized = helpers.user_has_admin_access(include_editor_access=True)  
  
    if not authorized:  
        # Fallback to the default CKAN behaviour  
        return next_auth(context, data_dict)  
    else:  
        return {'success': True}
```

- In the the file `templates/package/group_list.html`, add the line `{ h.csrf_input() }` to the beginning of the two post forms, as follows

```
{% if groups %}  
<form class="add-to-group" method="post">  
    {{ h.csrf_input() }}  
    ...  
</form>  
{% endif %}
```

```

{% if c.pkg_dict.groups %}
<form method="post">
    {{ h.csrf_input() }}
    ...
{% endif %}

```

ckanext-pdfview

Link: <https://github.com/ckan/ckanext-pdfview>

Purpose: Provide a view for pdf resources.

ckanext-restrictpublish

Author: Jenae Matson

Purpose: Restrict the ability to change the visibility of a dataset to admins only. Datasets posted by editors default to private.

ckanext-scheming

Link: <https://github.com/ckan/ckanext-scheming>

Purpose: Allows for the creation of alternate metadata templates (schemas) defined by .yaml or .json files.

Configuration Settings:

- scheming.dataset_schemas ckanext.dcat.schemas:acep_dcat_fields.yaml
- scheming.presets = ckanext.scheming:presets.json ckanext.dcat.schemas:presets.yaml
- scheming.dataset_fallback = false

Modifications: Some of the automatically calculated resource fields were manually re-added to be displayed. In the file `templates/scheming/package/resource_read.html`, below `{%- block resource_license -%}` add the following

```

{%- block resource_size -%}
<tr>
    <th scope="row">{{ _('Size') }}</th>
    <td>{{ res.size or _('unknown') }} bytes</td>
</tr>
{%- endblock -%}

```

```

{%- block resource_datastore -%}
<tr>
    <th scope="row">{{ _('Datastore active') }}</th>
    <td>{{ res.datastore_active or _('unknown') }}</td>
</tr>
{%- endblock -%}

```

ckanext-xloader

Link: <https://github.com/ckan/ckanext-xloader>

Purpose: Improve data uploading, including increasing allowed file sizes.

Configuration Settings:

- ckanext.xloader.jobs_db.uri=postgresql://ckandbuser:ckandbpassword@db/ckandb

Adding Alternate Schemas with ckanext-scheming

1. Create a .yaml or .json file in the folder `ckanext-scheming/ckanext/scheming` to define the metadata schema. See extension documentation for more information and examples.
2. In `ckan.ini`, add your schema(s) to the `scheming.dataset_schemas` config option. For example:

```
scheming.dataset_schemas = ckanext.scheming:arctic_dataset.json ckanext.scheming:geo_dataset
```

3. The new dataset creation form is located at a url defined by the schema type name. For example, the creation form for datasets of type `arctic-dataset` is located at `/arctic-dataset/new`. You can define a new Add Dataset button using this new url.

Attempted Extensions

ckanext-spatial

Link: <https://github.com/ckan/ckanext-spatial>

Purpose: This extension adds the ability to search for datasets on a map widget, as well as a dataset extent map widget on the dataset page, provided correct geospatial metadata.

Problems: This extension is not currently installed due to the following,

- Configuring map tiles for ckanext-spatial caused the map tiles for ckanext-geoview to disappear.
- Datasets with the required spatial metadata were not searchable on the map search widget, although the dataset extent widet worked correctly.

ckanext-oidc-pkce

Link: <https://github.com/DataShades/ckanext-oidc-pkce/tree/master>

Purpose: This extension allows for users to be authenticated through an external application when they login.

Problems: Ideally users on the ACEP Data Catalog would be able to login using their UA login credentials through Google Authentication. This extension installs correctly, but does not seem to support Google Authentication.