


Git – Lab 02


1. Create a remote "repository" with project name cloudethix_git_yourname. Create one file named demo.txt in the master branch of the remote repository. Once a file is created, clone the repository locally. On the local repository create 3 branches: feature/login and feature/mainline, release. Add login.txt file to feature/login branch and push that branch to remote repository. Create PR and approve the PR and then merge the feature/login branch to the remote master branch.

Step 1: Create a remote "repository" with project name cloudethix_git_yourname.

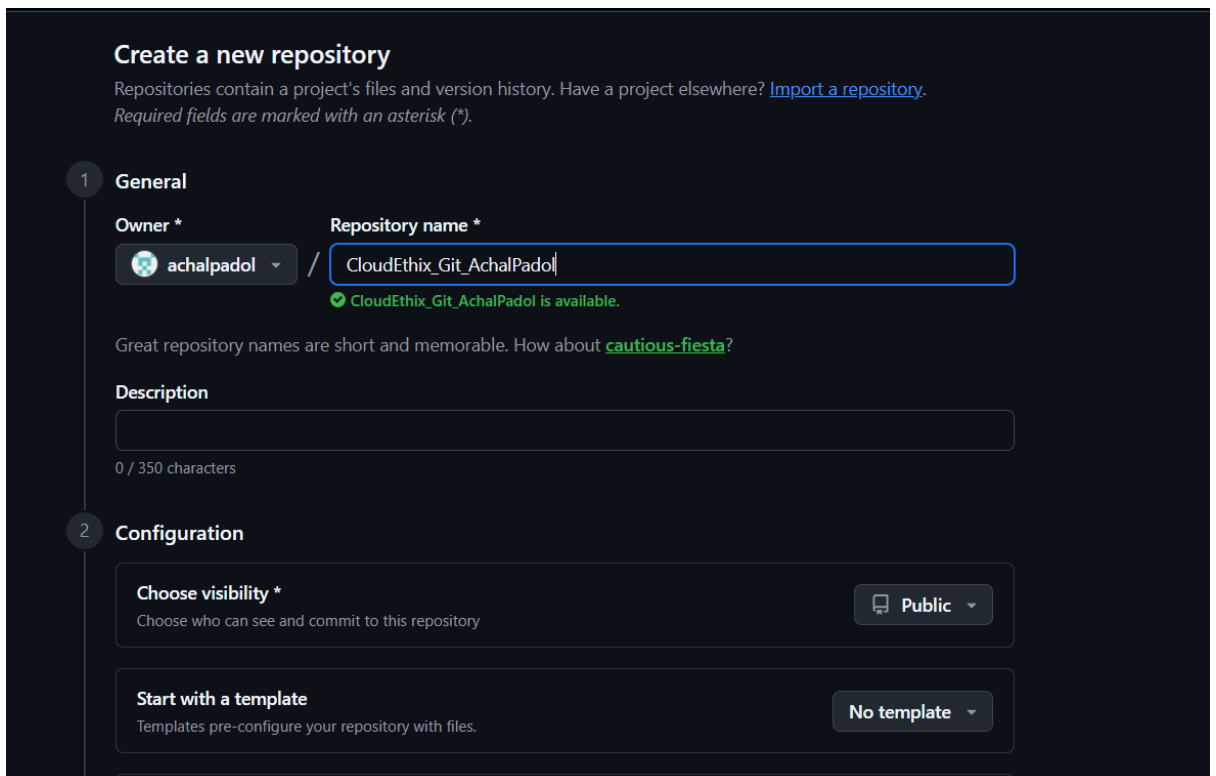

The screenshot shows the 'Create a new repository' page on GitHub. The 'General' tab is active, showing the 'Owner' as 'achalpadol' and the 'Repository name' as 'CloudEthix_Git_AchalPadol'. A green checkmark indicates the name is available. The 'Description' field is empty. The 'Configuration' section shows 'Choose visibility' set to 'Public' and 'Start with a template' set to 'No template'.

Step 2: Create one file named demo.txt in the master branch of the remote repository.

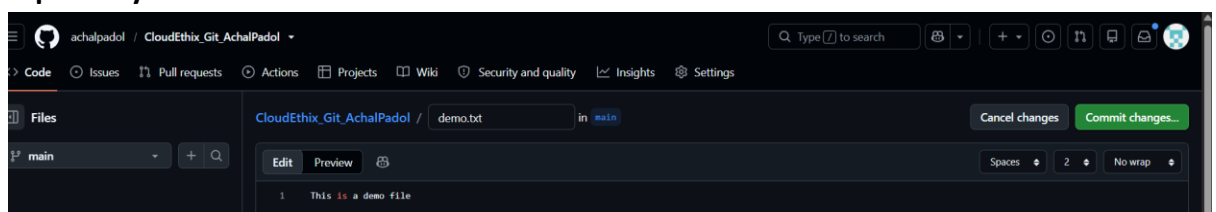

Step 3: Once a file is created, clone the repository locally.

```
root@LAPTOP-HPUOTJF1:~# mkdir clone-remote-repo
root@LAPTOP-HPUOTJF1:~# cd clone-remote-repo/
root@LAPTOP-HPUOTJF1:~/clone-remote-repo# git clone https://github.com/achalpadol/CloudEthix_Git_AchalPadol.git
Cloning into 'CloudEthix_Git_AchalPadol'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.
root@LAPTOP-HPUOTJF1:~/clone-remote-repo#
```


Step 3: On the local repository create 3 branches: feature/login and feature/mainline, release. Add login.txt file to feature/login branch and push that branch to remote repository.

```
root@LAPTOP-HPU0TJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git branch
* main
root@LAPTOP-HPU0TJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git checkout -b feature/login
Switched to a new branch 'feature/login'
root@LAPTOP-HPU0TJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# touch login.txt
root@LAPTOP-HPU0TJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git status
On branch feature/login
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    login.txt

nothing added to commit but untracked files present (use "git add" to track)
root@LAPTOP-HPU0TJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git branch feature/mainline
root@LAPTOP-HPU0TJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git branch release
root@LAPTOP-HPU0TJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git branch
* feature/login
  feature/mainline
  main
  release
root@LAPTOP-HPU0TJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# |
```

Step 4: Push feature/login branch to the remote repository.

```
create mode 100644 login.txt
oot@LAPTOP-HPU0TJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git push origin feature/login
Username for 'https://github.com': achalpadol
Password for 'https://achalpadol@github.com':
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 286 bytes | 286.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'feature/login' on GitHub by visiting:
remote:   https://github.com/achalpadol/CloudEthix_Git_AchalPadol/pull/new/feature/login
remote:
To https://github.com/achalpadol/CloudEthix_Git_AchalPadol.git
 * [new branch]      feature/login -> feature/login
oot@LAPTOP-HPU0TJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# |
```

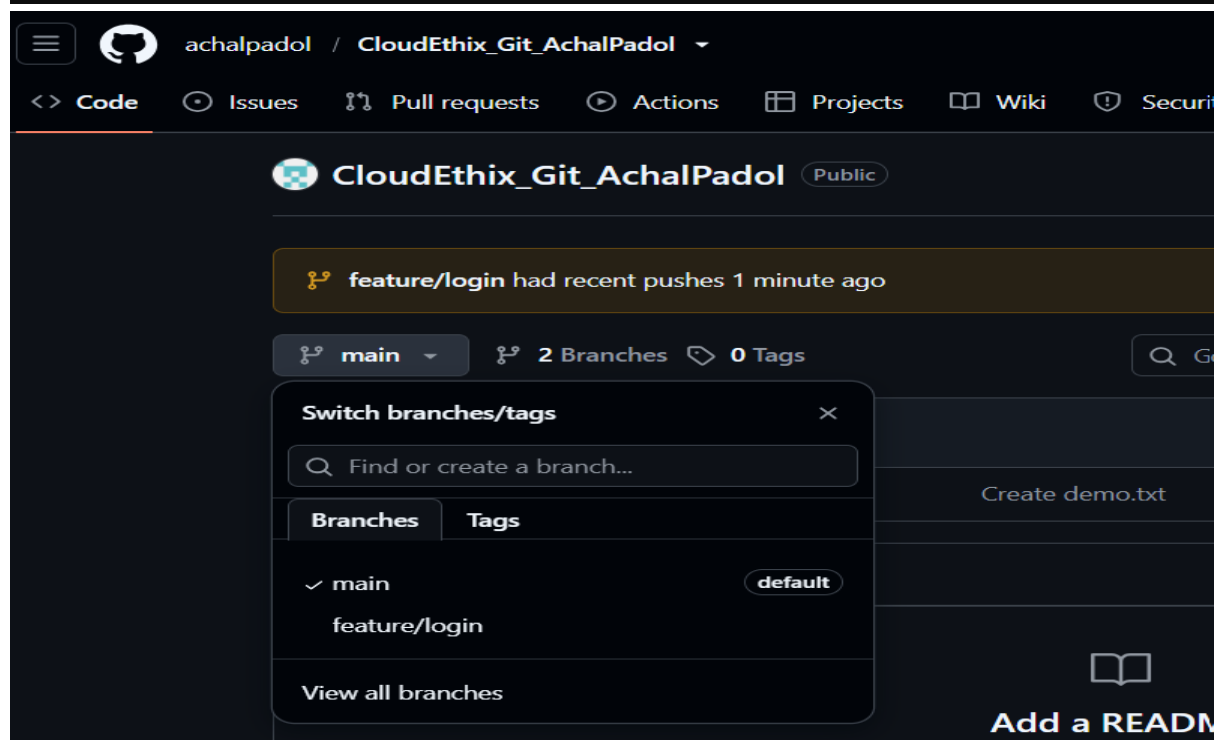

Open a pull request

Create a new pull request by comparing changes across two branches. If you need to, you can also [compare across forks](#). [Learn more about diff comparisons here](#).



base: `main`



compare: `feature/login`

✓ **Able to merge.** These branches can be automatically merged.



Add a title *

File login.txt is added

Add a description

Write

Preview

H

B

I

≡

<>

🔗

📋

📋

📋

📋

📋

📋

📋

📋

📋

📋

📋

Add your description here...

📖 Markdown is supported

📎 Paste, drop, or click to add files

Create pull request

ⓘ Remember, contributions to this repository should follow our [GitHub Community Guidelines](#).

Reviewers

No reviews

Assignees

No one assigned

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Use [Closing keywords](#) to automatically close issues.

Helpful resources

[GitHub Community Guidelines](#)

File login.txt is added #1

🔗 Open

achalpadol wants to merge 1 commit into `main` from `feature/login`



Conversation 0



Commits 1



Checks 0



Files changed 1



achalpadol commented now

Owner

...

No description provided.



File login.txt is added

c5935dc



No conflicts with base branch

Merging can be performed automatically.

Merge pull request




You can also merge this with the command line. [View command line instructions](#).


Still in progress? [Convert to draft](#)



Add a comment

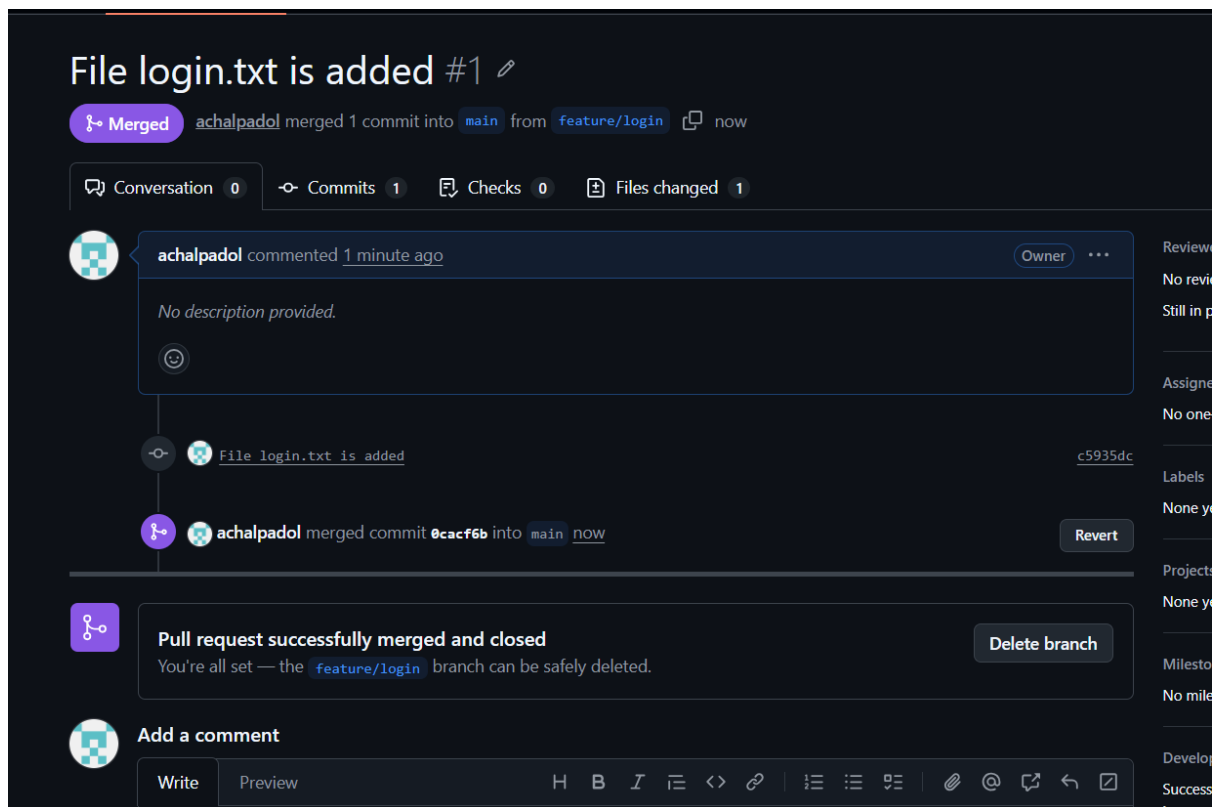

Branch merge is successfully.

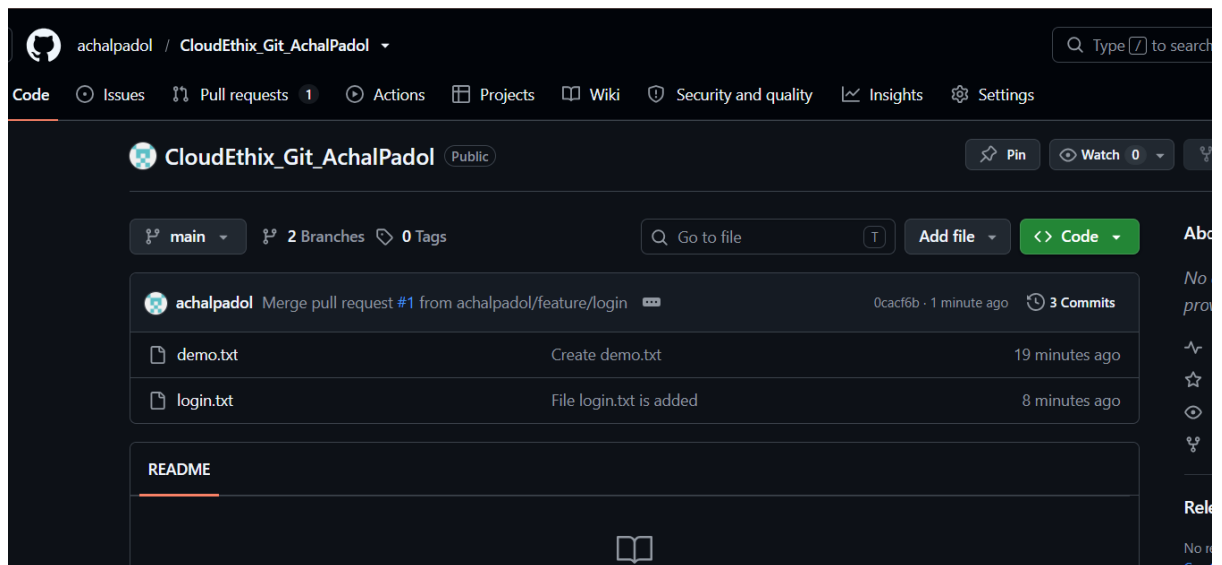


2. Add files to the feature/mainline branch to local repo and push that branch to remote. Then add some files to the feature/mainline remote branch from the UI. Then fetch the latest changes on local feature/mainline with Fetch and Pull command.

Step 1: Add files to the feature/mainline branch to local repo and push that branch to remote.


```

root@LAPTOP-HPUOTJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git checkout feature/mainline
Switched to branch 'feature/mainline'
root@LAPTOP-HPUOTJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# touch file1 file2 file3
root@LAPTOP-HPUOTJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git add .
root@LAPTOP-HPUOTJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git status
On branch feature/mainline
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   file1
        new file:   file2
        new file:   file3
root@LAPTOP-HPUOTJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git commit -m "Added Three files"
[feature/mainline c5e44fa] Added Three files
 3 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 file1
 create mode 100644 file2
 create mode 100644 file3
root@LAPTOP-HPUOTJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git push origin feature/mainline
fatal: unable to access 'https://github.com/achalpadol/CloudEthix_Git_AchalPadol.git/': Could not resolve host: github.com
root@LAPTOP-HPUOTJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git push origin feature/mainline
Username for 'https://github.com': achalpadol
Password for 'https://achalpadol@github.com':
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 287 bytes | 287.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'feature/mainline' on GitHub by visiting:

```

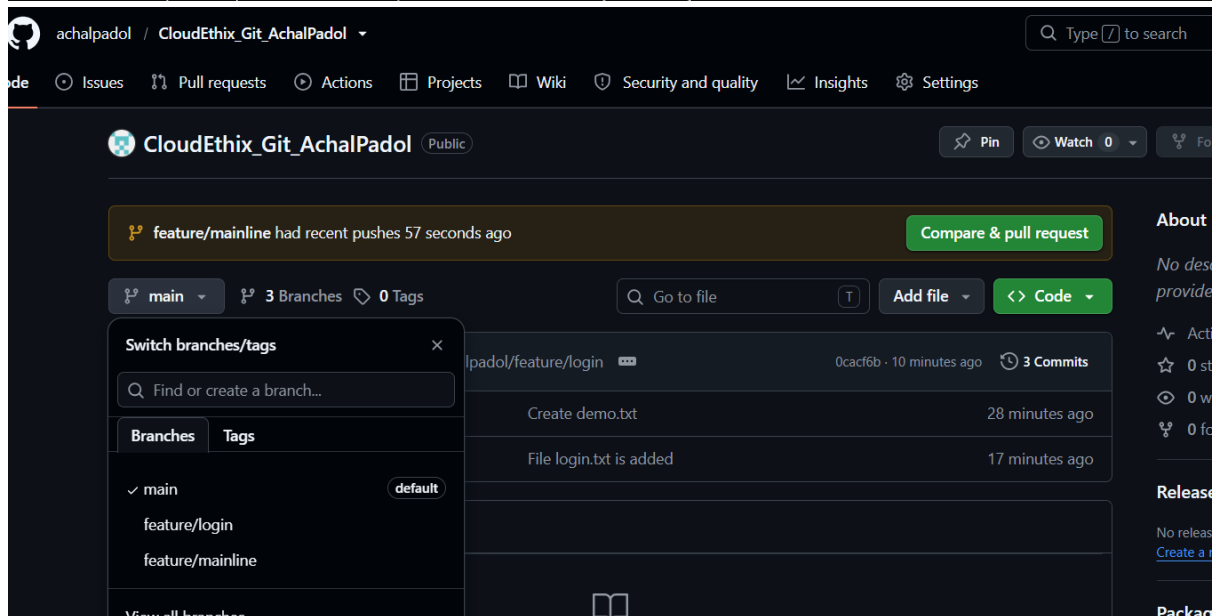

Step 2: Then add some files to the feature/mainline remote branch from the UI.

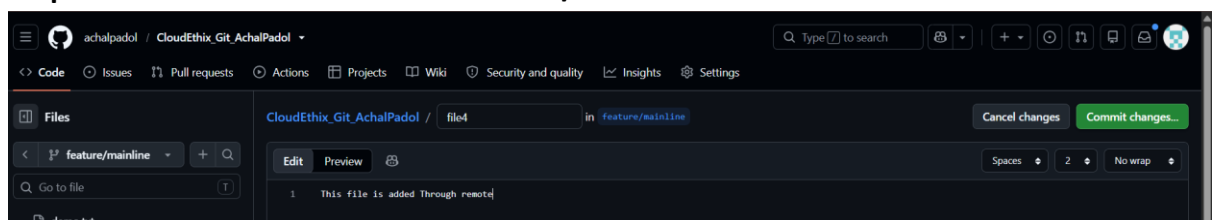

Step 3: Then fetch the latest changes on local feature/mainline with Fetch and pull

```

nd the repository exists.
oot@LAPTOP-HPUOTJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git fetch origin feature/mainline
rom https://github.com/achalpadol/CloudEthix_Git_AchalPadol
* branch
  feature/mainline -> FETCH_HEAD
oot@LAPTOP-HPUOTJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# git pull origin feature/mainline
rom https://github.com/achalpadol/CloudEthix_Git_AchalPadol
* branch
  feature/mainline -> FETCH_HEAD
dating c5e44fa..c79f06a
ast-forward
file4 | 1 +
1 file changed, 1 insertion(+)
create mode 100644 file4
oot@LAPTOP-HPUOTJF1:~/clone-remote-repo/CloudEthix_Git_AchalPadol# |

```

3. Fork below public repository to your account. Then clone the repository locally. Create 2 branches cloud_dev01. Then add cloud_dev02 to that repository locally and hello.txt, moto.txt and world.txt to one branch and add another 3 files to another branch. Then push cloud_dev02 branch to the Forked repository on the remote. [GitHub - ripienaar/free-for-dev: A list of SaaS, PaaS and IaaS offerings that have free tiers of int...](#)

Step 1: Fork below public repository to your account.

The image shows a GitHub repository page for 'free-for-dev' and a terminal window below it. The repository page is for a public repository 'free-for-dev' forked from 'ripienaar/free-for-dev'. It shows the master branch with 2 branches and 0 tags. The repository is 6 commits behind the upstream master. The file list includes .github, .gitignore, AGENTS.md, CLAUDE.md, CNAME, CODE_OF_CONDUCT.md, CONTRIBUTING.md, README.md, and index.html. The terminal window shows the following commands and output:

```
root@LAPTOP-HPUOTJF1:~# ping -c 4 google.com
ping: google.com: Temporary failure in name resolution
root@LAPTOP-HPUOTJF1:~# git clone https://github.com/achalpadol/free-for-dev.git
Cloning into 'free-for-dev'...
remote: Enumerating objects: 16767, done.
remote: Counting objects: 100% (30/30), done.
remote: Compressing objects: 100% (21/21), done.
remote: Total 16767 (delta 24), reused 9 (delta 9), pack-reused 16737 (from 3)
Receiving objects: 100% (16767/16767), 10.06 MiB | 7.12 MiB/s, done.
Resolving deltas: 100% (8915/8915), done.
root@LAPTOP-HPUOTJF1:~# ls
amend_repo  GitIgnore-Repo  Merge_demo  ci-cd-project  free-for-dev  project  stash-demo
devOps_Project  GitWorking  amend-repo  clone-remote-repo  githubaction-project  revert-demo  student-repo
root@LAPTOP-HPUOTJF1:~# cd free-for-dev/
root@LAPTOP-HPUOTJF1:~/free-for-dev# ls
AGENTS.md  CLAUDE.md  CNAME  CODE_OF_CONDUCT.md  CONTRIBUTING.md  README.md  index.html  logo.webp
root@LAPTOP-HPUOTJF1:~/free-for-dev#
```

Step 2: Create 2 branches cloud_dev01. Then add cloud_dev02 to that repository locally and hello.txt, moto.txt and world.txt

```

root@LAPTOP-HPUOTJF1:~/free-for-dev# git branch
* master
root@LAPTOP-HPUOTJF1:~/free-for-dev# git branch cloud_dev_01
root@LAPTOP-HPUOTJF1:~/free-for-dev# git branch cloud_dev_02
root@LAPTOP-HPUOTJF1:~/free-for-dev# git branch
  cloud_dev_01
  cloud_dev_02
* master
root@LAPTOP-HPUOTJF1:~/free-for-dev# git checkout cloud_dev_01
Switched to branch 'cloud_dev_01'
root@LAPTOP-HPUOTJF1:~/free-for-dev# touch hello.txt moto.txt world.txt
root@LAPTOP-HPUOTJF1:~/free-for-dev# git status
On branch cloud_dev_01
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        hello.txt
        moto.txt
        world.txt

nothing added to commit but untracked files present (use "git add" to track)
root@LAPTOP-HPUOTJF1:~/free-for-dev# git add .
root@LAPTOP-HPUOTJF1:~/free-for-dev# git commit -m "Three files are added"
[cloud_dev_01 b040c197] Three files are added
 3 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 hello.txt
 create mode 100644 moto.txt
 create mode 100644 world.txt
root@LAPTOP-HPUOTJF1:~/free-for-dev#
root@LAPTOP-HPUOTJF1:~/free-for-dev# git branch
* cloud_dev_01
  cloud_dev_02
  master
root@LAPTOP-HPUOTJF1:~/free-for-dev# git checkout cloud_dev_02
Switched to branch 'cloud_dev_02'
root@LAPTOP-HPUOTJF1:~/free-for-dev# touch file1.txt file2.txt file3.txt
root@LAPTOP-HPUOTJF1:~/free-for-dev# git add .
root@LAPTOP-HPUOTJF1:~/free-for-dev# git commit -m "Adding Three file to the cloud_dev_02 branch"
[cloud_dev_02 6f2963a2] Adding Three file to the cloud_dev_02 branch
 3 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 file1.txt
 create mode 100644 file2.txt
 create mode 100644 file3.txt
root@LAPTOP-HPUOTJF1:~/free-for-dev#

```

Step 3: Then push cloud_dev02 branch to the Forked repository on the remote.


```

root@LAPTOP-HPUOTJF1:~/free-for-dev# git push origin cloud_dev_02
Username for 'https://github.com': achalpadol
Password for 'https://achalpadol@github.com':
Enumerating objects: 4, done.
Compressing objects: 100% (4/4), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 311 bytes | 311.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
Remote: Resolving deltas: 100% (1/1), completed with 1 local object.
Remote:
Remote: Create a pull request for 'cloud_dev_02' on GitHub by visiting:
Remote:   https://github.com/achalpadol/free-for-dev/pull/new/cloud_dev_02
Remote:
To https://github.com/achalpadol/free-for-dev.git
 * [new branch]      cloud_dev_02 -> cloud_dev_02
root@LAPTOP-HPUOTJF1:~/free-for-dev#

```

4. Create a remote repository `merge_conflict_demo`. Add some files in the remote master branch. Clone the repository locally. Create 2 branches locally named `demo/merge` and `demo/conflicts`. Add a `merge.txt` file in both branches with some data like "Hello CloudEthiX...." And "Fello CloudEthiX...." respectively and commit. Then merge `demo/conflicts` branch to `demo/merge` branch and solve the merge conflicts.

Step 1: Create a remote repository `merge_conflict_demo`.

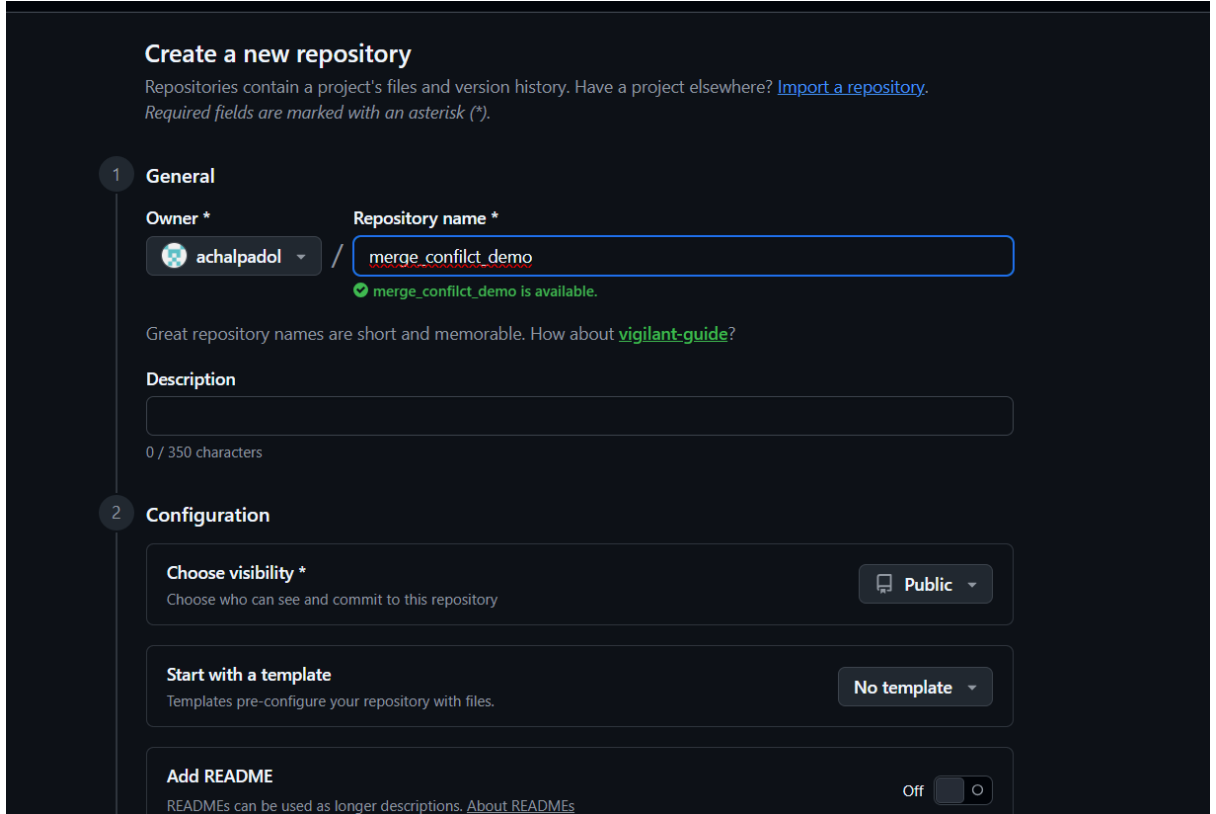

The screenshot shows the 'Create a new repository' page on GitHub. The 'General' tab is selected, showing the repository name 'merge_conflict_demo' and the owner 'achalpadol'. A green checkmark indicates the name is available. The 'Description' field is empty. The 'Configuration' tab is also visible, showing options for visibility (Public), starting with a template (No template), and adding a README (Off).

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1 General

Owner * achalpadol / Repository name * merge_conflict_demo
merge_conflict_demo is available.

Great repository names are short and memorable. How about [vigilant-guide](#)?

Description
0 / 350 characters


2 Configuration

Choose visibility * Public
Choose who can see and commit to this repository

Start with a template No template
Templates pre-configure your repository with files.

Add README Off
READMEs can be used as longer descriptions. [About READMEs](#)

Step 2: Add some files in the remote master branch.

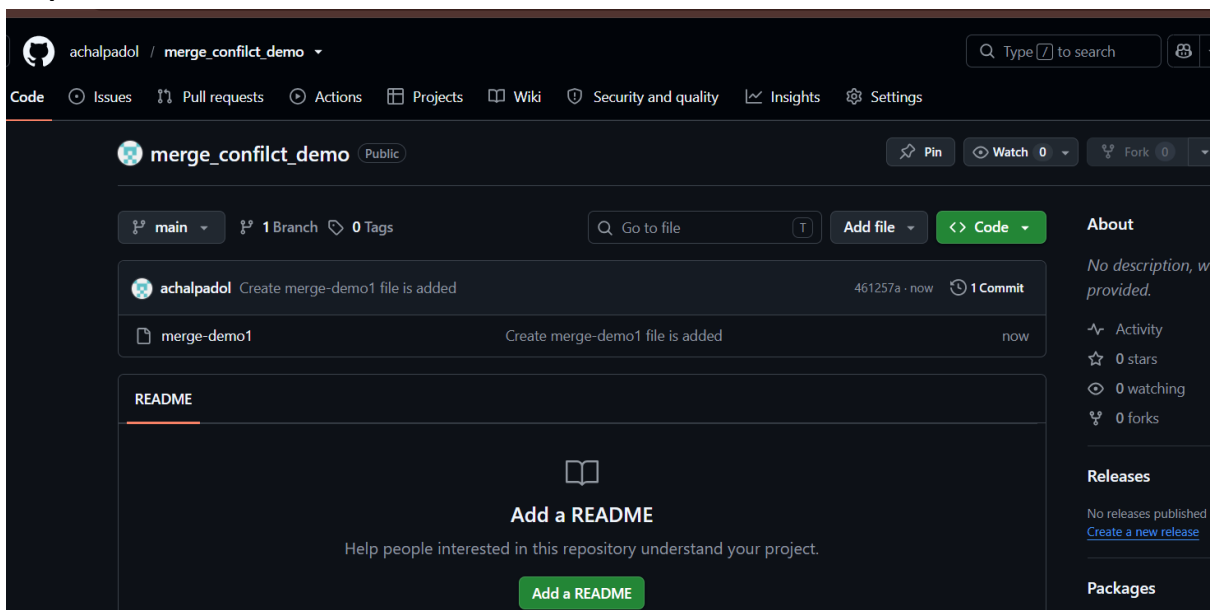

The screenshot shows the GitHub repository page for 'merge_conflict_demo'. The repository is public and has 1 branch (main) and 0 tags. A commit titled 'Create merge-demo1 file is added' is shown. The README section is empty, with a prompt to 'Add a README'. The right sidebar shows the repository's activity, including 0 stars, 0 watching, and 0 forks.

achalpadol / merge_conflict_demo

Code Issues Pull requests Actions Projects Wiki Security and quality Insights Settings

merge_conflict_demo Public Pin Watch 0 Fork 0

main 1 Branch 0 Tags

Go to file

Add file <> Code

achalpadol Create merge-demo1 file is added 461257a · now 1 Commit

merge-demo1 Create merge-demo1 file is added now

README

Add a README
Help people interested in this repository understand your project.
Add a README

About
No description, w provided.
Activity
0 stars
0 watching
0 forks
Releases
No releases published
Create a new release
Packages

Step 3: Clone the repository locally

```
root@LAPTOP-HPUOTJF1:~/free-for-dev# cd
root@LAPTOP-HPUOTJF1:~# git clone https://github.com/achalpadol/merge_confilct_demo.git
Cloning into 'merge_confilct_demo'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.
root@LAPTOP-HPUOTJF1:~# |
```


Step 4: Create 2 branches locally named demo/merge and demo/conflicts.

```
oot@LAPTOP-HPUOTJF1:~# cd merge_confilct_demo/
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# ls
merge-demo1
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# git branch
  main
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# git branch demo/merge
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# git branch demo/conflict
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# git branch
  demo/conflict
  demo/merge
  main
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# |
```

Step 5: Add a merge.txt file in both branches with some data like "Hello CloudEthiX...." And "Fello CloudEthiX...." respectively and commit.

```
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# git checkout demo/merge
Switched to branch 'demo/merge'
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# vim merge.txt
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# git add .
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# git commit -m "merge file is added to the demo/merge branch"
demo/merge 6e7a0fd] merge file is added to the demo/merge branch
1 file changed, 1 insertion(+)
create mode 100644 merge.txt
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# git checkout demo/conflict
Switched to branch 'demo/conflict'
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# vim merge-demo1
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# git add .
oot@LAPTOP-HPUOTJF1:~/merge_confilct_demo# git commit -m "File is added to the demo/conflic branch"
demo/conflict a16dfb9] File is added to the demo/conflic branch
1 file changed, 1 insertion(+), 1 deletion(-)
```

Step 6: Then merge demo/conflicts branch to demo/merge branch and solve the merge conflicts.

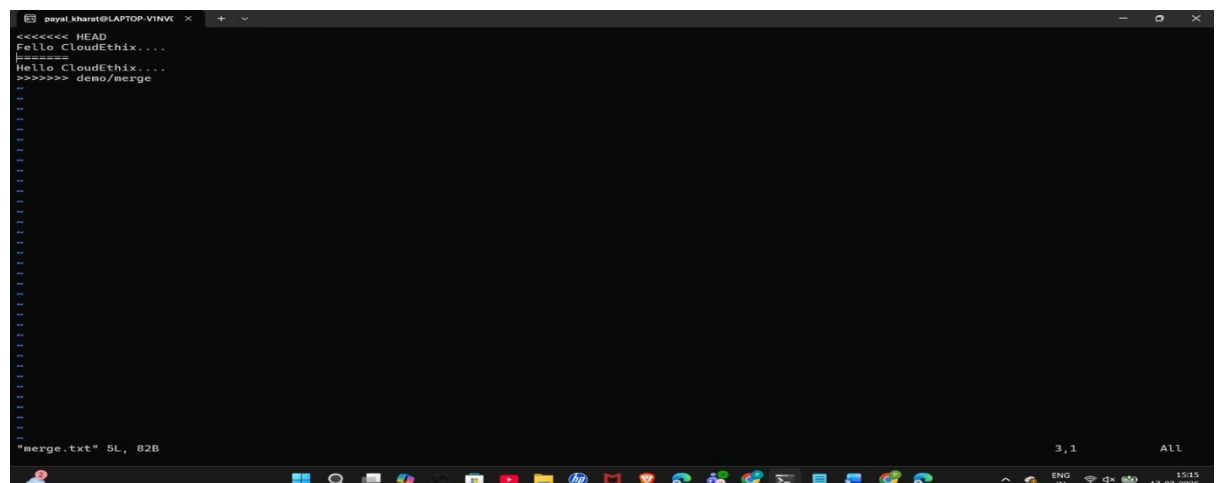

5. Fetch latest changes from master branch of remote forked repository to local master branch. Then merge forked remote master branch with local master branch. Check If all the latest files are there. Then checkout to local cloud_dev03 branch locally. Then Pull latest changes from the remote master branch.

```
root@LAPTOP-HPUOTJF1:~/free-for-dev# git merge origin
Already up to date.
root@LAPTOP-HPUOTJF1:~/free-for-dev# ls
AGENTS.md CLAUDE.md CNAME CODE_OF_CONDUCT.md CONTRIBUTING.md README.md file1.txt file2.txt file3.txt index.html Logo.webp
root@LAPTOP-HPUOTJF1:~/free-for-dev# git branch
  cloud_dev_01
* cloud_dev_02
  master
root@LAPTOP-HPUOTJF1:~/free-for-dev# git checkout master
Switched to branch 'master'
Your branch is up to date with 'origin/master'.
root@LAPTOP-HPUOTJF1:~/free-for-dev# git branch
  cloud_dev_01
  cloud_dev_02
* master
root@LAPTOP-HPUOTJF1:~/free-for-dev# git fetch origin
From https://github.com/achalpadol/free-for-dev
   f5a3afdc..535790c7  master    -> origin/master
root@LAPTOP-HPUOTJF1:~/free-for-dev# git branch -r
  origin/HEAD -> origin/master
  origin/cloud_dev02
  origin/cloud_dev_02
  origin/master
root@LAPTOP-HPUOTJF1:~/free-for-dev# git merge origin/master
Updating f5a3afdc..535790c7
Fast-forward
 Newfile.txt | 1 +
 1 file changed, 1 insertion(+)
 create mode 100644 Newfile.txt
root@LAPTOP-HPUOTJF1:~/free-for-dev# ls
AGENTS.md CLAUDE.md CNAME CODE_OF_CONDUCT.md CONTRIBUTING.md Newfile.txt README.md index.html Logo.webp
root@LAPTOP-HPUOTJF1:~/free-for-dev#
```

```
root@LAPTOP-HPUOTJF1:~/free-for-dev# git pull https://github.com/achalpadol/free-for-dev.git
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 1.21 KiB | 309.00 KiB/s, done.
From https://github.com/achalpadol/free-for-dev
 * branch            HEAD       -> FETCH_HEAD
Updating 535790c7..c2fba8a1
Fast-forward
 Newfile1.txt | 1 +
 1 file changed, 1 insertion(+)
 create mode 100644 Newfile1.txt
root@LAPTOP-HPUOTJF1:~/free-for-dev# ls
AGENTS.md CLAUDE.md CNAME CODE_OF_CONDUCT.md CONTRIBUTING.md Newfile.txt Newfile1.txt README.md index.html Logo.webp
root@LAPTOP-HPUOTJF1:~/free-for-dev#
```

6. Checkout to the cloud_dev01 branch locally and rebase the remote master branch of the forked repository.

```
AGENTS.md CLAUDE.md CNAME CODE_OF_CONDUCT.md CONTRIBUTING.md Newfile.txt Newfile1.txt README.md index.html Logo.webp
root@LAPTOP-HPUOTJF1:~/free-for-dev# git checkout cloud_dev_01
Switched to branch 'cloud_dev_01'
root@LAPTOP-HPUOTJF1:~/free-for-dev# git rebase origin/master
Successfully rebased and updated refs/heads/cloud_dev_01.
root@LAPTOP-HPUOTJF1:~/free-for-dev# git log
commit a4b7a111589cf0c854fddca5564a47dd44f954fff (HEAD -> cloud_dev_01)
Author: Achal S Padol <achalpadol@gmail.com>
Date:   Fri Jul 17 09:15:41 2026 +0000

    Three files are added
```

7. Create one repository locally. Commit any 3 files to the local repository. And then revert back the commits.

```

Initialized empty Git repository in /root/revert_demo/.git/
root@LAPTOP-HPUOTJF1:~/revert_demo# touch file1 file2 file3
root@LAPTOP-HPUOTJF1:~/revert_demo# git status
On branch master

no commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        file1
        file2
        file3

nothing added to commit but untracked files present (use "git add" to track)
root@LAPTOP-HPUOTJF1:~/revert_demo# git add .
root@LAPTOP-HPUOTJF1:~/revert_demo# git commit -m "Three files are added"
[master (root-commit) fadabf8] Three files are added
 3 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 file1
 create mode 100644 file2
 create mode 100644 file3
root@LAPTOP-HPUOTJF1:~/revert_demo# git log
commit fadabf85c489aedeb0b838f34ea5079dad72c02d (HEAD -> master)
Author: Achal S Padol <achalpadol@gmail.com>
Date:   Fri Jul 17 18:22:34 2026 +0000

    Three files are added

root@LAPTOP-HPUOTJF1:~/revert_demo# git revert HEAD
[master 29a3900] Revert "Three files are added"
 3 files changed, 0 insertions(+), 0 deletions(-)
 delete mode 100644 file1
 delete mode 100644 file2
 delete mode 100644 file3
root@LAPTOP-HPUOTJF1:~/revert_demo# |
delete mode 100644 files
root@LAPTOP-HPUOTJF1:~/revert_demo# git log
commit 29a3900df09108bedccd2e3a7585fafc9e3b41e3 (HEAD -> master)
Author: Achal S Padol <achalpadol@gmail.com>
Date:   Fri Jul 17 18:25:27 2026 +0000

    Revert "Three files are added"

    This reverts commit fadabf85c489aedeb0b838f34ea5079dad72c02d.

commit fadabf85c489aedeb0b838f34ea5079dad72c02d
Author: Achal S Padol <achalpadol@gmail.com>
Date:   Fri Jul 17 18:22:34 2026 +0000

    Three files are added
root@LAPTOP-HPUOTJF1:~/revert_demo# |

```

8. Create one local repository. commit some files to the local master branch. Checkout to master_02 branch. Create 2 more files. Add those to the staging area. Create stash area and those files. Then list and delete the stash.
Step 1: Create one local repository. commit some files to the local master branch.

```

root@LAPTOP-HPUOTJF1:~/stash1-demo# git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: will change to "main" in Git 3.0. To configure the initial branch name
hint: to use in all of your new repositories, which will suppress this warning,
hint: call:
hint:   git config --global init.defaultBranch <name>
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:   git branch -m <name>
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /root/stash1-demo/.git/
root@LAPTOP-HPUOTJF1:~/stash1-demo# ls
file1 file2 file3
root@LAPTOP-HPUOTJF1:~/stash1-demo# git add .
root@LAPTOP-HPUOTJF1:~/stash1-demo# git log
fatal: your current branch 'master' does not have any commits yet
root@LAPTOP-HPUOTJF1:~/stash1-demo# git status
On branch master

no commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   file1
        new file:   file2
        new file:   file3

root@LAPTOP-HPUOTJF1:~/stash1-demo# git commit -m "Three file is added"
[master (root-commit) d270664] Three file is added
3 files changed, 0 insertions(+), 0 deletions(-)
create mode 100644 file1
create mode 100644 file2
create mode 100644 file3
root@LAPTOP-HPUOTJF1:~/stash1-demo# git log
commit d27066451a5bd5fd90d27a001dd99a1e359d52ae (HEAD -> master)

```

Step 2: Checkout to master_02 branch. Create 2 more files. Add those to the staging area. Create stash area and those files. Then list and delete the stash.

```

On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   file1
        new file:   file2
        new file:   file3

root@LAPTOP-HPU0TJF1:~/stash1-demo# git commit -m "Three file is added"
[master (root-commit) d270664] Three file is added
 3 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 file1
 create mode 100644 file2
 create mode 100644 file3
root@LAPTOP-HPU0TJF1:~/stash1-demo# git log
commit d27066451a5bd5fd90d27a001dd99a1e359d52ae (HEAD -> master)
Author: Achal S Padol <achalpadol@gmail.com>
Date:   Fri Jul 17 18:35:55 2026 +0000

    Three file is added

root@LAPTOP-HPU0TJF1:~/stash1-demo# git checkout -b master_02
Switched to a new branch 'master_02'
root@LAPTOP-HPU0TJF1:~/stash1-demo# touch text_01 text_02
root@LAPTOP-HPU0TJF1:~/stash1-demo# git status
On branch master_02
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        text_01
        text_02

nothing added to commit but untracked files present (use "git add" to track)
root@LAPTOP-HPU0TJF1:~/stash1-demo# git add .
root@LAPTOP-HPU0TJF1:~/stash1-demo# git stash
Saved working directory and index state WIP on master_02: d270664 Three file is added
root@LAPTOP-HPU0TJF1:~/stash1-demo# git stash list
stash@{0}: WIP on master_02: d270664 Three file is added
root@LAPTOP-HPU0TJF1:~/stash1-demo# git stash clear
root@LAPTOP-HPU0TJF1:~/stash1-demo# git stash list
root@LAPTOP-HPU0TJF1:~/stash1-demo#

```

9. Create a local repository, initialise it and create 3 branches: develop, hotfix and release. Checkout to hotfix branch and commit cloudethix.txt and once committed amend the commit message.

Step 1: Create a local repository, initialise it and create 3 branches: develop, hotfix and release.

```

oot@LAPTOP-HPUOTJF1:~/amend-repo# git add .
oot@LAPTOP-HPUOTJF1:~/amend-repo# git commit -m "file1 is added"
develop (root-commit) 0b8e6a9] file1 is added
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 file1
oot@LAPTOP-HPUOTJF1:~/amend-repo# git branch
develop
oot@LAPTOP-HPUOTJF1:~/amend-repo# git branch hotfix
oot@LAPTOP-HPUOTJF1:~/amend-repo# git branch release
oot@LAPTOP-HPUOTJF1:~/amend-repo# git checkout hotfix
Switched to branch 'hotfix'
oot@LAPTOP-HPUOTJF1:~/amend-repo# touch hotfix.file
oot@LAPTOP-HPUOTJF1:~/amend-repo# git add .
oot@LAPTOP-HPUOTJF1:~/amend-repo# git commit -m "file is added"
hotfix a8555fc] file is added
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 hotfix.file
oot@LAPTOP-HPUOTJF1:~/amend-repo# git log
commit a8555fc18e830e7fdaebb34587ff7900e4f80e06 (HEAD -> hotfix)
Author: Achal S Padol <achalpadol@gmail.com>
Date: Fri Jul 17 18:51:09 2026 +0000

```

file is added

```

commit 0b8e6a9b3fc54693c0e21a3bee5d4d5bbec45e49 (release, develop)
Author: Achal S Padol <achalpadol@gmail.com>
Date: Fri Jul 17 18:47:55 2026 +0000

```

file1 is added

```

oot@LAPTOP-HPUOTJF1:~/amend-repo# git commit --amend -m "hotfix.file is added"
hotfix 8e6732a] hotfix.file is added
Date: Fri Jul 17 18:51:09 2026 +0000
1 file changed, 0 insertions(+), 0 deletions(-)

```

```

Date: Fri Jul 17 18:47:55 2026 +0000

```

file1 is added

```

oot@LAPTOP-HPUOTJF1:~/amend-repo# git commit --amend -m "hotfix.file is added"
[hotfix 8e6732a] hotfix.file is added
Date: Fri Jul 17 18:51:09 2026 +0000
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 hotfix.file
oot@LAPTOP-HPUOTJF1:~/amend-repo# git log
commit 8e6732ad53f5cc71c8a3d20e8c55e826445193e4 (HEAD -> hotfix)
Author: Achal S Padol <achalpadol@gmail.com>
Date: Fri Jul 17 18:51:09 2026 +0000

```

hotfix.file is added

```

commit 0b8e6a9b3fc54693c0e21a3bee5d4d5bbec45e49 (release, develop)
Author: Achal S Padol <achalpadol@gmail.com>
Date: Fri Jul 17 18:47:55 2026 +0000

```

file1 is added

```

oot@LAPTOP-HPUOTJF1:~/amend-repo# |

```