

## Bandit Level 31 -> Level 32

SSH Parameters			
Server:	bandit.labs.overthewire.org		
Port:	2220		

Website URLs				
Level 31—>32	OverTheWire: Level Goal: Bandit Level 31 → Level 32			
Level 32—>33	OverTheWire: Bandit Level 32 → Level 33			


Passwords				
Level	User Name	Password		
Level 31>32	bandit31	OoffzGDlzhAlerFJ2cAiz1D41JW1Mhmt		
Level 32>33	bandit32	rmCBvG56y58BXzv98yZGdO7ATVL5dW8y		

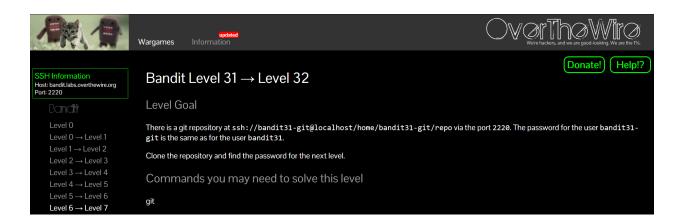

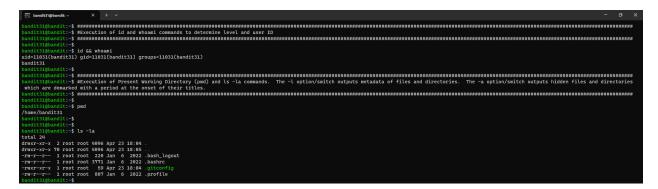

```
| Some bound to provide a second to the first point of the first point point of the first point point of the first point point point of the first point point
```



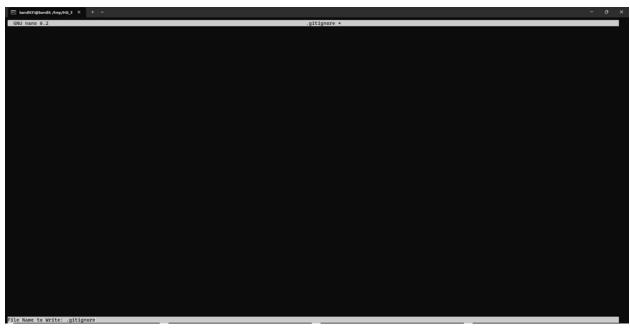

```
bandita@bandit:/twp/Mc_3l_32/backup/repo$ #Execute the "git branch -a" command to view the current/selected branch. The current/selected branch is denoted by an asterick [*]. Note: We need to add and commit key.txt to the master branch.
#Execute the command "git add key.txt" to index/stage the file. Next, commit the file, to the master branch or "git commit -m "commit of key.txt as prescribed in README.md"

Bandital@bandit:/twp/Mc_3l_32/backup/repo$ #Execute the "git branch -a" command to view the current/selected branch. The current/selected branch is denoted by an asterick [*]. Note: We need to add and commit with the command "git add key.txt" to index/stage the file. Next, commit the file, to the master branch, via "git commit -m "commit of key.txt as prescribed in README.md"

Bandital@bandit:/twp/Mc_3l_32/backup/repo$ git branch -a "master restets/origin/saster re
```

\*\*\*\*\*\*\*\*\*\*\*

## Level 32 —> Level 33 Password

rmCBvG56y58BXzv98yZGdO7ATVL5dW8y