



1. Recreate the database by running the below commands:
drop database if exists online_store_db;
create database online_store_db;
2. Clone the project from GitHub:
git clone [git@github.com:achiever102/onlineshop.git](https://github.com/achiever102/onlineshop.git)
3. Create an AWS S3 bucket to store application images:
 - Login to AWS
 - Go to S3 service

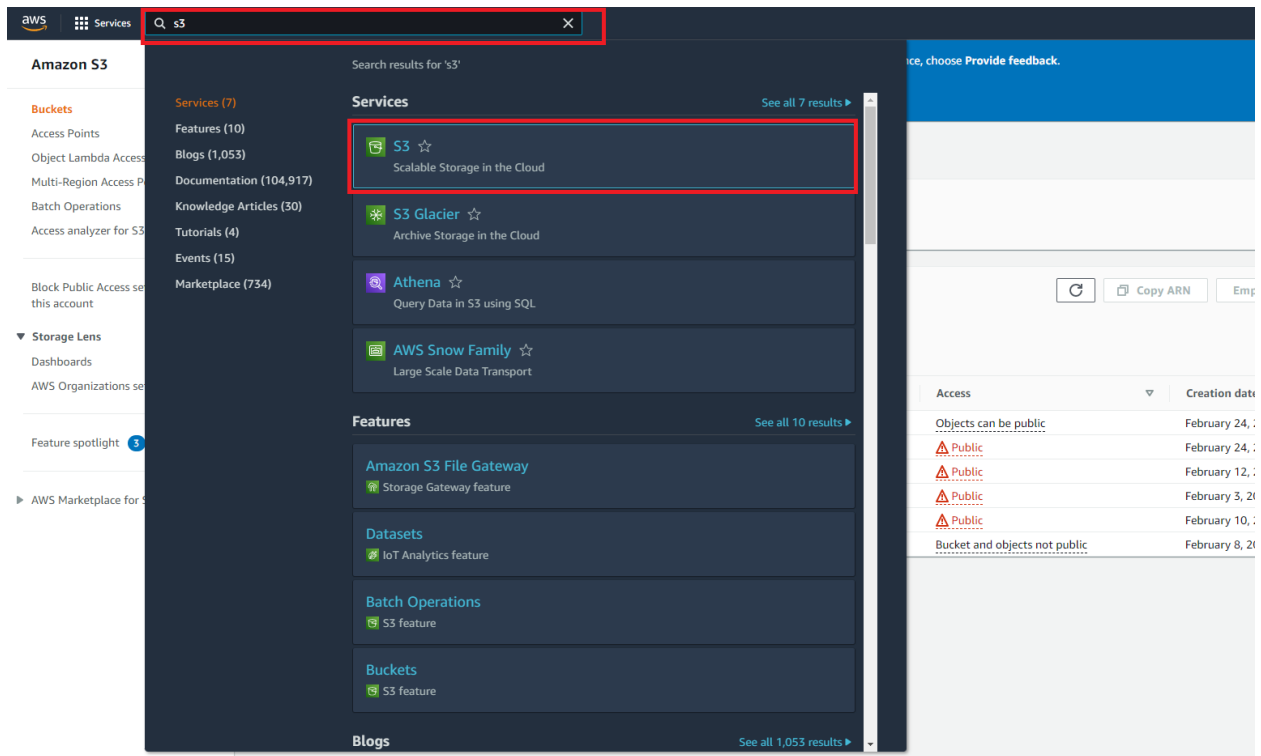

- Click on Create Bucket:

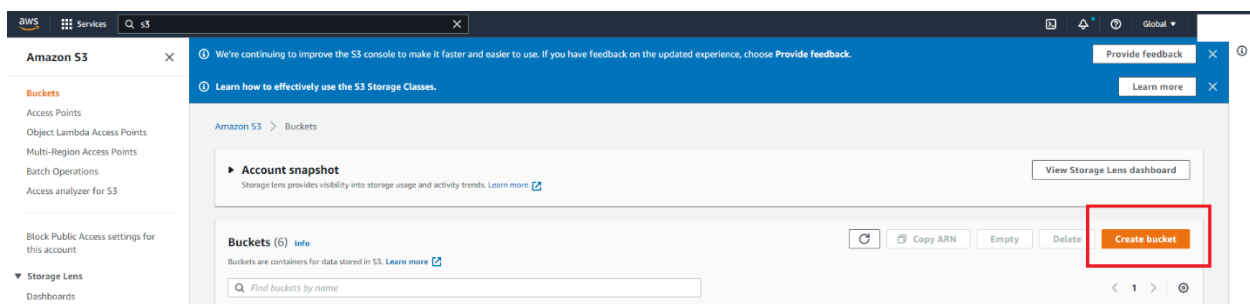

- Enter bucket name and make the bucket public:

<

We're continuing to improve the S3 console to make it faster and easier to use. If you have feedback on the updated experience, choose [Provide feedback](#).

Bucket owner enforced

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ **Block all public access**

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**


S3 will ignore all ACLs that grant public access to buckets and objects.

☐ **Block public access to buckets and objects granted through new public bucket or access point policies**

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

**Turning off block all public access might result in this bucket and the objects within becoming public**

AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

We're continuing to improve the S3 console to make it faster and easier to use. If you have feedback on the updated experience, choose [Provide Feedback](#).

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ Disable
☐ Enable

Tags (0) - optional

Track storage cost or other criteria by tagging your bucket. [Learn more](#)

No tags associated with this bucket.

Add tag

Default encryption

Automatically encrypt new objects stored in this bucket. [Learn more](#)

Server-side encryption

☒ Disable
☐ Enable

Advanced settings

After creating the bucket you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel>Create bucket

- Click on the created bucket:

The screenshot shows the Amazon S3 console interface. On the left is a navigation sidebar with options like Buckets, Access Points, and Storage Lens. The main content area displays a list of buckets. A table with columns 'Name', 'AWS Region', 'Access', and 'Creation date' is shown. The first row, representing the bucket 'appbucket12029883' in the 'US East (N. Virginia) us-east-1' region, is highlighted with a red rectangular box. Above the table, there are notification banners and a 'Create bucket' button.

- Click on Permissions:

This screenshot shows the 'Permissions' tab for the bucket 'appbucket12029883'. The 'Permissions' tab is highlighted with a red box. The page content includes a 'Permissions overview' section, a 'Block public access (bucket settings)' section with a toggle set to 'Off', and a 'Bucket policy' section at the bottom. The 'Block public access' section includes a warning icon and text indicating that public access is blocked.

- Scroll down to bucket policy and click on edit:

The screenshot displays the 'Bucket policy' section of the console. It shows a text area for the policy, which currently contains 'No policy to display.' To the right of the text area, there are 'Edit' and 'Delete' buttons, with the 'Edit' button highlighted by a red rectangular box. The page also includes a 'Copy' button and a 'Learn more' link.

- Copy the bucket ARN:

Amazon S3

We're continuing to improve the S3 console to make it faster and easier to use. If you have feedback on the updated experience, choose [Provide feedback](#).

Amazon S3 > Buckets > appbucket12029883 > Edit bucket policy

Edit bucket policy

Bucket policy
The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

Bucket ARN
arn:aws:s3::appbucket12029883

Policy

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "Statement1",
6       "Principal": {},
7       "Effect": "Allow",
8       "Action": [],
9       "Resource": []
10    }
11  ]
12 }
```

Edit statement
Statement1 Remove

1. Add actions
Choose a service

Available
AMP
API Gateway
API Gateway V2
Access Analyzer
Account
Activate
Alexa for Business
Amplify
Amplify Admin
Amplify UI Builder

- Replace the existing policy with the below and make sure to replace the highlighted ARN with yours:

Amazon S3

We're continuing to improve the S3 console to make it faster and easier to use. If you have feedback on the updated experience, choose [Provide feedback](#).

Amazon S3 > Buckets > appbucket12029883 > Edit bucket policy

Edit bucket policy

Bucket policy
The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

Bucket ARN
arn:aws:s3::appbucket12029883

Policy

```
1 {
2   "Id": "Policy1648556313478",
3   "Version": "2012-10-17",
4   "Statement": [
5     {
6       "Sid": "Stmt1648556313474",
7       "Action": "s3:*",
8       "Effect": "Allow",
9       "Resource": "arn:aws:s3::appbucket12029883/*",
10      "Principal": ""
11    }
12  ]
13 }
```


Edit statement
Stmt1648556313474 Remove

1. Add actions
Choose a service


Included
S3

Available
AMP
API Gateway
API Gateway V2
Access Analyzer
Account
Activate
Alexa for Business


- Click on save changes:

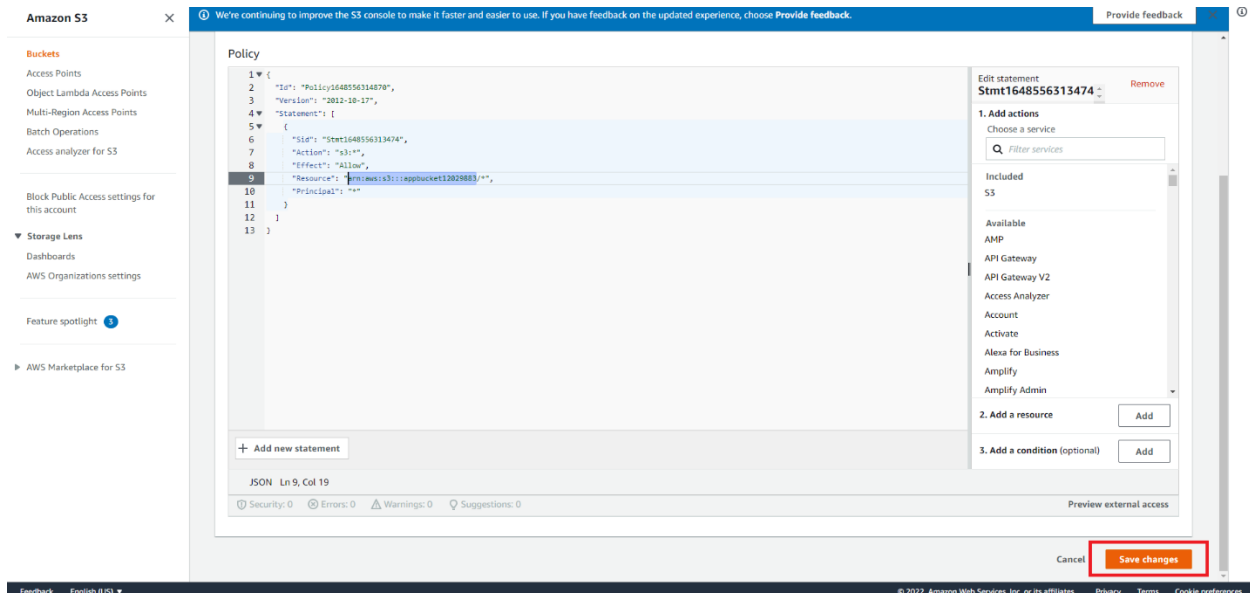


- Go to bucket properties and copy the bucket region and bucket name:

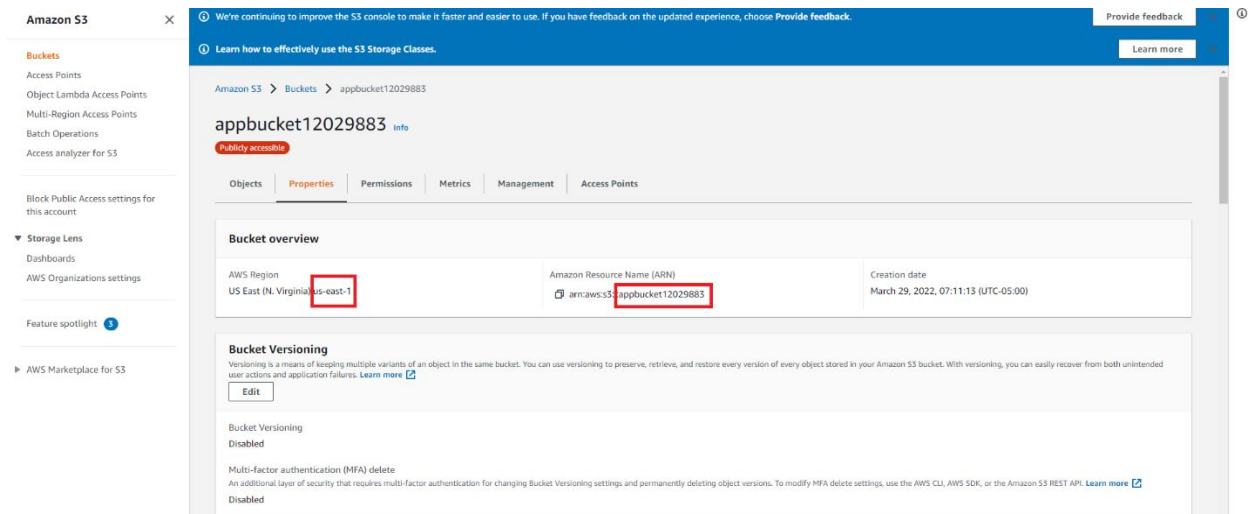

- Create AWS access key:
 - Click on the user's drop down list and click on Security Credentials:

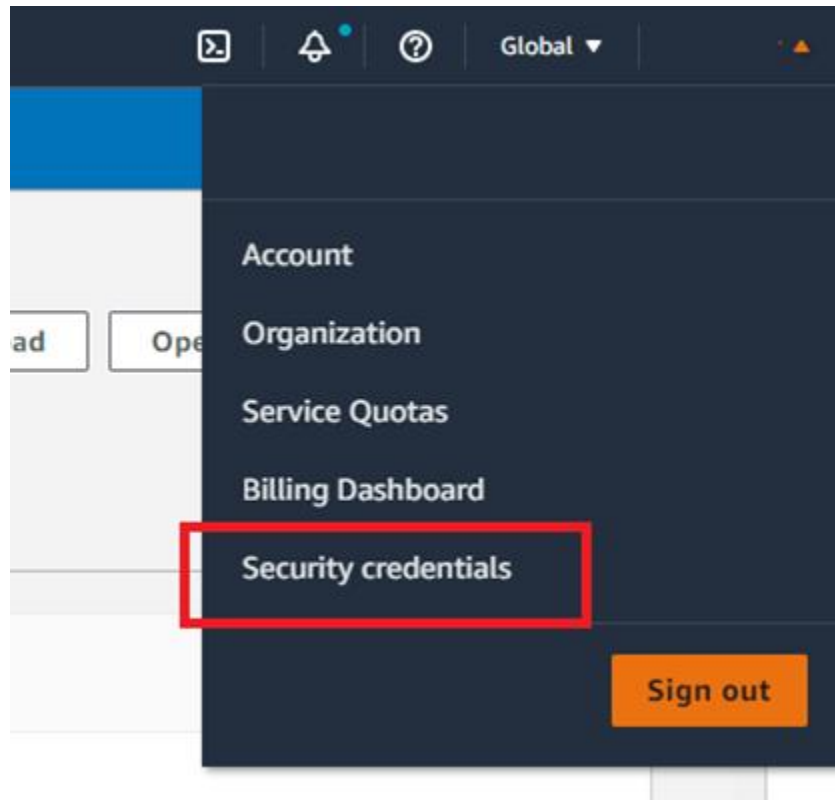

- Click on create new access key:

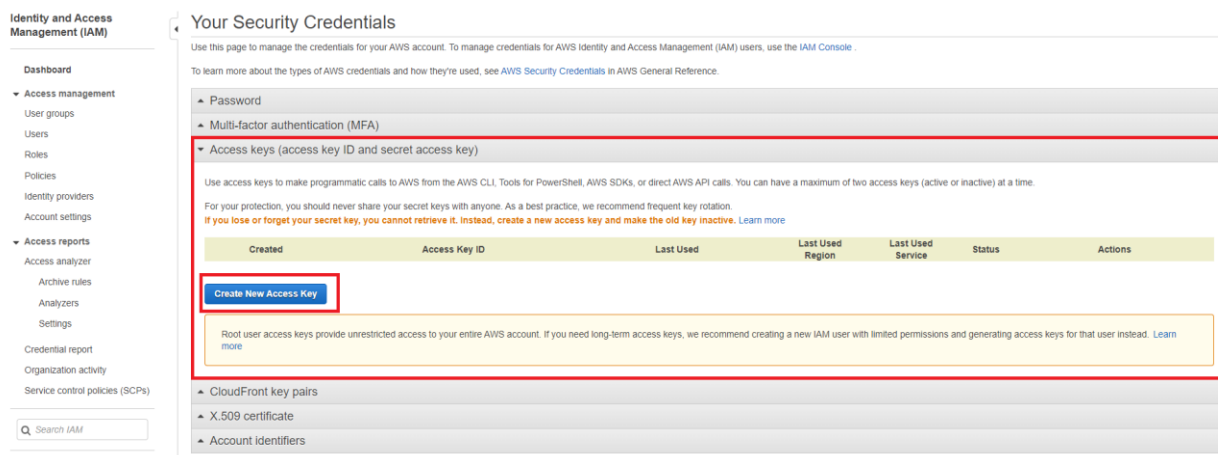

- Open the downloaded CSV file and copy the access key and secret key.

4. Open the backend project in IntelliJ and create a file with name `aws.config.properties` in the directory: `src/main/resources` then add the below parameters to the file:
`accesskey=access key from the downloaded file`
`secretKey=secret key from the downloaded file`
`bucketName=bucket name`
`bucketUrl=https://bucket-name.s3.region.amazonaws.com/`
`region=region`
5. Download and install JDK 11
6. Start the backend project in IntelliJ
7. Start the frontend project in VSCode and run the commands:
 - `npm install`
 - `npm start`
8. you can login to the application using the manager user username and password:
`manager/password`