


# Directory scans – *SkyeFS\_READDIR(/a/b/)*

pvfsHandle ( $H^b$ ) for  $b \leftarrow \text{SkyeFS\_RESOLVE}(/a/b/)$

**SkyeFS client uses the PVFS readdir to get the list of partitions  $\{P_0, P_1, P_2, P_3 \dots\}$  in a directory**

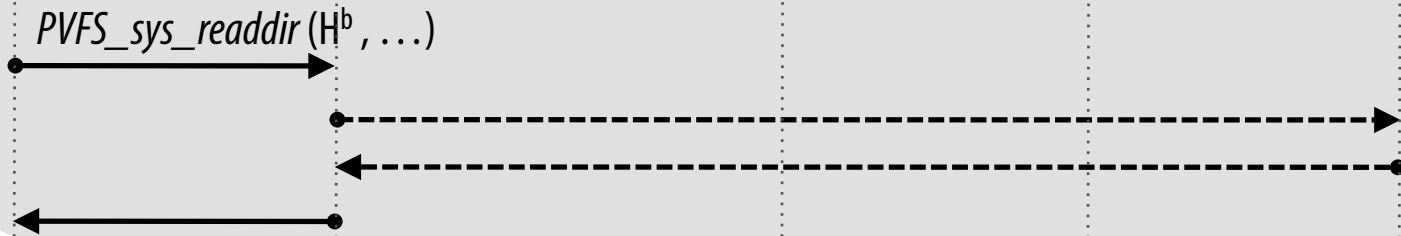

pvfsHandle ( $H^{P_k}$ ) for  $b \leftarrow \text{SkyeFS\_RESOLVE}(b/P_k)$  (for all partitions returned above)

**SkyeFS client uses the PVFS readdir on all partitions returned above**

