

QuESO

Quantum Enhanced Seat Optimizer

Marc Breiner Sørensen

May 4, 2026

Abstract

QuESO (Quantum Enhanced Seat Optimizer), is a quadratic unconstrained binary optimization (QUBO) formulation for the office seating assignment problem. The problem is cast as a weighted quadratic assignment problem (WQAP) over two graphs: a flow graph encoding pairwise employee affinities and a distance graph encoding office seat adjacency. The formulation accommodates an arbitrary number of rooms with configurable geometry, variable employee attendance over a discrete time period, fixed seat constraints, and the case where the number of employees exceeds the number of available seats. The latter is handled through introduction of a null seat, rendering the problem always feasible and allowing the optimizer to jointly determine seating assignments and identify unassigned employees. Attendance data modulates pairwise affinities to reflect shared onsite time, and a variable elimination preprocessing step reduces problem size by removing absent and fixed-seat employees prior to optimization. The resulting QUBO matrix is derived in closed form, with explicit expressions for all matrix elements and their contributions from the objective and constraint penalty terms. The formulation is solver-agnostic and is implemented in the open source package **QuESO**, targeting CPU-based quantum-inspired annealers.

Contents

1	Introduction	2
2	Problem statement	3
2.1	Preliminaries	3
2.2	Problem geometry	3
2.3	The assignment matrix	4
2.4	Employee attendance	5
2.5	Employee relations	6
2.6	Fixed seating	6
3	The full QUBO formulation	7
4	Variable Elimination	7
4.1	Elimination of absent employees	8
4.2	Elimination of fixed-seat employees	8
4.3	The reduced problem	8
4.4	Linear bias from fixed employees	9
5	Structure of the matrix elements	9
5.1	Affinity term	9
5.2	Row penalty	9
5.3	Column penalty	10
5.4	Diagonal elements	10
5.5	Summary	10

1 Introduction

We derive a *Quadratic Unconstrained Binary Optimization* (QUBO) formulation for optimizing seating in the context of office spaces. The problem has equivalence with the well-known graph problem of a *weighted quadratic assignment problem* (WQAP). QUBO formulations encompasses a rich class of combinatorial optimization problems that are in general known to be $\mathcal{NP}$ -hard.

We begin by giving a definition of QUBO problems.

Definition 1.1 (QUBO). Let $\mathbb{B}^n$ be the n -dimensional vector space over the binary field $\mathbb{B}$. QUBO problems are binary optimization problems that consist of finding the argument $x \in \mathbb{B}^n$, which minimizes some unconstrained pseudo-boolean function $C(x) : \mathbb{B}^n \rightarrow \mathbb{R}$, which may be formulated as quadratic forms.

$$\arg \min_{x \in \mathbb{B}^n} C(x) \quad (1)$$

$$C(x) = \mathbf{x}^\top Q \mathbf{x}, \quad (2)$$

An example of a vector from $\mathbb{B}^n$ is $(1, 0, 0)$ for $n = 3$. The matrix Q is typically referred to as the QUBO matrix and it completely defines the problem. Note that due to $x_i^2 = x_i$ the diagonal of Q represent linear terms. Furthermore, since the x_i 's are simply numbers, it is symmetric: $x_i x_j = x_j x_i = \frac{1}{2} x_i x_j + \frac{1}{2} x_j x_i$. Hence, there exists equivalent formulations with either symmetric or upper triangular matrices. The function $C(x)$ is often referred to as the *cost function*.

In our optimization context we shall be concerned with minimizing such a cost function. The cost function encodes the information that guides our choice of permutation.

WQAP can be visualized as a graph-problem. We thus give a definition of a graph.

Definition 1.2 (Graph). A *graph* is a pair $G = (V, E)$ where V is a set of *vertices* (or *nodes*) and $E \subseteq \binom{V}{2}$ is a set of *edges*, i.e. unordered pairs of distinct vertices. If E is a multiset and self-loops $\{v, v\}$ are permitted, G is called a *multigraph*. A *directed graph* (digraph) replaces E with a set of ordered pairs $A \subseteq V \times V$, called *arcs*.

We do not give a formal definition of WQAP, but instead explain it in relation to the problem at hand. The WQAP consist of the following problem: given two graphs - a flow graph on entities and a distance graph on locations - find the assignment of entities to locations that maximizes flow between co-located entities. For our case this means

- **Flow graph:** employees as vertices, edge weights P_{nm} - how much employees n and m need to be near each other.
- **Distance graph:** seats as nodes, edge weights A_{sv} - which seats are adjacent

WQAP is notoriously difficult even for moderate sizes. Exhaustive enumeration of solutions is an infeasible approach in any practical scale of input sizes, which is part of the motivation for attacking it with quantum-inspired solutions rather than exact solvers.

2 Problem statement

In this section we pose the algebraic entities needed to set up the QUBO problem.

2.1 Preliminaries

We will assume a time block $T \in \mathbb{N}$ for which to optimize the seating schedule. T can be any number of integer periods, and will have an implicit unit associated with it. For example, $T = 5$ may represent 5 *workdays*, such that T in this case represents a workweek. We will make use of this specific assumption in the following.

Let $r \in \{1, 2, \dots, R\}$, for $r, R \in \mathbb{N}$, be an enumeration of the available rooms, and $\mathcal{R}_r$ be the set of seat indices belonging to room r . Each room is assumed to have n_r seats, such that $S = \sum_{r=1}^R n_r$ with $S \in \mathbb{N}$ being the total number of seats in the optimization problem.

2.2 Problem geometry

We pose a binary matrix $A \in \mathbb{B}^{S+1 \times S+1}$ encoding the room geometry, with $A_{sv} = 1$ if seats s and v are adjacent, for $s, v \in \{1, 2, S+1\}$. There are two choices in constructing A . Either one may choose non-zero entries only for directly adjacent (neighbouring) seats, or one may choose non-zero entries for any combination of s, v for $s, v \in \mathcal{R}_r$ for some room r . For some teams it may be necessary to enforce strict adjacency, while for other larger teams, simply seating them within the same office room is sufficient. Additionally the latter choice may be more convenient for smaller room sizes. In any case the particular realization of A in the end depends on the rooms that are part of the optimization task.

A_{sv} is equivalent to an adjacency matrix for a graph, where each room is a partition into disjoint subgraphs indexed by r with vertex labels from the set $\mathcal{R}_r$, such that joining disjoint subgraphs denoted by $G_i = (\mathcal{R}_i, \{A_{sv} | s, v \in \mathcal{R}_i\})$ as $G = \sqcup_i G_i$ (the disjoint union of subgraphs) produces a graph which represents the problem at hand.

We also note that since A has equivalence to a graph adjacency matrix, conventionally $A_{sv} = A_{vs}$ since the graph is undirected. This implies a symmetric tensor. We, however, choose to represent the tensor by an upper triangular matrix representation for interpretative and algorithmic purposes, even though the graph representing our problem is undirected in the strict sense. From this we additionally choose the convention that $A_{ss}=0 \forall s$, since this self-adjacency will be shown to relate to self-affinity that in turn also rewards employees seated at the same desk, for reasons that will be clear later. Additionally this slightly reduces the density of the resulting QUBO matrix, which is marginally better for solvers.

The matrix representation of A will show geometric structures pertaining to this graph such as triangles and disjointedness.

We now present an example with $R = 2, S = 8, \mathcal{R}_1 = \{1, 2, 3, 4, 5\}, \mathcal{R}_2 = \{6, 7, 8\}$ for which the matrix representation of A is given by

$$A = \begin{bmatrix} 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}, \quad (3)$$

which, as noted above, displays geometric properties of the graph such as the two triangles, and a block structure displaying the disjointedness. This A matrix encodes the problem represented by the graph in figure 2. If one does not care about immediate adjacency of seats but only

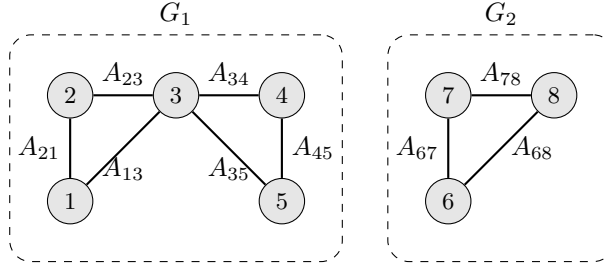


Figure 1: Room geometry from the example represented as two disjoint subgraphs $G_i = (V_i, E_i)$.

whether seats are within the same room, this corresponds to forming the fully connected graph instead, which results in several additional non-zero elements in the matrix representation of A and corresponds to a relaxation of the optimization problem.

2.3 The assignment matrix

Given $N \in \mathbb{N}$ employees to be seated, we may construct a binary matrix $X \in \mathbb{B}^{N \times S+1}$ of size $N \times S + 1$, with indices $n, s \in \mathbb{N}$ representing respectively employees and seats, such that $X_{ns} = 1$ denotes that employee n is assigned to seat s for the week. Note that while $n \in \{1, 2, \dots, N\}$ the seat index runs up to $S + 1$ as $s \in \{1, 2, \dots, S + 1\}$ to allow an assignment to a "null" seat (no seat), represented by the value $s = S + 1$ such that $X_{n(S+1)} = 1$ denotes that employee n was

not assigned to any seat during T , which might be the case if $N > S$ in which case no complete assignment of all employees is possible.

$$X = \left\{ \begin{array}{ccc} & \overbrace{\hspace{1.5cm}}^{S+1} & \\ \begin{bmatrix} X_{11} & \cdots & X_{1(S+1)} \\ \vdots & \ddots & \vdots \\ X_{N1} & \cdots & X_{N(S+1)} \end{bmatrix} & & \end{array} \right\}^N \quad (4)$$

X is a rank-2 tensor with a block form as

$$X = \begin{bmatrix} [X_{11} & \cdots & X_{1(S+1)}] \\ \vdots \\ [X_{i1} & \cdots & X_{i(S+1)}] \\ \vdots \\ [X_{N1} & \cdots & X_{N(S+1)}] \end{bmatrix}, \quad (5)$$

such that each row of X is a one-hot encoded block (vector) of length $S + 1$, with the i 'th entry being set to 1 and all other being 0. This structure ensures that every employee is assigned at most one seat. Consider an example with $N = 6, S = 4$ - so five employees to be assigned to just four seats. We may write the matrix as

$$X = \begin{bmatrix} 0 & 0 & 0 & 1 & 0 \\ 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 \\ 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 \end{bmatrix}, \quad (6)$$

which represents an assignment where employee 1 sits at seat 4, employee 2 sits at seat 1, employee 3 sits at seat 3, employee 5 sits at seat 2 and employees 4 and 6 have no seats for the week.

Notice also the structure of the matrix. Excluding the last column, each column only has at most one non-zero entry, while each of the rows have exactly one non-zero entry. This particular structure will be enforced with constraints to be defined below. If every seat were filled (i.e. $N = M$ and no null assignments), X would be a permutation matrix, which is a special case of an orthogonal matrix since $XX^T = I$ and $X^T X = I$. In our relaxed rectangular case ($N \times (M + 1)$, with possible null assignments and empty seats), X is a doubly stochastic matrix in structure. More precisely it belongs to the set of partial permutation matrices. In linear algebra terms, each row of X is a standard basis vector $e_k \in \{0, 1\}^{S+1}$, where the position of the 1 indicates the assigned seat, and seats form an orthonormal basis with representation e_k .

2.4 Employee attendance

In finding the right assignment of seats, we wish to consider the attendance of a given employee within the time period T . For T in units of days, we wish to attribute greater weight to those employees that are present the most days. Employees may be sick, have scheduled time off, vacation, or be working from home. We pose the matrix $W \in \mathbb{B}^{N \times T}$, where $T = 5$ for a workweek. $W_{nt} = 1$ if employee n is present at the office on day t , for $t \in \{1, \dots, T\}$. We continue our example from before with $N = 6, T = 5$.

$$W = \begin{bmatrix} 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 0 & 0 \\ 1 & 1 & 1 & 0 & 0 \\ 1 & 0 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 \end{bmatrix} \quad (7)$$

representing the case where employees 1, 5 and 6 are present at the office every day of the week, while employees 2 and 3 are off-site Thursday and Friday, and employee 4 is off-site on Tuesday.

2.5 Employee relations

Probably most importantly, our solution must take into account the necessity for two or more employees to be seated adjacently. We represent these relationships with the matrix $P \in \mathbb{B}^{N \times N}$, where $P_{nm} = C$ is equal to some constant $C \in \mathbb{R}$, which describes the degree of necessity, or affinity, of employee n to be seated next to employee m .

Note that P is equivalent to a digraph G representing employee relations. In this sense P is a weighted adjacency matrix where in general $P_{nm} \neq P_{mn}$ since the two employees may not hold the same affinity for one another. Expanding on our running example for $N = 6$ a realization of P could be (here denoting only P_{nm} for non-zero entries).

$$P = \begin{bmatrix} 0 & P_{12} & P_{13} & 0 & 0 & 0 \\ P_{21} & 0 & P_{23} & 0 & 0 & P_{26} \\ P_{31} & P_{32} & 0 & P_{34} & P_{35} & P_{36} \\ 0 & 0 & P_{43} & 0 & 0 & 0 \\ 0 & 0 & P_{53} & 0 & 0 & 0 \\ 0 & P_{62} & P_{63} & 0 & 0 & 0 \end{bmatrix} \quad (8)$$

which corresponds to the graph




Figure 2: Room geometry from the example represented as two disjoint subgraphs $G_i = (V_i, E_i)$.

2.6 Fixed seating

Some employees might, for one reason or the other, require a fixed seat during the period of optimization. Such a constraint may be enforced on the problem via introduction of a binary matrix $F \in \mathbb{B}^{N \times S}$ where $F_{ns} = 1$ means employee n must be seated at seat s . We continue with

our running example for $N = 6, S = 4, T = 5$.

$$F = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (9)$$

representing the case where employee 3 must be assigned to seat 2, while employee 6 must be assigned to seat 4.

3 The full QUBO formulation

We now have all of the components that define our problem. In order to exploit algorithms to solve QUBO problems we simply have left to put the pieces together in a formulation of the form

$$\arg \min_{x \in \mathbb{B}^n} x^T Q x. \quad (10)$$

If we begin by vectorizing X , by flattening it into a $1D$ -array, and identify the QUBO matrix

$$Q = - \sum_{nmsv} \tilde{P}_{nm} A_{sv} \cdot e_{ns} e_{mv}^T + \lambda_1 P_1 + \lambda_2 P_2 + \lambda_3 P_3, \quad (11)$$

where the augmented intra-day affinity matrix $\tilde{P}$ is

$$\tilde{P}_{nm} = P_{nm} \sum_{t=1}^T W_{nt} W_{mt}, \quad (12)$$

and the penalty terms, that enforce our identified constraints are given by

$$P_{\text{row}} = \sum_{n=1}^N \left(1 - \sum_{s=1}^{S+1} X_{ns} \right)^2 \quad (13)$$

$$P_{\text{col}} = \sum_{s=1}^S \sum_{n < m} X_{ns} X_{ms} \quad (14)$$

$$P_{\text{fixed}} = \sum_{n,s} F_{ns} (1 - X_{ns})^2 + \sum_n \mathbf{1}[\exists s : F_{ns} = 1] \sum_{v \neq s} X_{nv}^2, \quad (15)$$

then we have a valid QUBO form. We unpack these contributions in the following. Before we do this, we give an overview of using the technique of *variable elimination* to reduce the complexity of the QUBO before annealing.

4 Variable Elimination

Before constructing the QUBO matrix, we may reduce the size of the problem by identifying variables whose values are known *a priori*, and substituting these known values directly into the objective and constraint terms. This procedure is known as *variable elimination*, and it reduces both the number of free variables and the size of the resulting QUBO matrix, which is beneficial for solver performance.

4.1 Elimination of absent employees

Recall the modulated affinity matrix

$$\tilde{P}_{nm} = P_{nm} \sum_{t=1}^T W_{nt} W_{mt}. \quad (16)$$

If employee n has no attendance during the period T , i.e. $\sum_t W_{nt} = 0$, then $\tilde{P}_{nm} = 0$ for all m . Employee n contributes nothing to the affinity objective regardless of their seat assignment, and assigning them a real seat wastes a seat that could be allocated to an attending employee. We therefore set $X_{n(S+1)} = 1$ and $X_{ns} = 0$ for all $s \leq S$, and remove all variables $\{X_{ns}\}_{s=1}^{S+1}$ from the problem entirely.

4.2 Elimination of fixed-seat employees

Suppose employee n^* has a fixed seat assignment s^* , i.e. $F_{n^*s^*} = 1$ for some $s^* \leq S, n^* \leq N$. Then we know with certainty that

$$X_{n^*s^*} = 1, \quad X_{n^*s} = 0 \ \forall s \neq s^*, \quad X_{ns^*} = 0 \ \forall n \neq n^*. \quad (17)$$

We substitute these values directly into the objective. Consider the affinity terms involving employee n^* :

$$-\sum_{m,s,v} \tilde{P}_{n^*m} A_{s^*v} X_{n^*s^*} X_{mv} = -\sum_{m,v} \tilde{P}_{n^*m} A_{s^*v} X_{mv}, \quad (18)$$

where we have substituted $X_{n^*s^*} = 1$. This term, which was previously quadratic in X , is now *linear* in X_{mv} . In QUBO notation, linear terms correspond to diagonal entries of the QUBO matrix Q , since $x_\mu^2 = x_\mu$ for binary variables. Specifically, for each active employee m and each seat v , the value $-\tilde{P}_{n^*m} A_{s^*v}$ is added to the diagonal entry $Q_{\mu\mu}$ where μ is the flattened index corresponding to (m, v) , which holds info about other employees "m" seated next to n^* (if adjacent).

This means that fixed-seat employees are removed as decision variables — they do not appear as rows or columns in the reduced QUBO matrix — yet their affinity relationships with active employees are preserved as linear biases on the active employees' seat variables. The column constraint for seat s^* is also trivially satisfied and may be dropped from P_{col} .

4.3 The reduced problem

Let $\mathcal{N}_{\text{active}} \subseteq \{1, \dots, N\}$ denote the set of employees remaining after both elimination steps, with $N_{\text{active}} = |\mathcal{N}_{\text{active}}|$. The reduced assignment matrix $\hat{X} \in \mathbb{B}^{N_{\text{active}} \times (S+1)}$ contains only the rows corresponding to active employees, and the reduced QUBO matrix has dimensions

$$Q \in \mathbb{R}^{N_{\text{active}}(S+1) \times N_{\text{active}}(S+1)}. \quad (19)$$

The index mapping $\mu = n \cdot (S+1) + s$ relates each flattened variable x_μ to the pair (n, s) in the reduced problem. A bookkeeping structure records the correspondence between reduced indices and original employee identifiers, enabling the solver output to be translated back to the full employee set after optimization:

$$\text{employee_index_map} = \begin{cases} \text{no.attendance} & \{n : \sum_t W_{nt} = 0\} \\ \text{pre.fixed} & \{n \mapsto s^* : F_{ns^*} = 1\} \\ \text{active} & \{\hat{n} \mapsto n : n \in \mathcal{N}_{\text{active}}\} \end{cases} \quad (20)$$

where $\hat{n}$ denotes the reduced index of an active employee.

4.4 Linear bias from fixed employees

The full set of linear bias corrections from all fixed-seat employees is collected before constructing the QUBO. For each fixed employee $n^* \in \text{pre_fixed}$ with assigned seat s^* , and for each active employee $\hat{n}$ with original index n , the diagonal bias is

$$\Delta Q_{\mu\mu} = -\tilde{P}_{n^*m} A_{s^*v}, \quad \mu = \hat{n} \cdot (S + 1) + v, \quad (21)$$

summed over all fixed employees n^* . These corrections are added to the diagonal of Q after the quadratic terms have been assembled.

5 Structure of the matrix elements

The QUBO matrix Q_{nmsv} is most naturally understood as a rank-4 tensor before flattening. Given the double index structure of X_{ns} , we write the matrix elements as $Q_{ns,mv}$, which after applying the flattening map $\mu(n, s) = n \cdot (S + 1) + s$ correspond to $Q_{\mu(n,s),\mu(m,v)}$. The full matrix element is

$$Q_{ns,mv} = -\tilde{P}_{nm} A_{sv} + \lambda_1 [P_{\text{row}}]_{ns,mv} + \lambda_2 [P_{\text{col}}]_{ns,mv}, \quad (22)$$

and we now expand each contribution.

5.1 Affinity term

The affinity contribution is simply

$$-\tilde{P}_{nm} A_{sv}, \quad (23)$$

which is non-zero only when employees n and m have nonzero affinity and seats s and v are adjacent. This term is purely off-diagonal in the employee indices when $n \neq m$.

5.2 Row penalty

Every employee must be assigned to exactly one seat (or the null seat), giving an equality constraint. Expanding $P_{\text{row}} = \sum_n (1 - \sum_s X_{ns})^2$ for a fixed employee n yields

$$\begin{aligned} \left(1 - \sum_s X_{ns}\right)^2 &= 1 - 2 \sum_s X_{ns} + \sum_s \sum_v X_{ns} X_{nv} \\ &= 1 - 2 \sum_s X_{ns} + \sum_s X_{ns}^2 + \sum_{s \neq v} X_{ns} X_{nv} \\ &= 1 - \sum_s X_{ns} + \sum_{s \neq v} X_{ns} X_{nv}, \end{aligned} \quad (24)$$

where we used $X_{ns}^2 = X_{ns}$ for binary variables. Or the full form given as

$$P_{\text{row}} = \sum_n \left(1 - 2 \sum_s X_{ns} + \sum_s \sum_v X_{ns} X_{nv}\right). \quad (25)$$

The contributions to the QUBO matrix are therefore a diagonal term of -1 per variable and a quadratic coupling of $+1$ between any two seats of the same employee. Crucially, different employees are never coupled by P_{row} , since the sum over n is independent.

5.3 Column penalty

One might expect the column penalty to take the analogous squared form

$$P_{\text{col}} \stackrel{?}{=} \sum_{s=1}^S \left(1 - \sum_n X_{ns} \right)^2, \quad (26)$$

enforcing that each seat is occupied by exactly one employee. This is however incorrect for two reasons. First, if $N < S$ or after variable elimination reduces the active employee count, seats may legitimately be unoccupied, and the squared form would penalize valid empty-seat configurations. Second, the constraint is fundamentally an inequality: no seat may be shared by more than one employee, rather than the equality required by the row constraint. The correct formulation is therefore

$$P_{\text{col}} = \sum_{s=1}^S \sum_{n < m} X_{ns} X_{ms}, \quad (27)$$

which contributes +1 for every pair of employees assigned to the same real seat and zero otherwise, with no linear term since empty seats are not penalized. The null seat $s = S + 1$ is excluded from the sum entirely, as arbitrarily many employees may be assigned to it.

5.4 Diagonal elements

Collecting all contributions to the diagonal $\mu = \mu(n, s)$, i.e. $n = m, s = v$:

$$Q_{\mu\mu} = -\tilde{P}_{nn} A_{ss} - \lambda_1 + \Delta Q_{\mu\mu}, \quad (28)$$

where $A_{ss} = 0$ by convention and $\tilde{P}_{nn}$ encodes self-affinity, which is typically zero. The $-\lambda_1$ term arises from the linear part of P_{row} , and $\Delta Q_{\mu\mu}$ collects any linear bias from fixed-seat employees as described in the previous section. The diagonal therefore simplifies to

$$Q_{\mu\mu} = -\lambda_1 + \Delta Q_{\mu\mu}. \quad (29)$$

5.5 Summary

The full element structure is collected in Table 1.

Condition	$n = m$	$s = v$	$Q_{ns,mv}$
Diagonal	✓	✓	$-\lambda_1 + \Delta Q_{\mu\mu}$
Same employee, different seats	✓	×	$+\lambda_1 - \tilde{P}_{nn} A_{sv}$
Different employees, same seat	×	✓	$+\lambda_2 - \tilde{P}_{nm} A_{ss}$
Different employees, different seats	×	×	$-\tilde{P}_{nm} A_{sv}$

Table 1: Structure of the QUBO matrix elements $Q_{ns,mv}$ by index case. Note $A_{ss} = 0$ by convention, simplifying the third row to $+\lambda_2$.