



WEB TECHNOLOGIES

CSS – Box Model and Position Property

Vinay Joshi


Department of
Computer Science and Engineering

CSS – Box Model and Position Property


Box Model




PES
UNIVERSITY
ONLINE

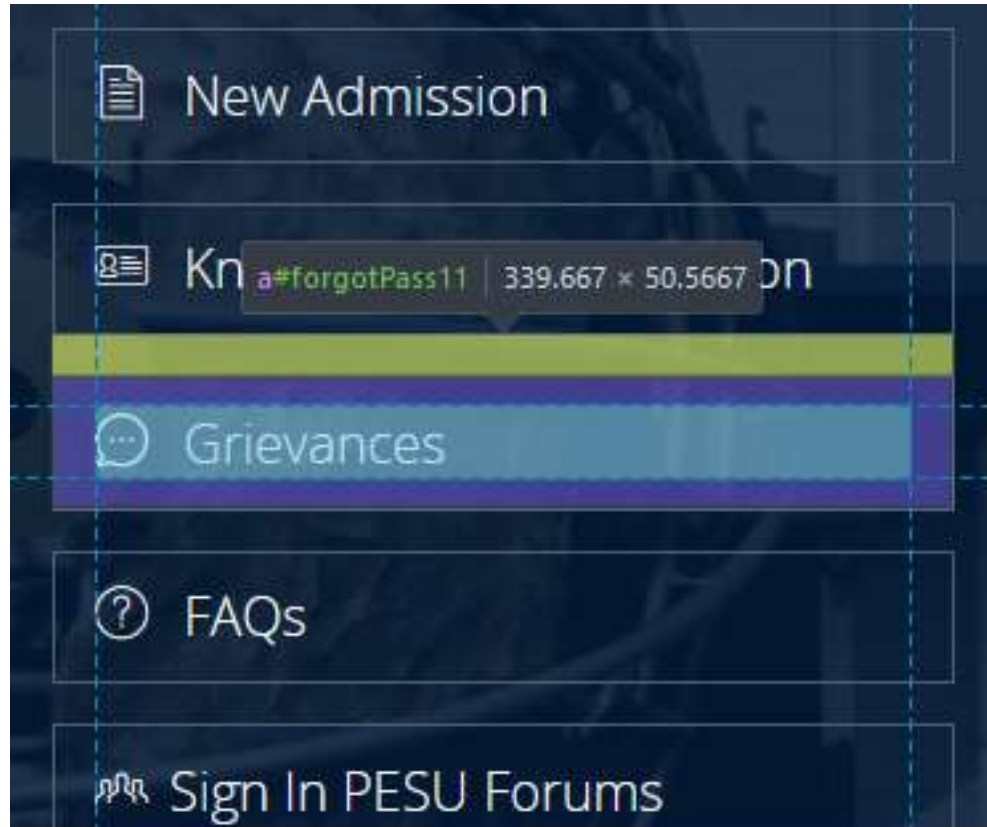

Box Model

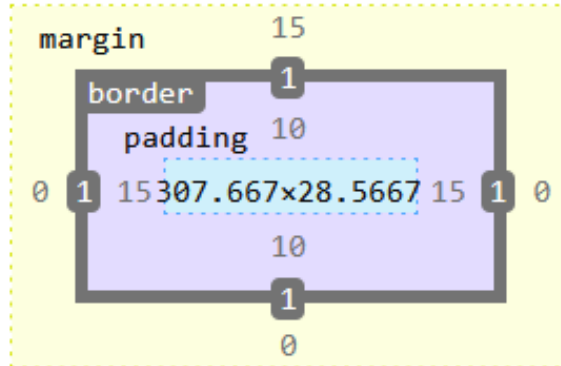


- Every rendered element occupies a box:

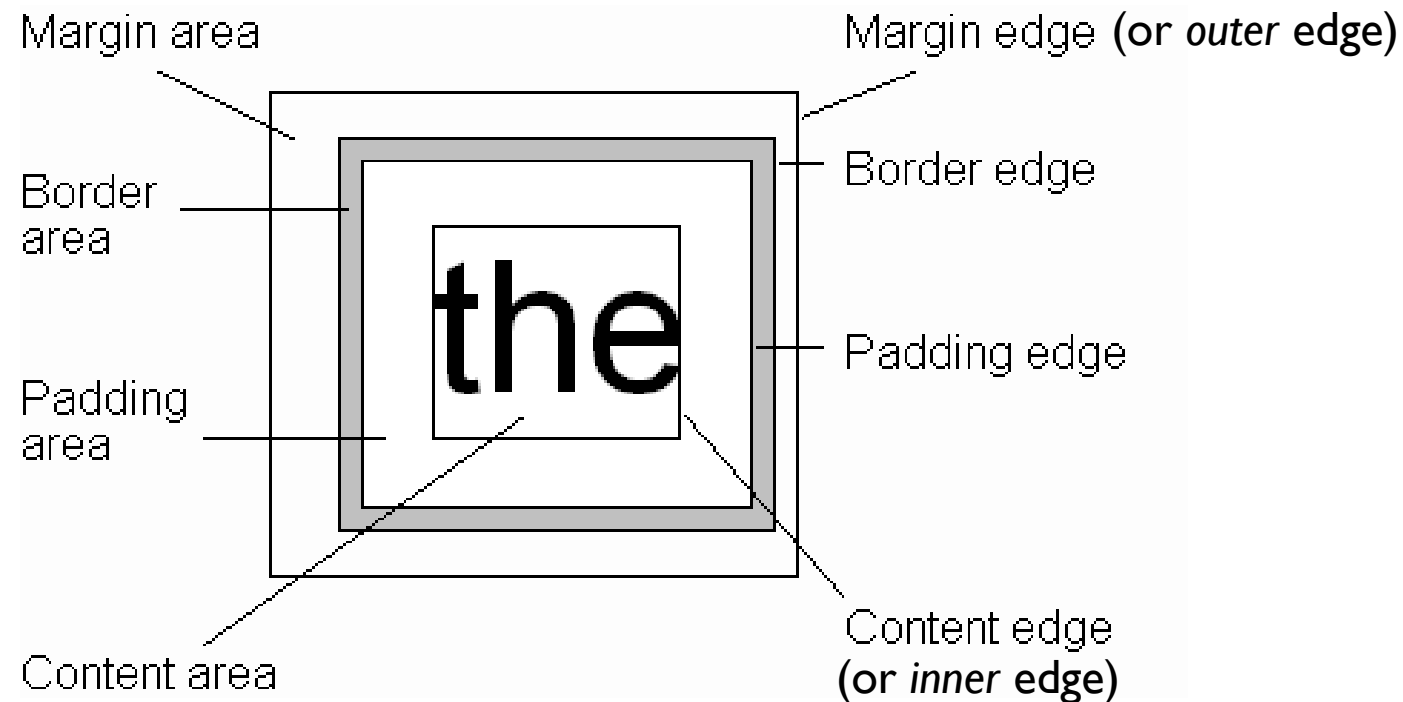

CSS – Box Model and Position Property

Box Model - Components

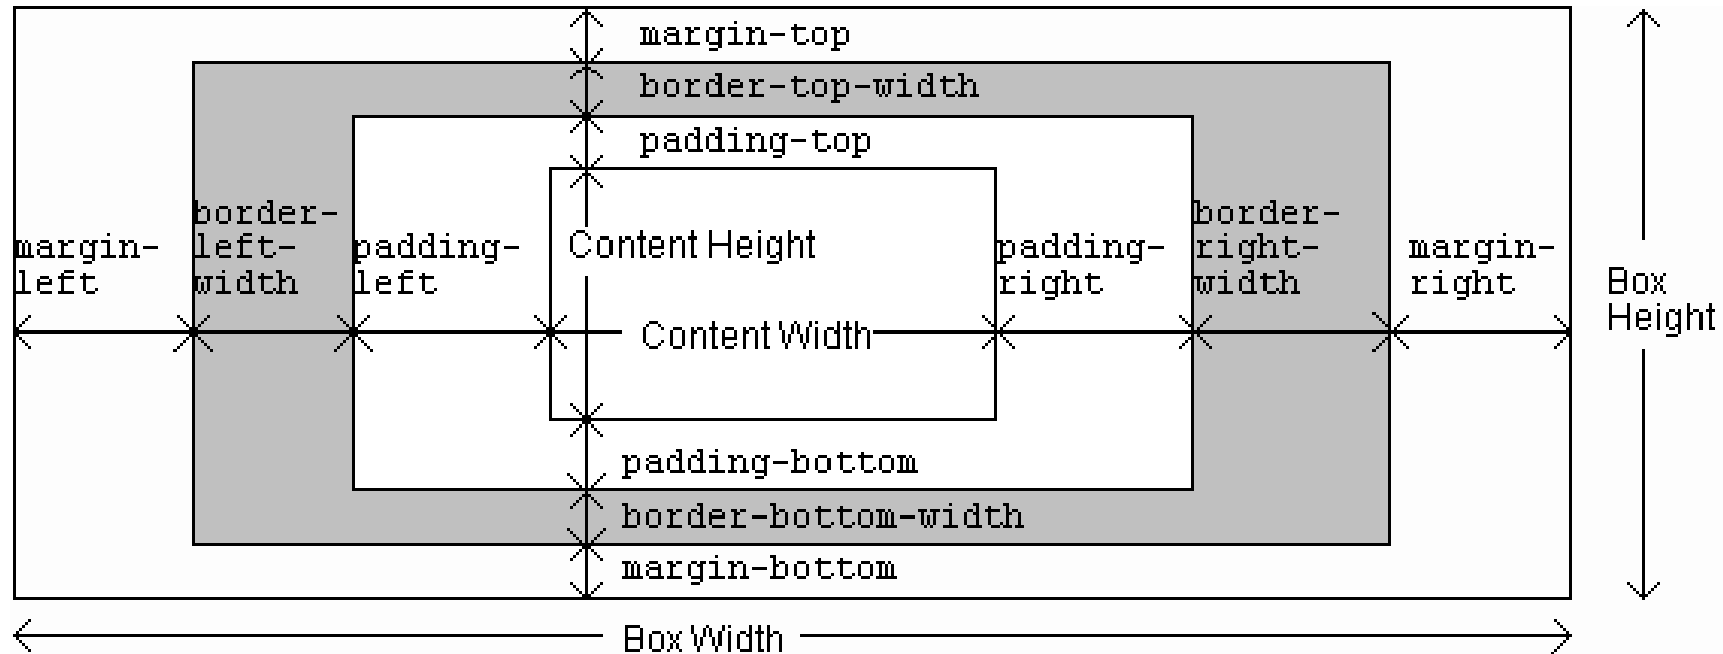

- By default, the browser determines the positioning of each element
- CSS introduced the **position** property and a capability to control how and where page elements are displayed
- Position property values:
 - Absolute
 - Relative
 - Fixed
 - Sticky

- There are two elements used commonly to style specific parts of a webpage
 - ``
 - To apply style to a part of a paragraph
 - `<div>`
 - To apply style to a set of elements or paragraphs



THANK YOU

Vinay Joshi

Department of Computer Science and Engineering

vinayj@pes.edu

+91 80 2672 6622