


Strange Matter Engine

Production study: coupled_map

Direct-inhibition pIC50 | grouped validation | blinded set excluded



Quantity	Result
Validation RMSE	0.8839 pIC50
Fit RMSE	0.8210 pIC50
Generations	250
Dynamical channels	24
Atom feature profile	valence_electronic
CA learning rate	0.003
Ridge penalty	1.0
CA L2	1e-06
Gradient clip	2.0
Confirmation mean RMSE	0.8806
Confirmation seed SD	0.0021

Enhanced CA controls: update scale 0.15, initial-state scale 1.0, support fraction 0.85, bond temperature 2.0. Rule dynamics: A=0.2, B=0.2, C=0.5, D=0.05.

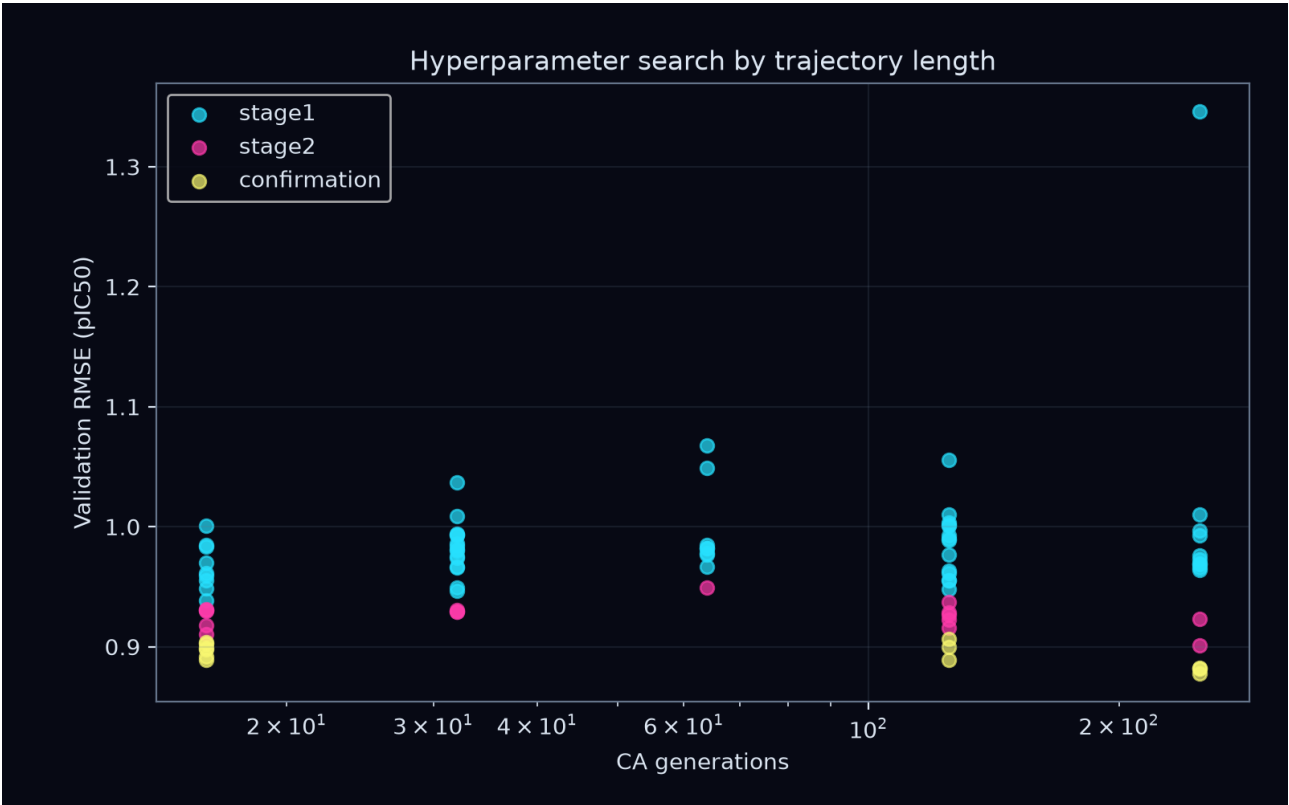

Predictive validation

Model selection used grouped-validation RMSE only. Dynamical-interest scores did not influence promotion.

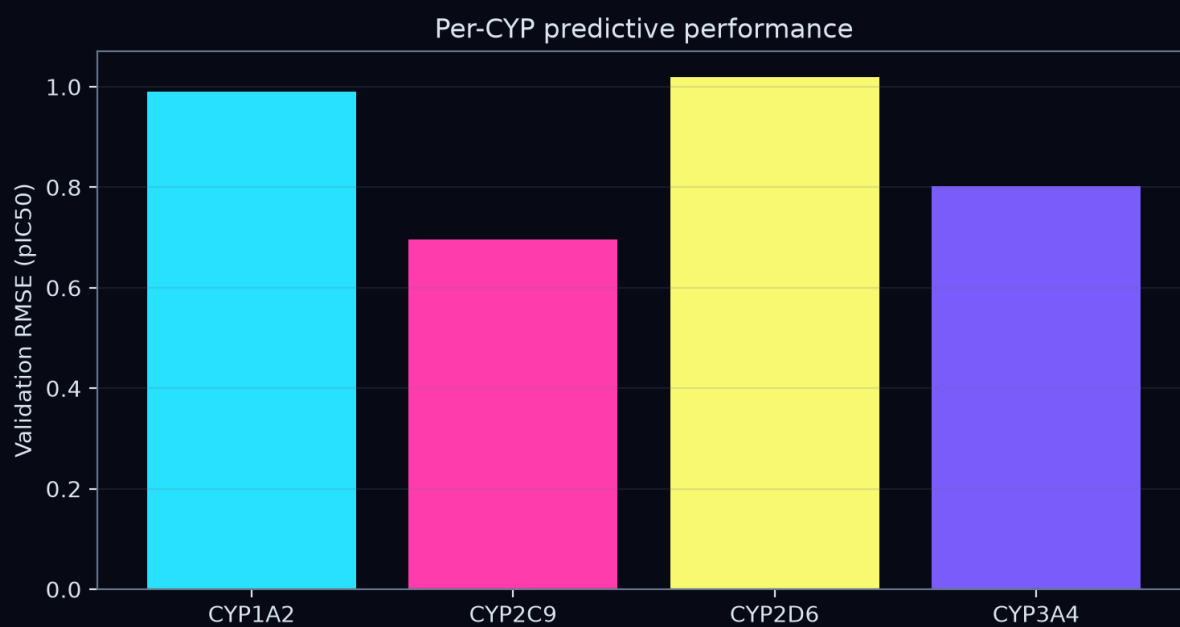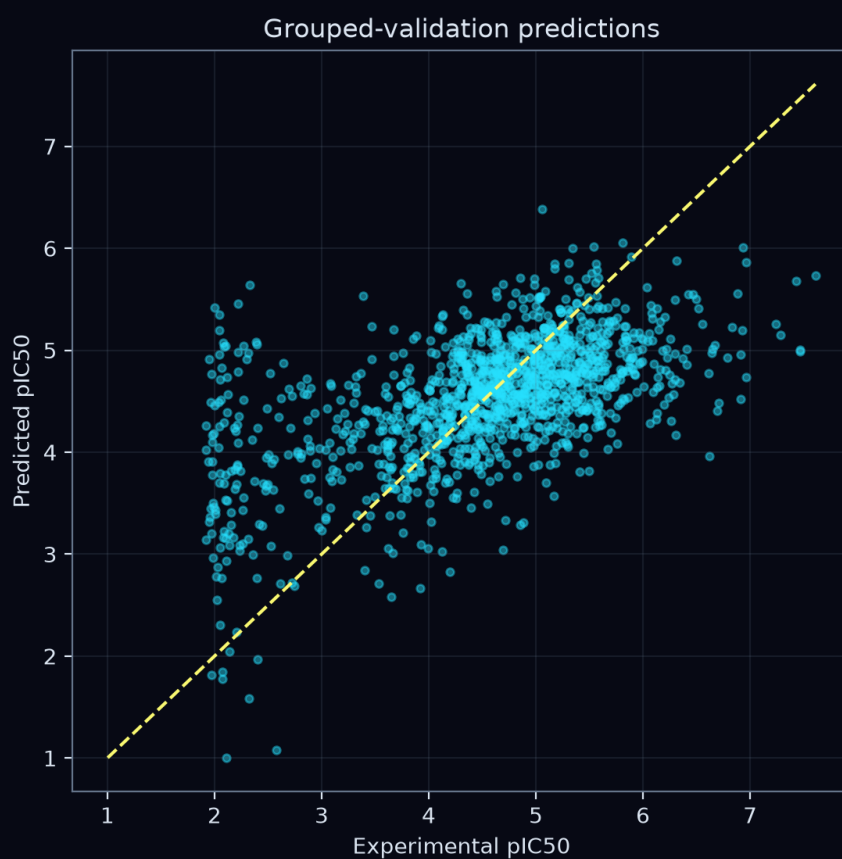


Optimization

Ridge coefficients and the unpenalized intercept were solved from permitted fitting fingerprints. Query error differentiated through the solve into the graph CA; Adam updated only CA parameters. Bond-conditioned messages, cosine learning-rate decay, and multitime trajectory statistics were shared across all five rules.



Emergent dynamics

The validation trajectories were screened for convergence, recurrence, persistent motion, spectral complexity, and perturbation sensitivity. Labels ending in candidate require longer, renormalized and seed-repeated confirmation before any attractor or chaos claim.

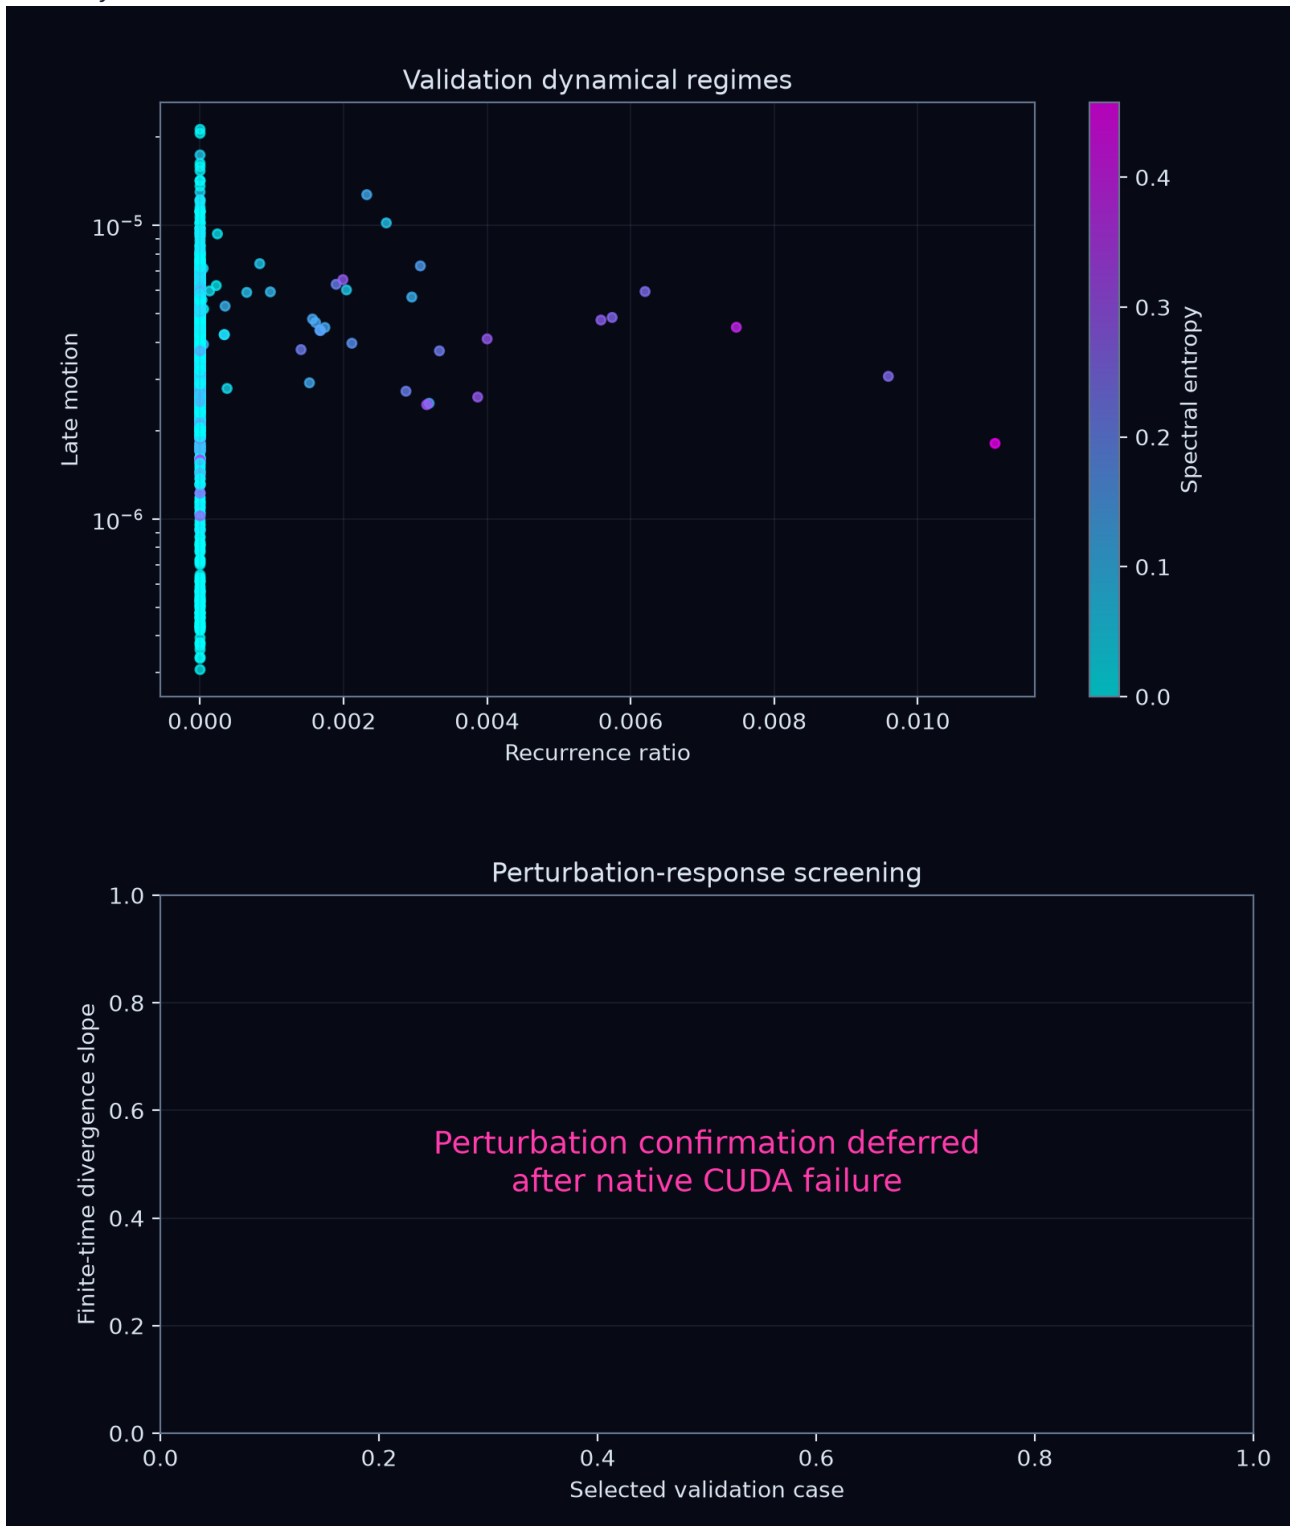

Scientific limitations

This report describes one transition-rule study under the declared grouped split. Hyperparameter selection and early stopping used labelled training data only. The blinded challenge set was not loaded or predicted. Finite-time positive slopes are screening signals rather than proof of a strange attractor or sustained chaos.