

MODULE 7

Exception Handling and Error Management

Robust stream pipelines must handle exceptions gracefully to ensure reliability, data integrity, and uninterrupted processing.





Exception Handling and Error Management in Java

Handle Exceptions Gracefully, Keep Applications Reliable



1. WHAT IS AN EXCEPTION?

An exception is an event that occurs during program execution that disrupts the normal flow of instructions.

Examples:

- Division by zero
- Null pointer reference
- Invalid input
- File not found



2. TYPES OF EXCEPTIONS



Checked Exceptions

Checked at compile time.
Must be handled or declared.

Example: IOException, SQLException



Unchecked Exceptions

Checked at runtime.
Not mandatory to handle.


Example: NullPointerException, ArithmeticException



Errors

Serious problems beyond application control.

Example: OutOfMemoryError, StackOverflowError

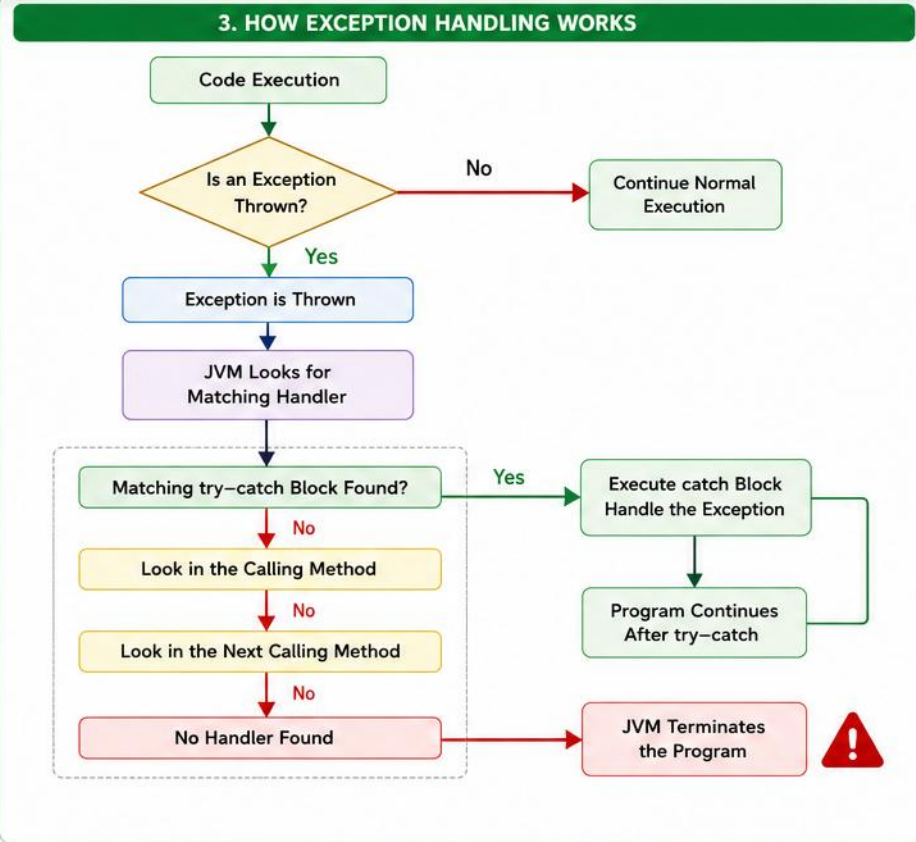

4. KEYWORDS USED

try

Encloses code that might throw an exception.

catch

Catches and handles the exception.

finally

Executes always, whether exception occurs or not.

throw

Explicitly throws an exception.

throws

Declares exceptions that a method might throw.



5. BEST PRACTICES

- ✓ Handle exceptions at the appropriate level.
- ✓ Provide meaningful error messages.
- ✓ Always clean up resources in finally block or try-with-resources.
- ✓ Avoid catching generic Exception.
- ✓ Log exceptions for debugging and monitoring.

6. EXAMPLE

```
try {  
    int result = 10 / 0; // ArithmeticException  
} catch (ArithmeticException e) {  
    System.out.println("Cannot divide by zero: " + e.getMessage());  
} finally {  
    System.out.println("Execution completed");  
}
```



Output:

Cannot divide by zero: / by zero
Execution completed

Explanation:

The exception is caught and handled in the catch block.
The finally block executes regardless.



Remember

Exception handling improves code reliability, user experience, and helps in debugging and maintenance.

Good code anticipates problems and handles them gracefully.

MODULE 7 OVERVIEW

Robust stream pipelines must handle exceptions gracefully to ensure reliability, data integrity, and uninterrupted processing.

LEARNING OBJECTIVES

- 1 Understand exceptions in stream pipelines; handle exceptions within lambda expressions.
- 2 Use try-catch, Optional, and fallback strategies.
- 3 Log and propagate errors effectively; ensure data quality and pipeline resilience.

WHY EXCEPTION HANDLING MATTERS

- Prevents pipeline termination due to bad data; ensures partial success and maximum data throughput.
- Improves reliability and maintainability; provides meaningful error information for debugging.
- Protects downstream systems from invalid data.

KEY TAKEAWAY Streams stop on unhandled exceptions. Handle, log, or propagate — don't ignore. Resilience is key to production pipelines.

WHERE EXCEPTIONS SHOW UP & HOW TO RESPOND

Four common scenarios, and the six habits that keep pipelines resilient.

COMMON EXAMPLES



Parsing Data

- Catch `NumberFormatException` on parse.



Database Access

- Catch `SQLException` on query or update.



File Processing

- Catch `IOException` on file read/write.



Validation

- Validation failures shouldn't halt the pipeline.

BEST PRACTICES

- Handle exceptions close to the source; avoid empty catch blocks; log meaningful error messages with context.
- Use custom exceptions for business rules; ensure pipelines are resilient and idempotent; test error scenarios and edge cases.

KEY TAKEAWAY Let the stream flow for good data and handle the bad data intelligently.

WHY ERROR HANDLING MATTERS

Effective error handling in stream pipelines is essential for building reliable, resilient, and maintainable data systems.

ERRORS ARE INEVITABLE



Real-World Data Is Messy

- Missing values, nulls, invalid formats, unexpected types.



Pipelines Run Long

- One unhandled error can stop the entire pipeline.



Business Impact

- Failures cause delays, wrong reports, loss of trust.

WHAT GOOD ERROR HANDLING DELIVERS

- Higher availability, data quality, and operational efficiency; better user experience.
- Compliance & governance through logging and traceability; scalability with confidence.

KEY TAKEAWAY Handle errors smartly, not just catch them! Turn failures into insights, not outages.



ERROR HANDLING IN JAVA

Handle exceptions gracefully to build robust and reliable applications



ERRORS vs EXCEPTIONS



Errors

- Serious problems that a program should not try to catch.
- Usually related to system failures.
- Examples: `OutOfMemoryError`, `StackOverflowError`



Exceptions

- Conditions that a program can catch and handle.
- Can be checked (compile-time) or unchecked (runtime).
- Examples: `IOException`, `ArithmeticException`


KEY POINTS

- 1 Use `try` to enclose risky code.
- 2 Use `catch` to handle specific exceptions.
- 3 Use `finally` to execute code that must run regardless of exception.
- 4 You can have multiple `catch` blocks.
- 5 Throw meaningful exceptions using `throw` keyword.




Good error handling improves user experience, helps in debugging, and prevents unexpected program crashes.

TRY-CATCH-FINALLY FLOW

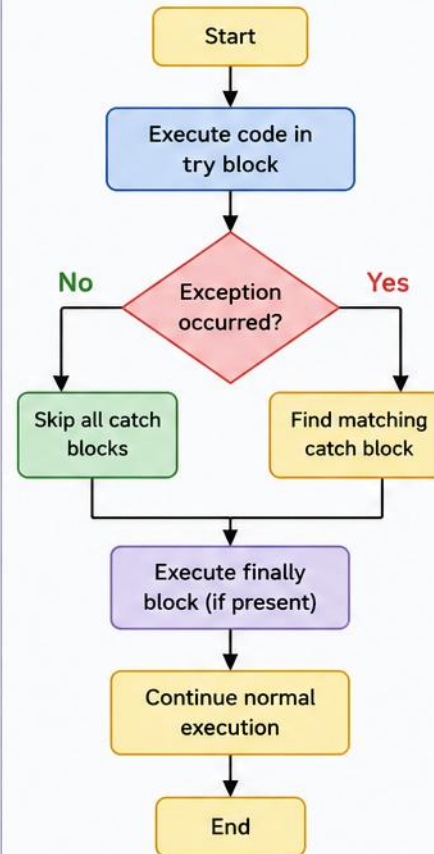

EXCEPTION HIERARCHY

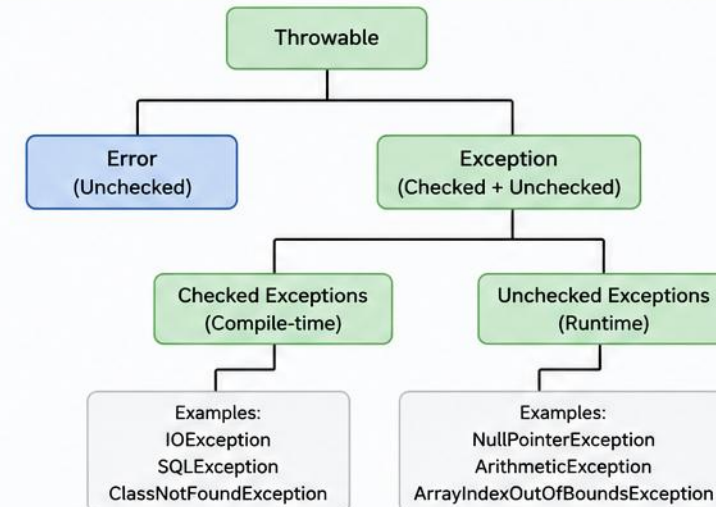

EXAMPLE

```
public class Example {
    public static void main(String[] args) {
        try {
            int result = 10 / 0; // risky code
        } catch (ArithmeticException e) {
            System.out.println("Cannot divide by zero: " + e.getMessage());
        } finally {
            System.out.println("This will always execute.");
        }
    }
}
```

© Dr. Gurinderjeet Kaur

WHAT HAPPENS WITHOUT ERROR HANDLING?

Four consequences of skipping error handling, and five habits that prevent them.

- Pipeline termination — a single exception can stop the entire pipeline.
- Data loss or corruption — inconsistent or incomplete results reach downstream systems.
- Increased downtime and higher operational costs — wasted resources, retries, firefighting.
- Loss of trust — users lose confidence in the accuracy and reliability of data.

BEST PRACTICE IN MIND




KEY TAKEAWAY Error handling is not just about catching exceptions — it's about building resilient pipelines that ensure reliability and business continuity.

JAVA EXCEPTION HIERARCHY


Java exceptions are organized in a hierarchy that helps classify and handle errors appropriately.

THE HIERARCHY

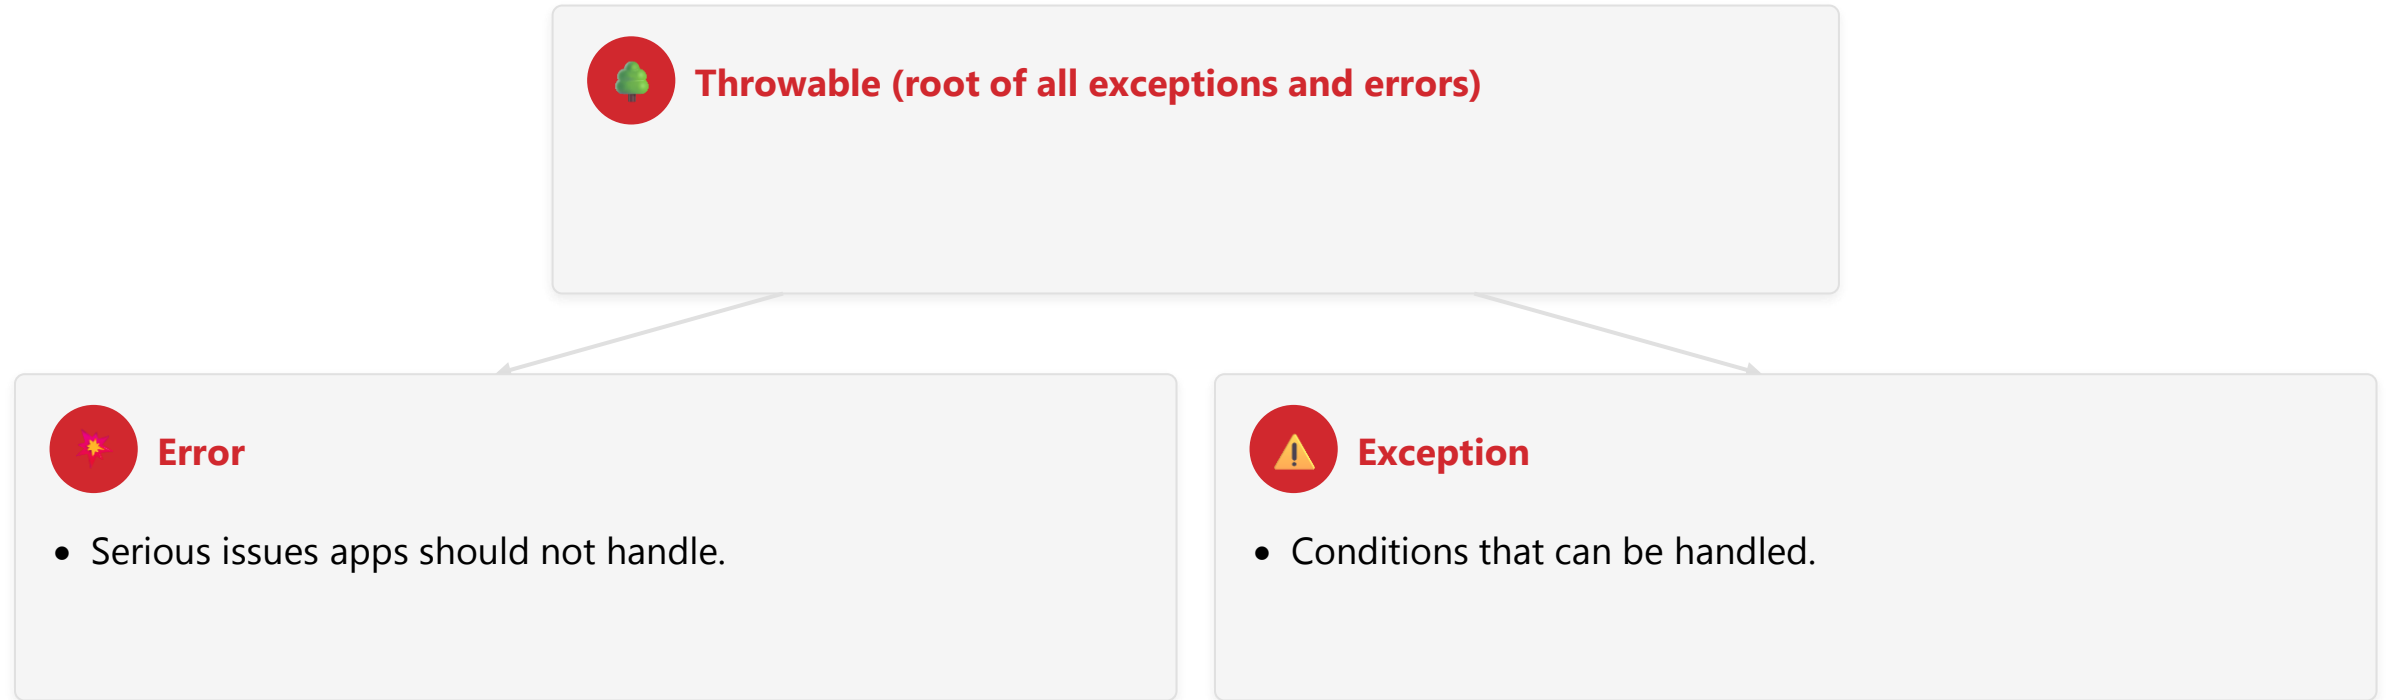

KEY TAKEAWAY Checked exceptions are verified at compile time; unchecked (runtime) exceptions occur at runtime — RuntimeException and its subclasses represent programming errors.

Java Exception Hierarchy

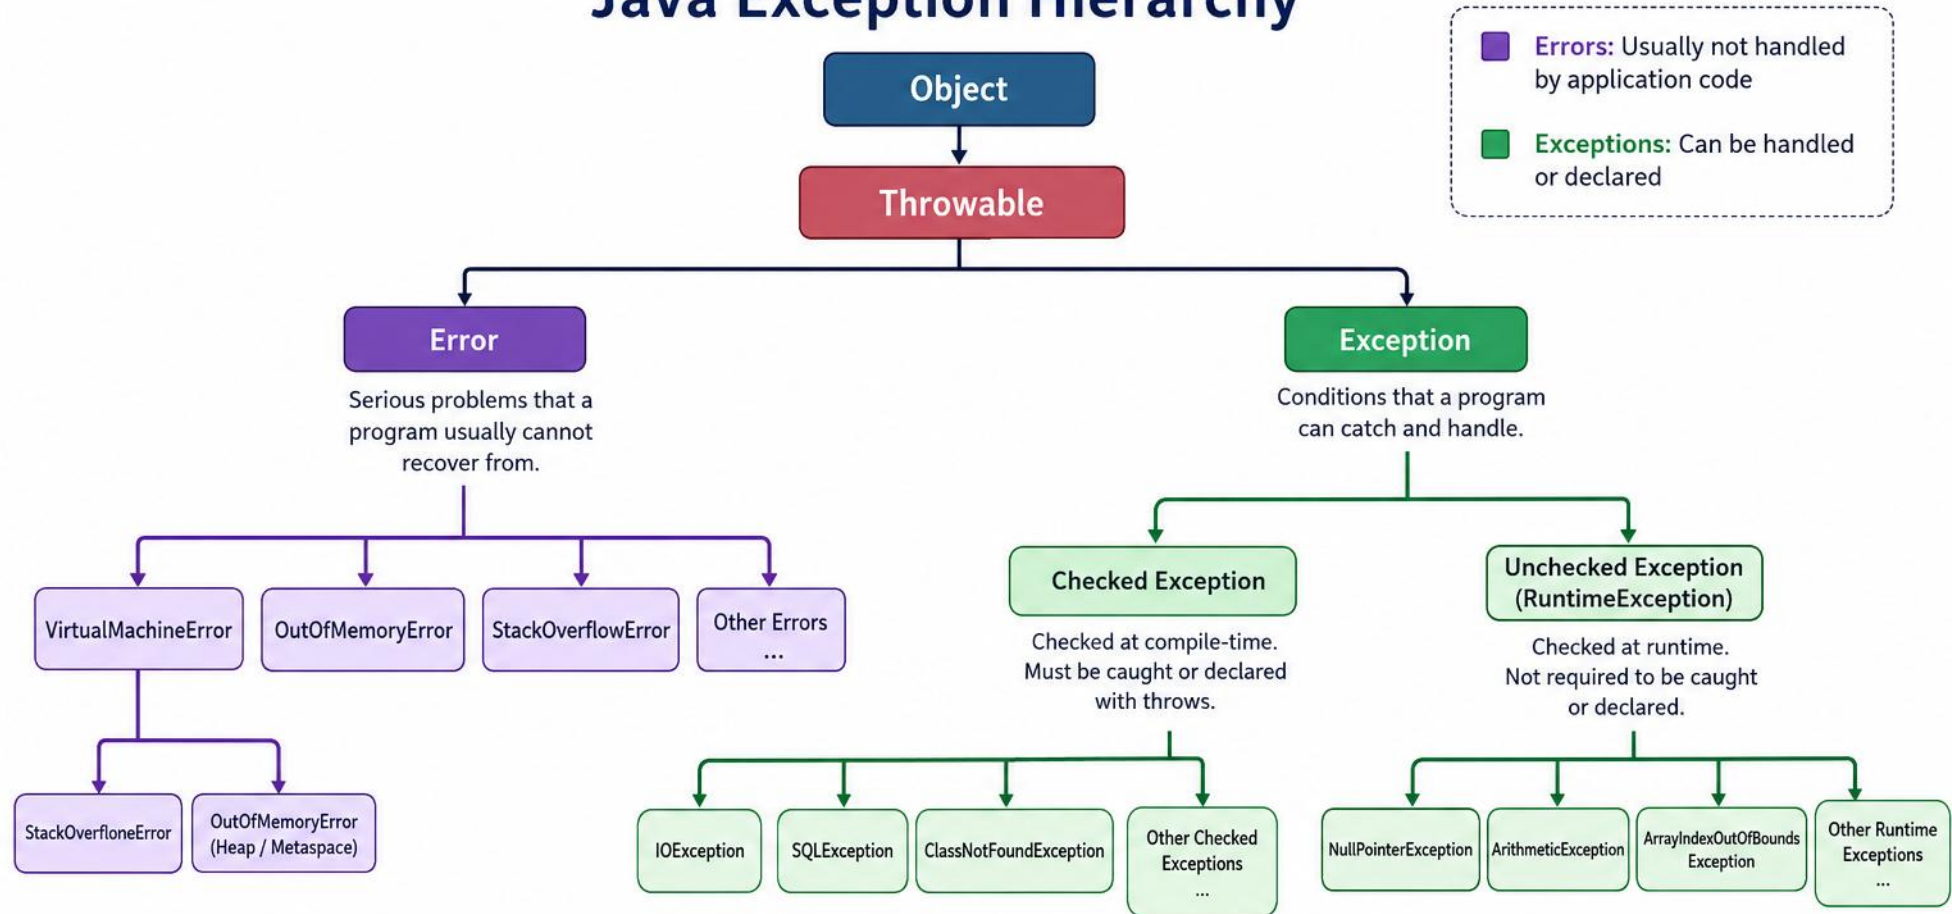

- **Throwable** is the root of the exception hierarchy.
- **Error** represents serious issues that are beyond the control of applications.
- **Exception** represents conditions that applications can handle.
- ✓ **Checked Exceptions** must be caught or declared.
- ✓ **Unchecked Exceptions** (RuntimeException and its subclasses) are not required to be caught or declared.



Best Practice: Handle exceptions gracefully to build robust and reliable applications.

EXCEPTION HIERARCHY — RELEVANCE IN STREAMS

Where hierarchy knowledge actually pays off inside a stream pipeline.

- Exceptions may occur during intermediate or terminal operations.
- Unchecked exceptions (e.g. `NullPointerException`) are common in lambdas.
- Checked exceptions must be handled inside lambdas — try-catch or wrap.
- Proper handling prevents pipeline termination and ensures data integrity.

BEST PRACTICES

- Handle exceptions at the right level; use specific exception types; log meaningful messages with context.
- Don't swallow exceptions silently; keep pipelines clean and resilient.

KEY TAKEAWAY In streams, one unhandled exception can stop the entire pipeline — handle it smartly to keep data flowing.

CHECKED EXCEPTIONS

Verified at compile time — the compiler ensures they are either caught with try-catch or declared with throws.

WHAT ARE CHECKED EXCEPTIONS?

- Checked at compile time; subclasses of Exception (excluding RuntimeException).
- The compiler forces you to handle them — they represent conditions a well-written program can anticipate and recover from.

BENEFITS OF CHECKED EXCEPTIONS



Detect at Compile Time



Improves Reliability



Self-Documenting

Via throws.



Prevents Surprises

At runtime.

KEY TAKEAWAY If a method throws a checked exception, you must either catch it or declare it using throws — the compiler won't let you ignore it!

CHECKED EXCEPTIONS IN JAVA

Checked exceptions are verified at **compile time**.
The compiler enforces that they must be either **caught** or **declared**.

WHAT ARE CHECKED EXCEPTIONS?




Exceptions that are checked by the compiler at compile time.

They are subclasses of **Exception** (excluding **RuntimeException**).

KEY CHARACTERISTICS

- ✓ Checked at compile time.
- ✓ Must be either caught using **try-catch** or declared using **throws**.
- ✓ They represent conditions that a well-written program should handle.
- ✓ They are part of the **Exception** hierarchy (excluding **RuntimeException**).

Throwable

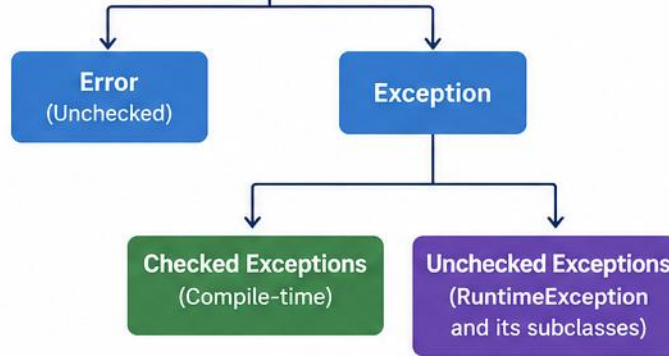

COMMON EXAMPLES



IOException
(when reading/writing files)



SQLException
(database access errors)



URISyntaxException
(invalid URI syntax)



ClassNotFoundException
(class not found at runtime)

HOW TO HANDLE CHECKED EXCEPTIONS

1. HANDLE USING try-catch



Handle the exception inside the method using **try-catch**.

```
import java.io.*;

public class Example {
    public static void main(String[] args) {
        try {
            FileReader fr = new FileReader("data.txt");
            int ch = fr.read();
            System.out.println((char) ch);
            fr.close();
        } catch (IOException e) {
            System.out.println("File not found: " + e.getMessage());
        }
    }
}
```



Declare the exception using **throws** and let the caller handle it.

2. DECLARE USING throws

```
import java.io.*;

public class Example {
    public static void main(String[] args) throws IOException {
        FileReader fr = new FileReader("data.txt");
        int ch = fr.read();
        System.out.println((char) ch);
        fr.close();
    }
}
```



BEST PRACTICE

Handle checked exceptions meaningfully and provide clear messages or recovery options.

Do not ignore or swallow exceptions.

CHECKED EXCEPTIONS — EXAMPLE & HANDLING OPTIONS

Reading a file with FileReader — if IOException isn't caught or declared, the code won't compile.

```
// 1. Handle using try-catch
try {
    FileReader fr = new FileReader("a.txt");
} catch (IOException e) {
    // handle it
}
```

```
// 2. Declare using throws
public void readFile()
    throws IOException {
    // risky code
}
```

- Common checked-exception sources: File I/O, network operations, thread coordination, database access, reflection & class loading, external systems.

KEY TAKEAWAY Checked exceptions help you build reliable pipelines by ensuring anticipated problems are handled deliberately, not left to chance.

UNCHECKED EXCEPTIONS

Occur at runtime — the compiler does not force you to catch or declare them. Subclasses of RuntimeException.

WHAT ARE UNCHECKED EXCEPTIONS?

- Not checked at compile time; subclasses of RuntimeException (and Error).
- Typically indicate programming bugs and runtime problems — the compiler doesn't require catch or declare.

WHY THEY ARE UNCHECKED

- They usually represent programming errors (bugs) in logic, data, or state — the programmer can and should fix the code.
- Forcing catch/declare would add unnecessary boilerplate; fail fast and fix early philosophy.

KEY TAKEAWAY The compiler won't help you with unchecked exceptions — your code quality and testing will!

Unchecked Exceptions in Java

Runtime exceptions that occur due to programming mistakes.

Key Points



Unchecked exceptions are subclasses of **RuntimeException**.



They occur at **runtime**.




Mostly caused by **programming** errors (logic bugs).



Not checked at compile time. No need to catch or declare using **throws**.



If not handled, the program terminates abnormally.

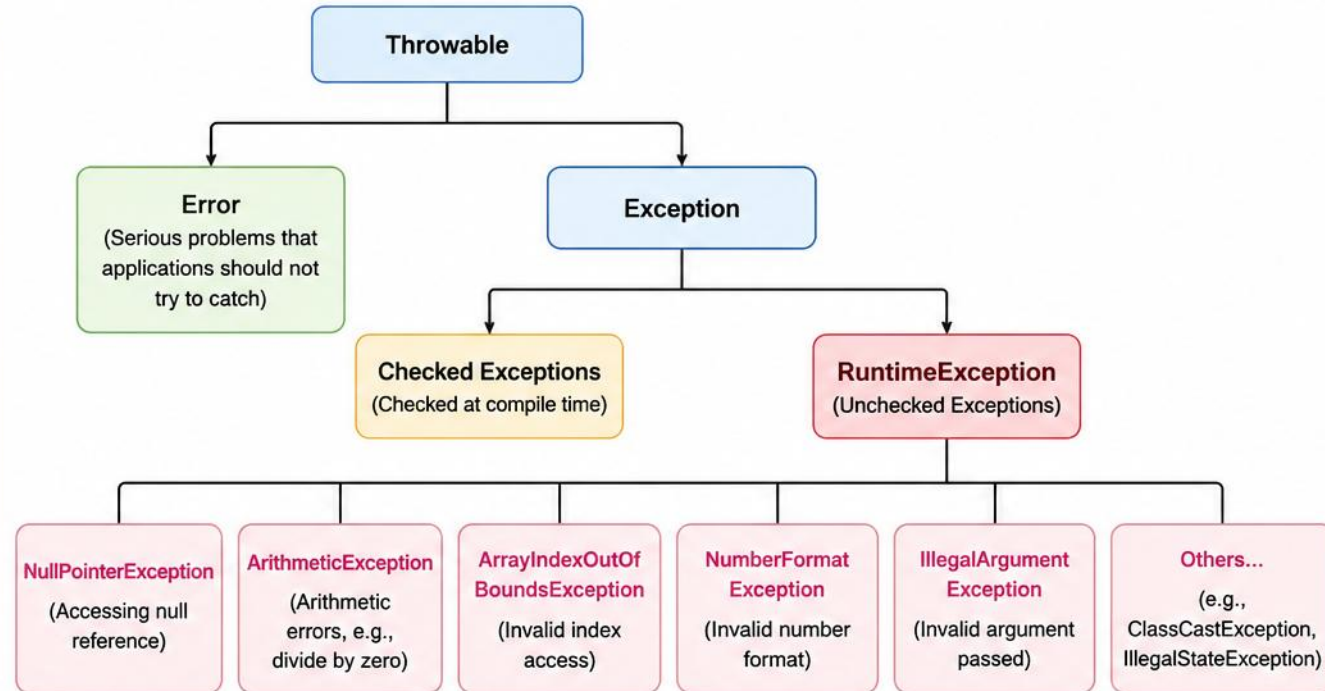

Example

```
public class UncheckedExample {  
    public static void main(String[] args) {  
        String s = null;  
        System.out.println(s.length()); // This will throw NullPointerException  
        int result = 10 / 0;  
        System.out.println(result);    // This will throw ArithmeticException  
    }  
}
```

How to Handle?

- ✓ Use try-catch (recommended for graceful handling).
- ✓ Validate inputs and add proper checks in code.
- ✓ Fix the root cause (these are usually coding mistakes).



Unchecked exceptions are not the compiler's responsibility. They are the **programmer's responsibility!**

UNCHECKED EXCEPTIONS — HANDLING & WHEN THEY OCCUR

Catch defensively, or better yet, prevent them before they happen.

```
// 1. Use try-catch (recommended)
try {
    process(obj);
} catch (NullPointerException e) {
    // handle it
}
```

```
// 2. Validate & prevent
if (obj != null) {
    obj.doWork();
}
```

- Common causes: programming bugs, bad assumptions, edge cases, invalid data/state, external inputs, type mismatch.

KEY TAKEAWAY Unchecked exceptions occur at runtime and usually indicate bugs — handle them proactively to make pipelines robust and reliable.

TRY IT YOURSELF — EXERCISE 1: TRIGGER COMMON EXCEPTIONS

Reinforces: unchecked exceptions, as just covered.



Goal

- Trigger three common runtime exceptions in isolated try blocks, catch each specifically



ArithmeticException

- `int result = 10 / 0;` — division by zero



NullPointerException

- `String value = null; value.length();` — calling a method on null



ArrayIndexOutOfBoundsException

- `values[5]` on a 2-element array — index out of range



Prove

- main continues after each catch — the program doesn't crash



Reference

- `exercises/exercise-01-common-exceptions.md`

TRY IT NOW Complete Exercise 1 before continuing — see `exercises/exercise-01-common-exceptions.md`.

TRY-CATCH BLOCKS

Handle exceptions and maintain the normal flow of the program — preventing abnormal termination.

- A try block contains code that may throw an exception; a catch block catches and handles it.
- The program continues normally after the catch block; multiple catch blocks can handle different exceptions.
- An optional finally block can be used for cleanup code.


TRY-CATCH FLOW



KEY TAKEAWAY Order of execution: try block executes; if an exception occurs, the matching catch runs; finally runs last if present.

Try-Catch Blocks in Java

Handling Exceptions Gracefully

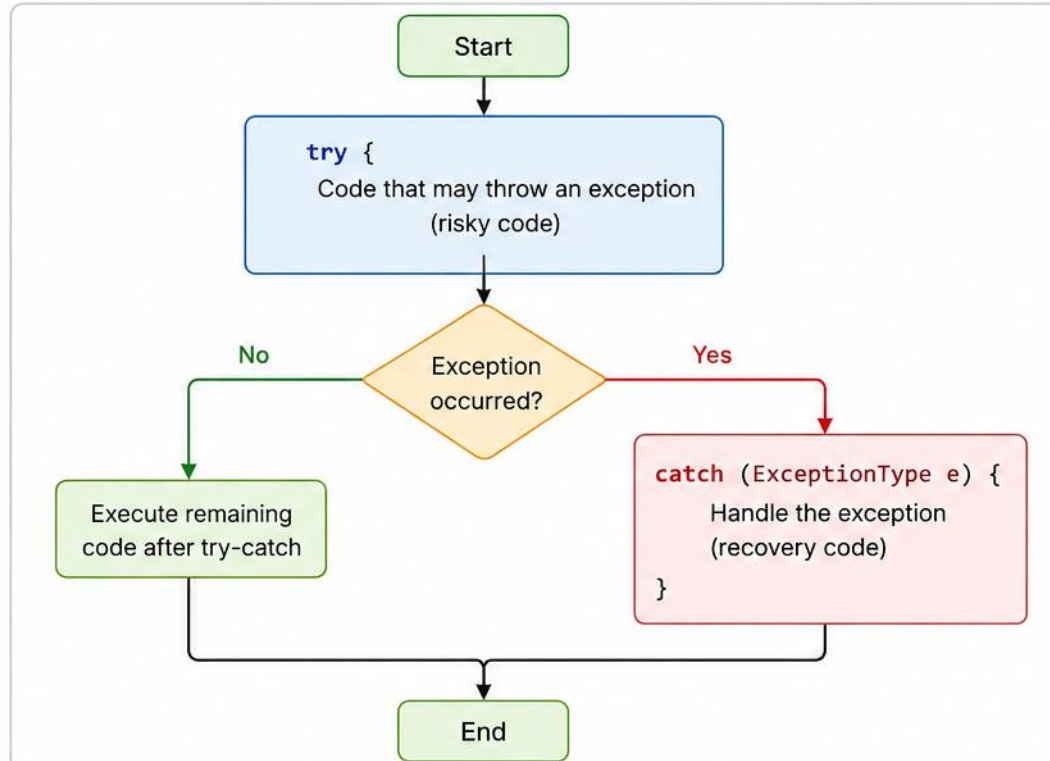

Example

```
try {  
    int result = 10 / 0; // Risky code  
    System.out.println(result);  
} catch (ArithmeticException e) {  
    System.out.println("Cannot divide by zero: " + e.getMessage());  
}  
System.out.println("Program continues...");
```

Try-Catch Structure

```
try {  
    // Code that may throw an exception  
}  
catch (ExceptionType e) {  
    // Code to handle the exception  
}
```

How it Works

- The **try** block contains code that might throw an exception.
- If no exception occurs, the program continues after the **try-catch** block.
- If an exception occurs, the control is immediately transferred to the **catch** block.
- The **catch** block handles the exception and the program continues execution after it.

Key Benefits

- 🛡️ Prevents abnormal program termination
- 🔧 Allows graceful error handling and recovery
- ✅ Improves code robustness and user experience

© Dr. Gurinderjeet Kaur

TRY-CATCH — WORKED EXAMPLE

Multiple catch blocks, ordered from specific to general.

```
Scanner sc = new Scanner(System.in);
try {
    System.out.print("Enter a number: ");
    int num = sc.nextInt();
    int result = 100 / num;
    System.out.println("Result = " + result);
} catch (ArithmeticException e) {
    System.out.println("Cannot divide by zero: " + e.getMessage());
} catch (Exception e) {
    System.out.println("Invalid input: " + e.getMessage());
} finally {
    sc.close();
}
```

KEY TAKEAWAY Specific exceptions must be caught before general ones — if a parent exception is caught first, child exceptions become unreachable.

FINALLY & TRY-CATCH BEST PRACTICES

The finally block always executes — use it for cleanup you can't skip.

FINALLY USE CASES



Closing Files



**Closing DB
Connections**



Releasing Resources



Cleanup Operations

BEST PRACTICES

- Catch specific exceptions first; don't ignore exceptions; log meaningful messages.
- Use finally (or try-with-resources) for cleanup; avoid empty catch blocks.
- Handle exceptions close to the source; test your exception scenarios.

KEY TAKEAWAY Handle exceptions, don't let them handle your application!

FINALLY BLOCK

Executes important cleanup code — runs after try-catch, regardless of whether an exception occurs.

WHAT IS THE FINALLY BLOCK?

- Always executes after try-catch (except rare cases like System.exit() or a JVM crash).
- Used to release resources, close connections, and perform cleanup — only one finally per try statement.

HOW IT WORKS



No Exception

- try (success) → finally → next statement.



Caught

- try (exception) → catch → finally → next.



Not Caught

- try (exception) → finally → propagates to caller.

KEY TAKEAWAY finally runs even if a return statement is used in the try or catch block.

finally Block in Java

The **finally** block always executes after the **try** and **catch** blocks, regardless of whether an exception occurs or not.

Purpose of finally Block



Used to close resources (connections, streams, files, etc.)



Executes cleanup code




Helps in releasing resources even if an exception occurs



Ensures important code runs in all scenarios

Execution Flow

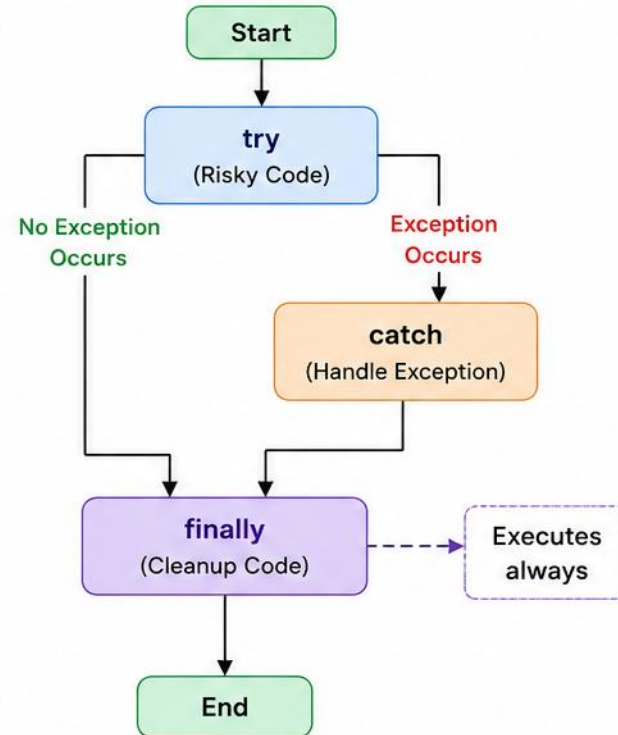

Key Points

- **finally** block is executed whether an exception is handled or not.
- It is executed even if **return** statement is present in **try** or **catch**.
- It runs even if **System.exit()** is called.
- Used mainly for cleanup activities.

Example

```
public class FinallyExample {  
    public static void main(String[] args) {  
        try {  
            int data = 10 / 0; // Exception  
        } catch (ArithmeticException e) {  
            System.out.println("Exception: " + e.getMessage());  
        } finally {  
            System.out.println("Finally block executed");  
        }  
        System.out.println("End of program");  
    }  
}
```

Output

(When Exception Occurs)



```
Exception: / by zero  
Finally block executed  
End of program
```



Remember:

finally block is your safety net – it guarantees that important code runs, always.

FINALLY BLOCK — EXAMPLE & KEY POINTS

A finally block runs whether the division succeeds or throws.

```
try {  
    int result = 10 / 2;  
    System.out.println("Result: " + result);  
} finally {  
    System.out.println("Cleanup done.");  
}  
  
// Output: Result: 5  Cleanup done.
```

- finally executes after try or catch; used for cleanup (files, connections, sockets, streams).
- If an exception occurs in finally, it can override a previous exception; not executed if the JVM exits or crashes.

KEY TAKEAWAY If return is used in try/catch, finally still runs before control actually returns.

FINALLY — COMMON USE CASES & BEST PRACTICES

Where finally shows up most often in real applications.

COMMON USE CASES



File Handling

Close readers/writers.



DB Connections

Close Connection/Statement.



Network Resources

Close sockets, channels.



Synchronization

Release locks, semaphores.


BEST PRACTICES

- Use finally to close or release resources; keep cleanup code in the finally block, not complex logic.
- Handle exceptions inside finally if needed; prefer try-with-resources (Java 7+) for automatic resource management.

KEY TAKEAWAY The finally block guarantees critical cleanup runs — it always executes, so use it wisely!

TRY IT YOURSELF — EXERCISE 2: TRY-CATCH-FINALLY

Reinforces: finally, as just covered.



Goal

- Compare a successful and a failed transfer; confirm cleanup runs after both




Success path

- `transfer(false)` — try block completes, no exception



Failure path

- `transfer(true)` — throws, caught by `catch(IllegalStateException)`



finally

- Runs "Cleanup: release transfer session." on both paths



Key concept

- `finally` always executes, whether the try succeeds, fails, or is caught



Reference

- `exercises/exercise-02-try-catch-finally.md`

TRY IT NOW Complete Exercise 2 before continuing — see `exercises/exercise-02-try-catch-finally.md`.

TRY-WITH-RESOURCES

A try statement that declares one or more resources, automatically closed at the end of the statement.

WHAT IS TRY-WITH-RESOURCES?

- Introduced in Java 7; automatically closes resources implementing AutoCloseable (or Closeable).
- Resources are closed in reverse order of declaration — reduces boilerplate and the risk of resource leaks.

HOW IT WORKS



KEY TAKEAWAY Resources must be declared in the try parentheses and implement AutoCloseable — no explicit close() required in most cases.

try-with-resources in Java

Automatically closes resources that implement **AutoCloseable** (e.g., File, Stream, Connection) at the end of the try block.

SYNTAX

```
try (ResourceType resource = new ResourceType(args)) {  
    // use the resource  
} catch (ExceptionType e) {  
    // handle exception  
} finally {  
    // optional  
}
```



Resource is declared inside the parentheses.


EXAMPLE

```
try (BufferedReader reader = new BufferedReader(  
    new FileReader("input.txt"))) {  
    String line;  
    while ((line = reader.readLine()) != null) {  
        System.out.println(line);  
    }  
} catch (IOException e) {  
    System.out.println("Error reading file: " + e.getMessage());  
}
```



reader is automatically closed at the end of the try block, whether an exception occurs or not.

HOW IT WORKS

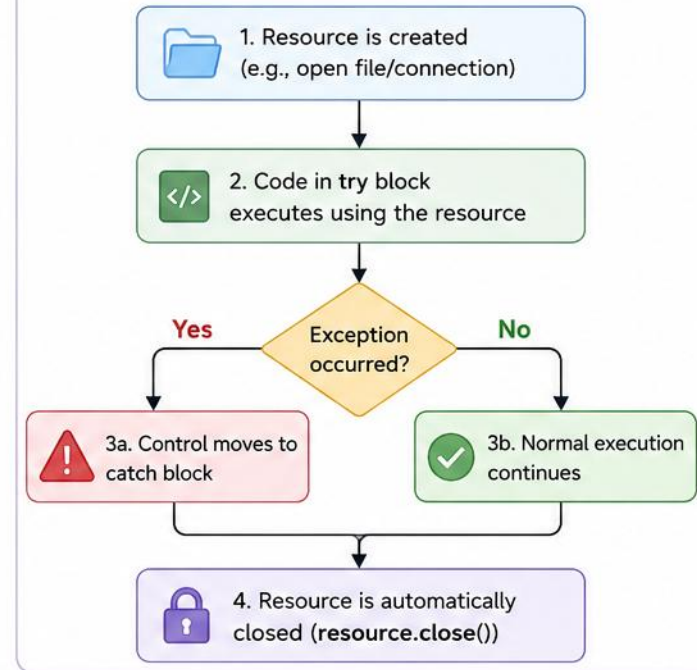

BENEFITS

- ✓ Ensures resources are closed automatically.
- ✓ Prevents resource leaks.
- ✓ Cleaner and more concise code.
- ✓ Works with any resource that implements **AutoCloseable**.



TRY-WITH-RESOURCES — EXAMPLE

Reading a file — the `BufferedReader` closes automatically, even if an exception occurs.

```
try (BufferedReader br =  
    new BufferedReader(new FileReader("a.txt"))) {  
    String line;  
    while ((line = br.readLine()) != null) {  
        System.out.println(line);  
    }  
} catch (IOException e) {  
    e.printStackTrace();  
}
```

KEY POINT: if an exception occurs while closing resources, the exception from the try block is preserved, and the closing exception is suppressed.

KEY TAKEAWAY Multiple resources can be declared in the same try — they close in reverse order automatically.

TRY-WITH-RESOURCES — BENEFITS & WHEN TO USE

Any resource that must be closed after use is a candidate.

BENEFITS



Automatic Management

No manual close() calls.



Cleaner Code

More readable, less boilerplate.



Fewer Leaks

Less chance of forgetting to close.



Handles Close Exceptions

Automatically, safely.

WHEN TO USE

- Files, database connections, sockets, streams, and any other Closeable resource.
- Best practices: declare resources in the try parentheses, keep the try block focused on core logic, avoid returning from inside try with open resources.

KEY TAKEAWAY Let Java handle the closing — focus on your business logic! Clean code is reliable code.

TRY IT YOURSELF — EXERCISE 3: TRY-WITH-RESOURCES

Reinforces: try-with-resources, as just covered.



Goal

- Read a small file with `BufferedReader` in `try-with-resources` — no manual `close()`



Setup

- `Files.writeString()` creates `transactions.txt` with two lines



Read

- `try (BufferedReader reader = Files.newBufferedReader(file)) { ... }`



Auto-close

- `reader.close()` runs automatically when the `try` block exits



Key concept

- Any `AutoCloseable` resource closes itself, even if an exception is thrown



Reference

- `exercises/exercise-03-try-with-resources.md`

TRY IT NOW Complete Exercise 3 before continuing — see `exercises/exercise-03-try-with-resources.md`.

THROW AND THROWS KEYWORDS

throw explicitly throws an exception; throws declares in a method signature what a method may throw.



- Used inside a method to throw an exception object explicitly.
- Followed by an exception object.
- Control transfers to the nearest catch block.



- Used in the method signature to declare exceptions the method may throw.
- Passes responsibility to the caller.
- Can declare multiple exceptions, comma-separated.

KEY TAKEAWAY throws does not throw the exception — it just passes the responsibility to the caller.



Java throw and throws Keywords

Both are used in exception handling but serve different purposes.

throw



The **throw** keyword is used to **explicitly** throw an exception from a method or a block.

How it works



Example

```
public void validateAge(int age) {  
    if (age < 18) {  
        throw new IllegalArgumentException("Age must be 18 or above");  
    }  
    System.out.println("Age is valid");  
}
```




- Creates an exception object and throws it.
- Transfers control to the nearest **catch** block.

throws



The **throws** keyword is used in a method signature to declare that the method may throw one or more exceptions. It **does not throw** the exception; it passes the responsibility to the caller.

How it works



Example

```
import java.io.*;  
  
public void readFile() throws IOException {  
    FileReader fr = new FileReader("file.txt"); // may throw IOException  
    BufferedReader br = new BufferedReader(fr);  
}
```



- Does not create or throw the exception.
- Declares the exception so the **caller** must handle it.

Key Differences

Aspect	throw	throws
Purpose	Explicitly throws an exception.	Declares that a method may throw an exception.
Where Used	Inside method or block.	In method signature.
Action	Creates and throws an exception object.	Does not throw; passes responsibility to the caller.
Number of Exceptions	Throws one exception at a time.	Can declare multiple exceptions.
Example	<code>throw new IOException("Error occurred");</code>	<code>public void read() throws IOException, FileNotFoundException</code>



Best Practice

- Use **throw** when you want to raise an exception manually.
- Use **throws** when a method might encounter an exception that it cannot handle and wants the caller to handle it.



In short: **throw** = you throw it now, **throws** = I may throw it, you handle it.

THROW AND THROWS — COMBINED EXAMPLE

A method that declares a checked exception, and explicitly throws it.

```
public void withdraw(double amount) throws InsufficientFundsException {  
    if (amount > balance) {  
        throw new InsufficientFundsException(  
            "Insufficient balance for withdrawal");  
    }  
    balance -= amount;  
}
```

- If a method calls another method that throws a checked exception, it must either handle it or declare it using throws.

KEY TAKEAWAY throws is mandatory for unhandled checked exceptions; unchecked exceptions (RuntimeException and subclasses) never need to be declared.

THROW VS THROWS — KEY POINTS & BEST PRACTICES

"I create the exception and hand it over now" vs. "I inform the caller that I might throw it."

- Use throw to raise an exception explicitly; use throws to declare exceptions in the method signature.
- Throw meaningful exceptions with clear messages; declare only necessary exceptions.


COMMON EXCEPTIONS USED WITH THROW

- IllegalArgumentException · IllegalStateException · FileNotFoundException · IOException · NullPointerException.

KEY TAKEAWAY Handle exceptions at the appropriate level; avoid catching exceptions just to rethrow them without adding value.

TRY IT YOURSELF — EXERCISE 4: THROW VS THROWS

Reinforces: throw and throws, as just covered.



Goal

- Distinguish actively throwing an exception from declaring one may propagate



throw

- `validateAmount(-10)` — `throw new IllegalArgumentException(...)` fires now



throws

- `String loadPolicy(Path)` throws `IOException` — declares a checked contract



Difference

- `throw` raises one exception; `throws` is a method-signature declaration



Key concept

- `throws` never fires anything by itself — it only documents what might propagate



Reference

- `exercises/exercise-04-throw-throws.md`

TRY IT NOW Complete Exercise 4 before continuing — see `exercises/exercise-04-throw-throws.md`.

CREATING CUSTOM EXCEPTIONS

User-defined exception classes that make error handling more meaningful and business-specific.

WHAT ARE CUSTOM EXCEPTIONS?

- Represent specific error conditions with more meaningful information than generic exceptions.
- Must extend Exception (checked) or RuntimeException (unchecked).

HOW TO CREATE ONE


- 1 Create a class — extend Exception or RuntimeException.
- 2 Add constructors — default, message, cause, or both.
- 3 (Optional) add custom fields relevant to the error.
- 4 Throw it with throw; handle it with try-catch.

KEY TAKEAWAY Always provide meaningful error messages and include relevant context, like IDs or values.

Creating Custom Exceptions in Java

Custom exceptions help create meaningful, domain-specific error handling.

STEPS TO CREATE A CUSTOM EXCEPTION

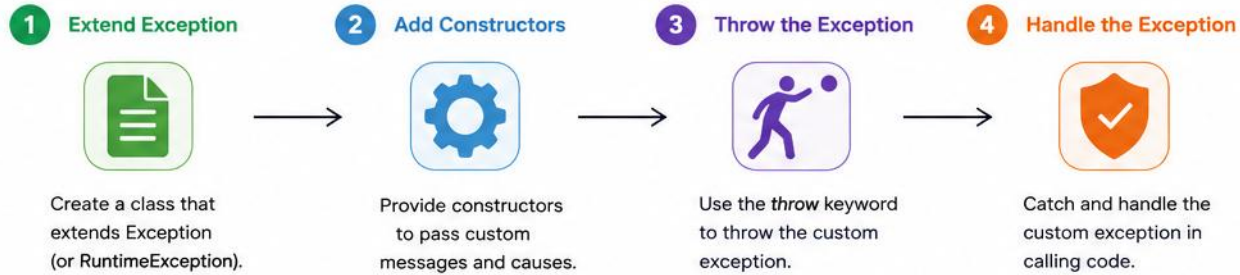


EXAMPLE: CUSTOM CHECKED EXCEPTION

```
// 1. Create Custom Exception
public class InsufficientBalanceException extends Exception {
    public InsufficientBalanceException() {
        super("Insufficient balance in account.");
    }
    public InsufficientBalanceException(String message) {
        super(message);
    }
    public InsufficientBalanceException(String message, Throwable cause) {
        super(message, cause);
    }
}
```

```
// 2. Throw Custom Exception
public class BankService {
    public void withdraw(double amount, double balance)
        throws InsufficientBalanceException {
        if (amount > balance) {
            throw new InsufficientBalanceException(
                "Cannot withdraw " + amount +
                ". Available balance: " + balance
            );
        }
        // process withdrawal
    }
}
```

EXCEPTION HIERARCHY (Simplified)

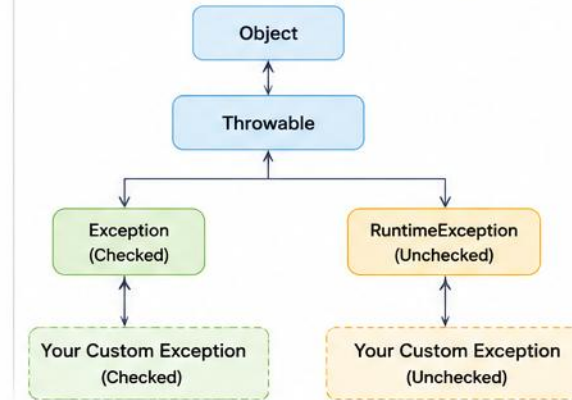

3. Handle Custom Exception

```
public class Main {
    public static void main(String[] args) {
        BankService service = new BankService();

        try {
            service.withdraw(1000, 500);
        } catch (InsufficientBalanceException ex) {
            System.out.println("Error: " + ex.getMessage());
        }
    }
}
```

BEST PRACTICES



- Use meaningful names that describe the error.
- Provide clear and helpful error messages.
- Provide multiple constructors (no-arg, message, cause).
- Extend Exception for checked exceptions (recoverable conditions).
- Extend RuntimeException for unchecked exceptions (programming errors).



WHEN TO USE CUSTOM EXCEPTIONS?

- When built-in exceptions do not clearly describe the problem.
- To represent domain-specific error conditions.
- To improve code readability and error handling.

Examples:

- InvalidAgeException
- InsufficientBalanceException
- OrderNotFoundException
- InvalidLoginException



Key Takeaway: Custom exceptions make your code more expressive, maintainable, and easier to debug by providing meaningful error information.

CUSTOM EXCEPTION — CLASS & USAGE

A checked custom exception that carries a business-relevant field.

```
// Checked Custom Exception
public class InvalidAgeException extends Exception {
    private int age;
    public InvalidAgeException(String message, int age) {
        super(message);
        this.age = age;
    }
    public int getAge() { return age; }
}
```

- Common constructors: default, (String message), (String message, Throwable cause), plus any custom fields you add.

KEY TAKEAWAY Custom exceptions make code more expressive — they communicate the exact problem to the caller.

CUSTOM EXCEPTIONS — WHEN TO USE & CHECKED VS UNCHECKED

Three named examples, and the decision that shapes their design.

EXAMPLES

**InsufficientBalanceException**
User balance too low.

**InvalidOrderException**
Order data is invalid.

**ResourceNotFoundException**
Resource not found.

	CHECKED (extends Exception)	UNCHECKED (extends RuntimeException)
Use when	Caller can reasonably recover	Programming error / not recoverable

KEY TAKEAWAY Choose between checked and unchecked wisely; keep exception classes simple, focused, and well documented in Javadoc.

TRY IT YOURSELF — EXERCISE 5: CUSTOM CHECKED EXCEPTION

Reinforces: creating custom exceptions, as just covered.



Goal

- Model insufficient balance as a meaningful checked domain exception



File

- `InsufficientFundsException.java` extends `Exception`



Context

- Preserves balance and requested amount as structured fields




Message

- `"Insufficient funds: balance=%.2f, requested=%.2f".formatted(...)`



Key concept

- A checked custom exception forces callers to acknowledge a real domain failure



Reference

- `exercises/exercise-05-custom-exception.md`

TRY IT NOW Complete Exercise 5 before continuing — see `exercises/exercise-05-custom-exception.md`.

EXCEPTION PROPAGATION

An unhandled exception is passed up the call stack until it is caught or the program terminates.

- If a method doesn't handle an exception, it's passed to its caller — this continues up the call stack.
- Helps avoid duplicate handling code at every level and encourages centralized exception handling.


HOW PROPAGATION WORKS



KEY TAKEAWAY If no method handles the exception, the default exception handler terminates the program.

EXCEPTION PROPAGATION IN JAVA

When an exception occurs, it is thrown from the current method and propagated up the **call stack** until it is caught.

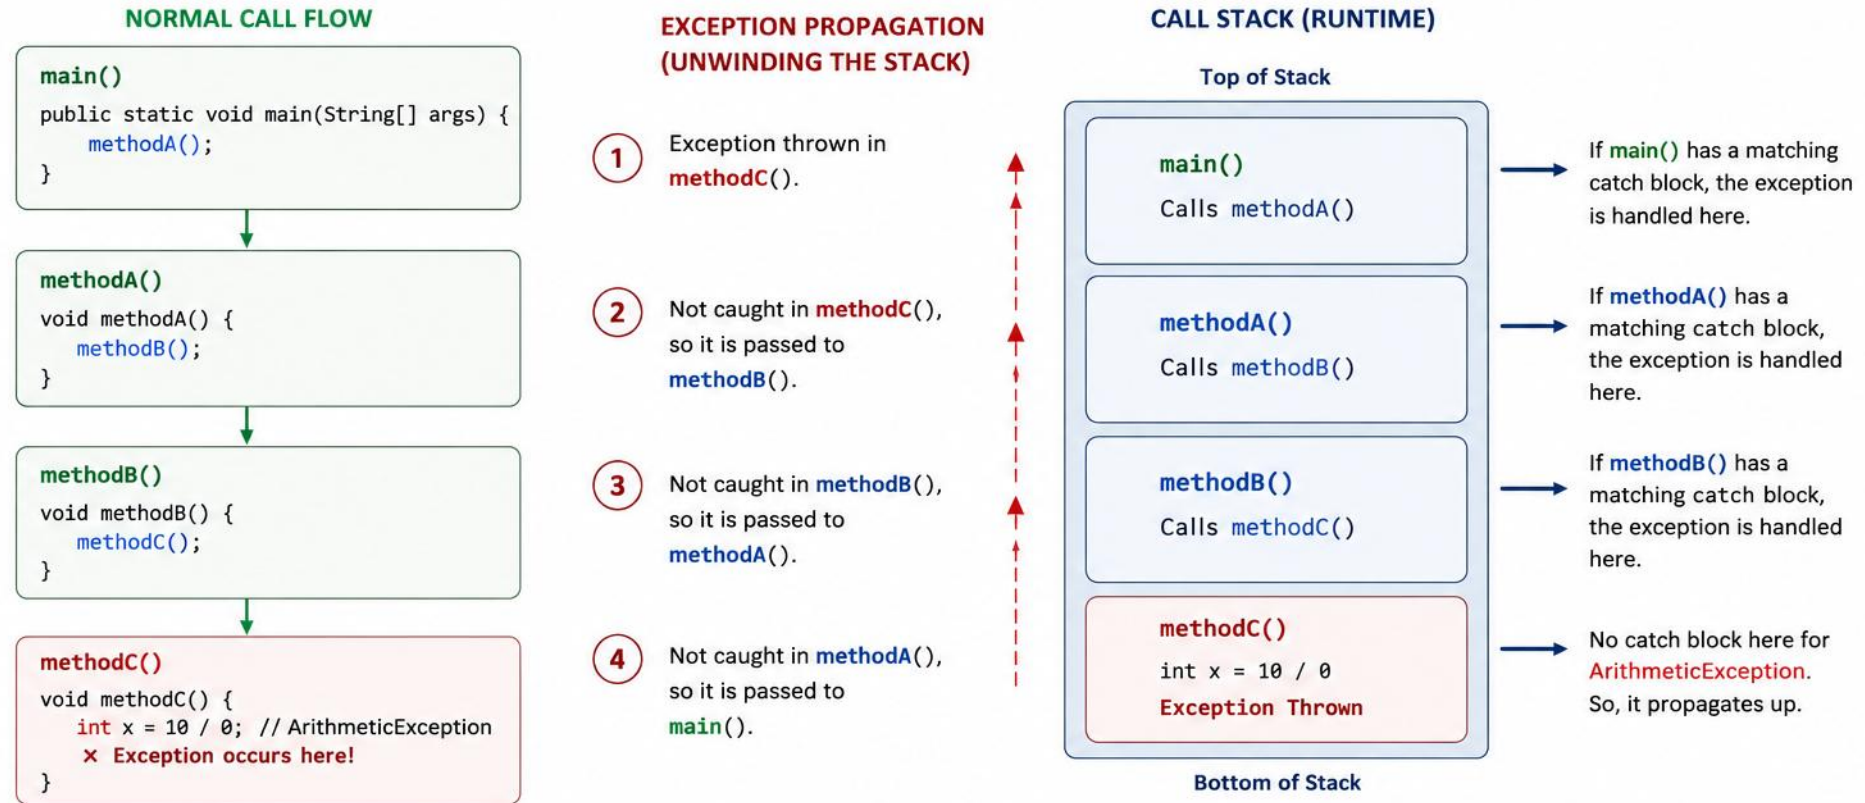

KEY POINTS

- When an exception occurs, Java creates an exception object and looks for a matching catch block.
- If not found in the current method, the exception is passed back to the caller.
- This continues up the call stack until it is caught.
- If no method handles it, the program terminates and the default exception handler prints the stack trace.

EXAMPLE OUTPUT (IF NOT CAUGHT)

```
Exception in thread "main" java.lang.ArithmeticException: / by zero
    at com.example.MyClass.methodC(MyClass.java:15)
    at com.example.MyClass.methodB(MyClass.java:10)
    at com.example.MyClass.methodA(MyClass.java:6)
    at com.example.MyClass.main(MyClass.java:3)
```

PROPAGATION — CODE EXAMPLE & RULES

The classic three-method chain, ending in main().

```
void methodC() { int x = 10 / 0; }           // throws here
void methodB() { methodC(); }               // doesn't handle
void methodA() { methodB(); }               // doesn't handle
public static void main(String[] args) {
    try { new App().methodA(); }
    catch (ArithmeticException e) { /* handled here */ }
}
```

- Propagation moves up the call stack, one method at a time; if a method catches it, propagation stops there.
- Only if a method doesn't catch the exception is it propagated further; if no method catches it, the JVM handles it.

KEY TAKEAWAY Output: Exception handled in main(): java.lang.ArithmeticException: / by zero.

EXCEPTION PROPAGATION — BEST PRACTICES

Seven habits for propagating exceptions cleanly instead of just passing them along.

- Handle exceptions where you can meaningfully recover; don't catch exceptions only to rethrow them without adding value.
- Provide clear error messages; log the exception before rethrowing or exiting.
- Use custom exceptions to add context when propagating.
- Avoid catching Exception or Throwable unless necessary; let unexpected exceptions propagate to a global handler.

KEY TAKEAWAY If you don't handle it, it will keep climbing until someone does!

TRY IT YOURSELF — EXERCISE 6: EXCEPTION PROPAGATION

Reinforces: exception propagation, as just covered.



Goal

- Trace a checked exception from account layer → service → menu → main



accountLayer()

- throws `InsufficientFundsException` — the origin of the failure



serviceLayer(), menuLayer()

- Both just declare throws and let it propagate untouched



Catch point

- Only main catches it — the one true recovery boundary



Key concept

- Catch only where you can meaningfully recover, not at every layer



Reference

- [exercises/exercise-06-propagation.md](#)

TRY IT NOW Complete Exercise 6 before continuing — see [exercises/exercise-06-propagation.md](#).

ERROR HANDLING STRATEGIES

Approaches to detect, manage, and recover from errors so applications stay robust, reliable, and user-friendly.



KEY PRINCIPLES

- Understand what can go wrong; handle appropriately by choosing the right strategy; be consistent — follow standard patterns.
- Don't hide errors — log and escalate when needed; put the user first with meaningful messages.
- Recover or fail — the system should either recover or fail safely.


KEY TAKEAWAY Good error handling is not just about catching errors — it's about building trust, reliability, and a great user experience.



ERROR HANDLING STRATEGIES IN JAVA



Goal: Detect errors, handle them gracefully, and maintain normal application flow.

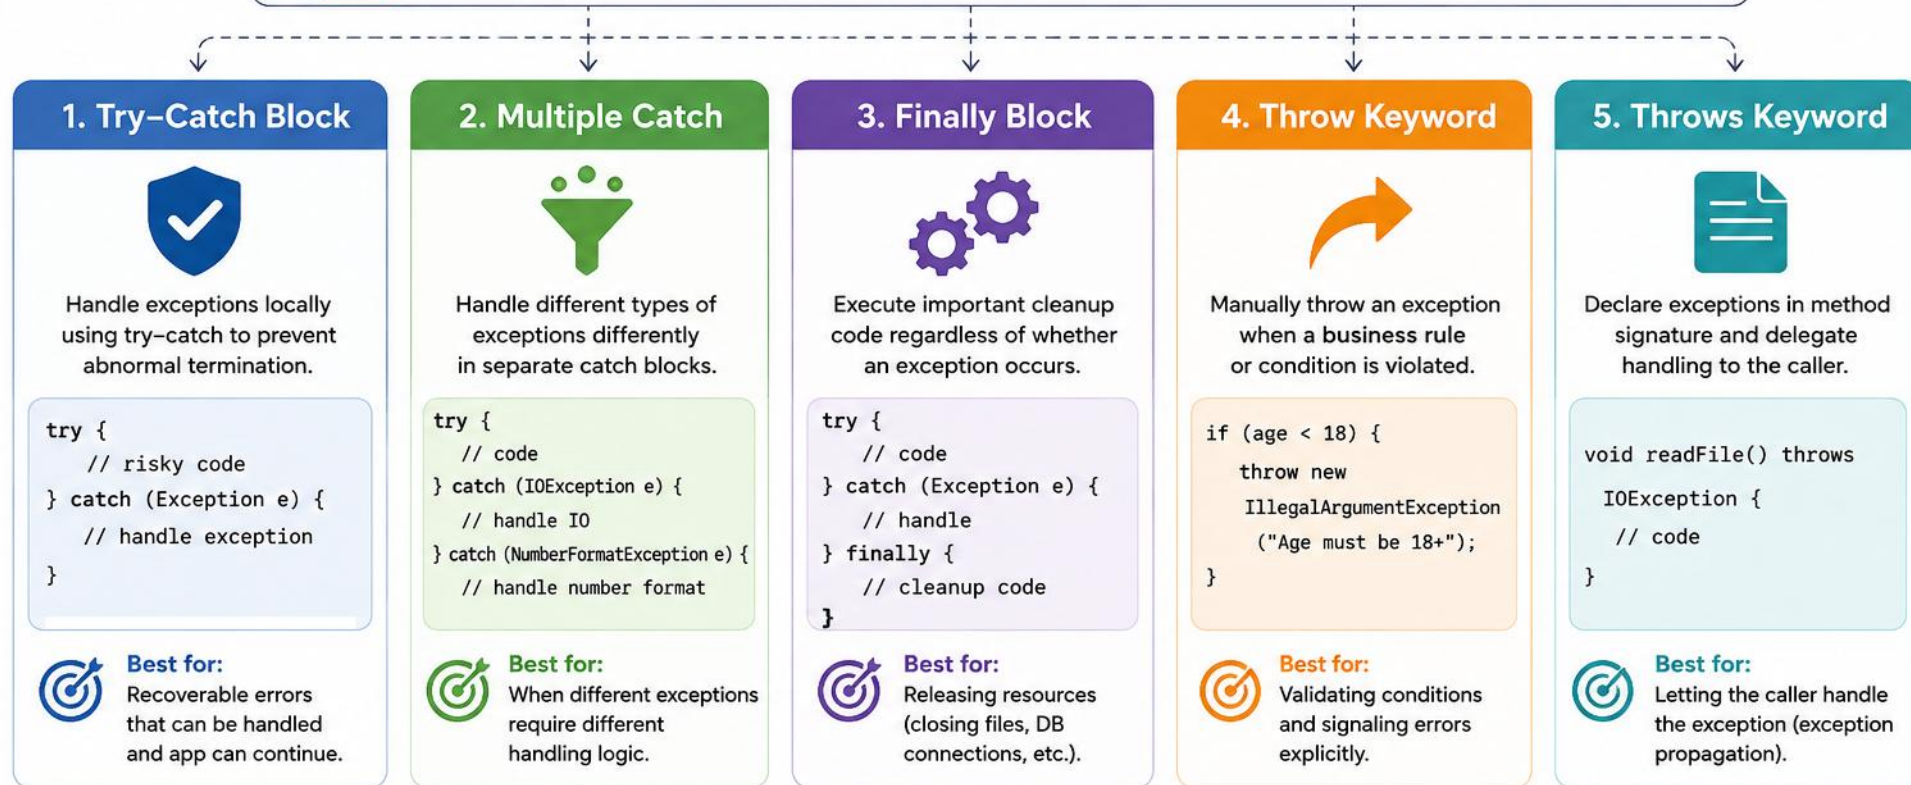

BEST PRACTICES



Catch Specific Exceptions

Avoid catching Exception or Throwable.



Log Exceptions

Always log exceptions with meaningful messages.



Don't Ignore Exceptions

Ignoring exceptions can hide bugs and cause failures.



Provide Helpful Messages

Use clear messages to help in debugging and support.



Keep It Simple & Consistent

Use consistent error handling across your application.



Remember: Good error handling improves application reliability, user experience, and makes debugging easier.

COMMON ERROR HANDLING STRATEGIES

Six patterns cover most real-world error scenarios — pick based on the failure's nature and impact.



Retry

- Retry transient failures (network blips, timeouts) with backoff.



Fallback / Default

- Provide a safe default or cached value when an operation fails.



Skip & Continue

- Isolate a bad record, log it, and keep the pipeline moving.



Fail Fast

- Stop immediately for unrecoverable or unsafe conditions.



Graceful Degradation

- Reduce functionality but keep the system available.



Circuit Breaker

- Stop calling a failing dependency until it recovers.

KEY TAKEAWAY Strategy selection guide: match the strategy to the error type, business impact, and whether the failure is transient or permanent.

STRATEGY BEST PRACTICES & LOGGING STRATEGY

The habits that keep any chosen strategy effective in production.

- Use specific exception types; provide clear and meaningful error messages; log errors with sufficient context.
- Avoid empty catch blocks; do not use exceptions for control flow; handle exceptions at the right level.
- Ensure resources are released (try-with-resources/finally); test error scenarios regularly.

LOGGING STRATEGY

```
ERROR [2026-07-12T10:32:01] userId=8842 requestId=abc123  
    NumberFormatException: "for input string: \"abc\""
```

KEY TAKEAWAY Log all exceptions with severity and context — timestamp, error type, message, user, and request ID — stored centrally for monitoring.

TRY IT YOURSELF — EXERCISE 7: ERROR HANDLING STRATEGIES

Reinforces: the six error-handling strategies you just saw.



Goal

- Implement Retry and Fallback around a flaky call, then map the other four strategies to real scenarios




Retry

- `fetchWithRetry(3)` retries a transient failure up to 3 times before giving up



Fallback

- Returns a safe default (0) once retries are exhausted, instead of propagating



Map the rest

- One sentence each for Skip & Continue, Fail Fast, Graceful Degradation, Circuit Breaker



Key concept

- Pick the strategy based on whether the failure is transient and whether a safe default exists




Reference

- `exercises/exercise-07-error-strategies.md`


TRY IT NOW Complete Exercise 7 before continuing — see `exercises/exercise-07-error-strategies.md`.

LOGGING EXCEPTIONS FOR DIAGNOSTICS

Logging provides the information needed to diagnose issues, understand root causes, and resolve them faster.

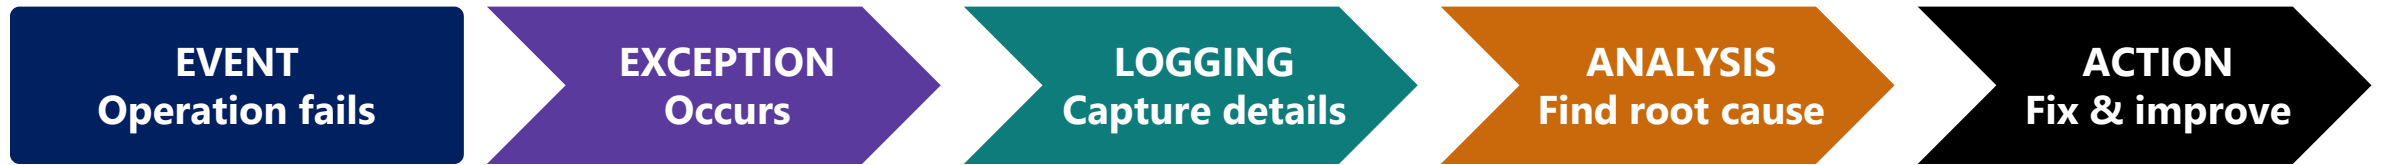


WHY LOG EXCEPTIONS?

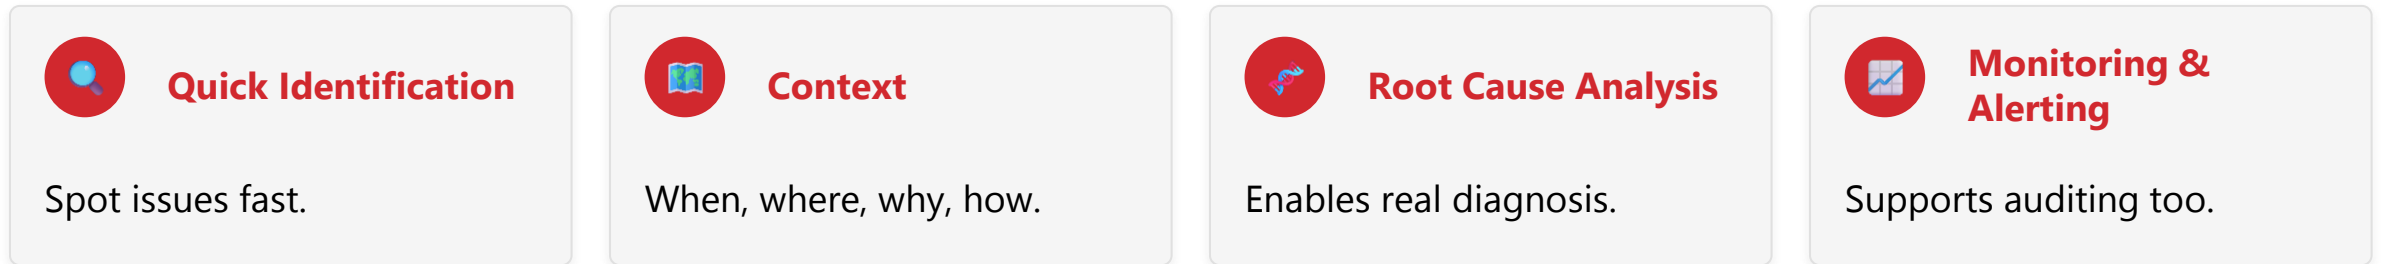

KEY TAKEAWAY Effective exception logging turns errors into actionable insights, improving system reliability and maintainability.

Logging Exceptions for Diagnostics in Java

Capture, log, store and analyze exceptions to quickly diagnose and fix issues.

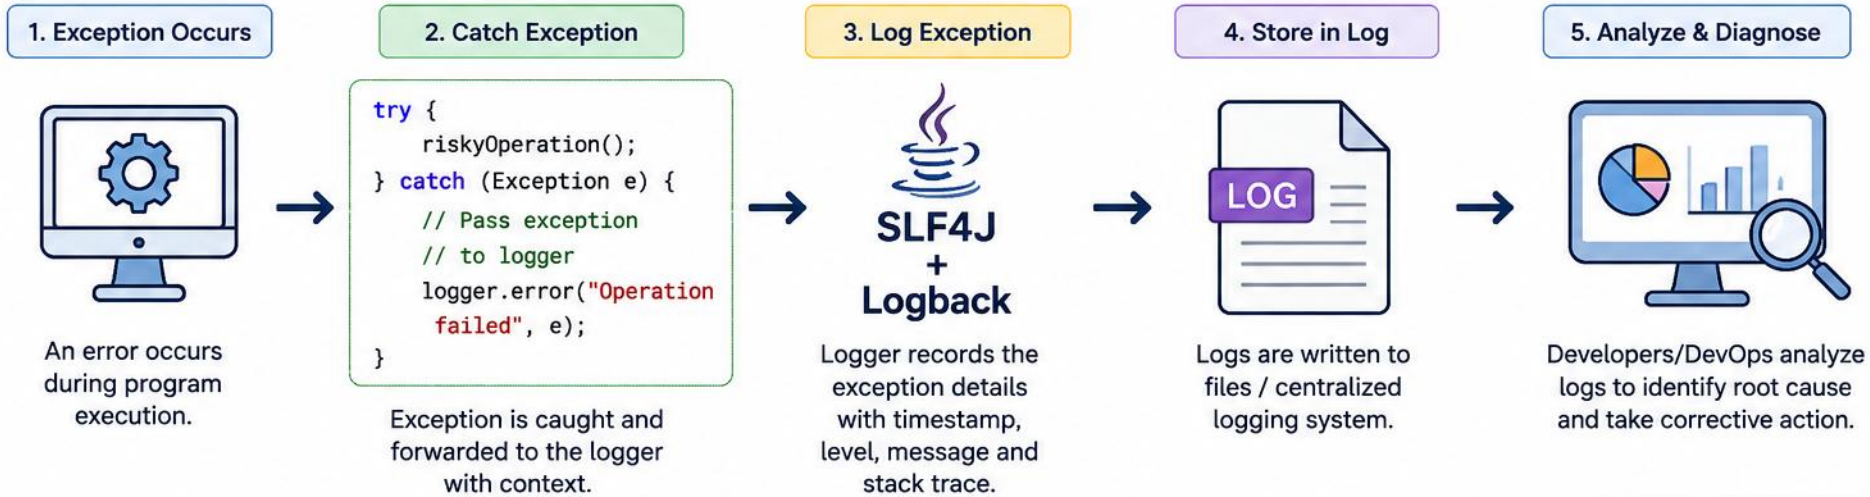

An error occurs during program execution.

Exception is caught and forwarded to the logger with context.

Logger records the exception details with timestamp, level, message and stack trace.

Logs are written to files / centralized logging system.

Developers/DevOps analyze logs to identify root cause and take corrective action.

Example: Logging in Java

```
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

public class Service {
    private static final Logger logger =
        LoggerFactory.getLogger(Service.class);

    public void process() {
        try {
            riskyOperation();
        } catch (Exception e) {
            logger.error("Operation failed for userId={}",
                userId, e);
        }
    }
}
```

Example: Log File Output

```
2025-05-20 10:15:30,123 ERROR [service-worker-1] com.example.Service -
Operation failed for userId=101
java.lang.NullPointerException: Cannot invoke "String.trim()"
because "input" is null
    at com.example.Service.process(Service.java:45)
    at com.example.Controller.handleRequest(Controller.java:78)
    at com.example.App.main(App.java:15)

Caused by: java.lang.NullPointerException: input is null
    at com.example.Validator.validate(Validator.java:33)
    ... 2 more
```

Best Practices

- ✓ Log meaningful messages
- ✓ Always include stack trace (e)
- ✓ Avoid logging sensitive data
- ✓ Use appropriate log levels (ERROR)
- ✓ Centralize logs (ELK, Splunk, etc.)



Good logging turns exceptions into actionable insights and reduces mean time to resolution (MTTR).

WHAT TO LOG & EXAMPLE LOG ENTRY

Six data points, every time — plus what a well-formed log entry looks like.



Exception Type



Error Message



Stack Trace



Timestamp



Request/User Info



App Context

```
{  
  "timestamp": "2026-07-12T10:32:01Z",  
  "level": "ERROR",  
  "exception": "NumberFormatException",  
  "message": "For input string: \"abc\"",  
  "requestId": "abc123", "userId": "8842"  
}
```

KEY TAKEAWAY Use structured (JSON) logging so entries are easily searchable and correlatable across systems.

LOGGING EXAMPLE & LOG LEVELS

SLF4J + Logback — the standard Java logging combination — plus when to use each level.

```
private static final Logger log = LoggerFactory.getLogger(UserService.class);
try { parseAge(input); }
catch (NumberFormatException e) {
    log.error("Failed to parse age for userId={}", userId, e);
}
```

LEVEL	WHEN TO USE
ERROR	Something failed and needs attention now
WARN	Unexpected but recoverable situation
INFO	Normal but significant application events
DEBUG	Detailed diagnostic information for developers

KEY TAKEAWAY Use parameterized logging (log.error("...{}", value)) to avoid string concatenation and improve performance.

GOOD LOGGING PRACTICES & DESTINATIONS

Where logs go, and the habits that keep them useful under pressure.

- Log exceptions with meaningful messages and always include the stack trace.
- Log the right context (IDs, parameters, user, module); use appropriate log levels.
- Avoid logging sensitive data (passwords, tokens, PII); use structured (JSON) logging for better analysis.
- Keep log messages concise and consistent; ensure logs are easily searchable and correlatable.

LOG DESTINATIONS



Rolling Files



ELK Stack



Splunk



CloudWatch



App Insights

KEY TAKEAWAY Logging flow: exception occurs → caught/handled → logged with context → stored → analyzed & alert triggered → issue resolved.

TRY IT YOURSELF — EXERCISE 8: CONTEXTUAL LOGGING WARM-UP

Reinforces: logging exceptions for diagnostics, as just covered.



Goal

- Log operational context and the stack trace while showing a safe user message



Context

- accountId = "A-1001" — a demo identifier, never a real PIN or secret



Log call

- `LOGGER.log(Level.SEVERE, "Withdrawal failed accountId=" + accountId, ex)`



User-safe message

- Show a short, generic message — never leak stack traces to the user



Key concept

- Good logs answer what happened, where, and why — without exposing secrets



Reference

- `exercises/exercise-08-logging-warmup.md`

TRY IT NOW Complete Exercise 8 before continuing — see `exercises/exercise-08-logging-warmup.md`.

COMMON EXCEPTION HANDLING MISTAKES

Poor exception handling can hide problems, complicate debugging, and lead to unreliable applications.

- Mistakes mask the real problem and increase downtime, make root cause analysis difficult, and can cause data corruption or security issues.

MISTAKES 1-3



1. Catching Too Generically

- `catch (Exception e) { }` masks unexpected bugs.



2. Ignoring the Exception

- Empty catch hides issues; app continues inconsistently.



3. Not Logging

- Without logs, root cause is nearly impossible to find.

KEY TAKEAWAY Three more mistakes continue on the next slide — each one hides information the next developer will desperately need.

Common Exceptions Handling Mistakes in Java

Avoid these mistakes to write reliable, maintainable and debuggable Java applications.

1 Catching Exception Too Broadly Catching Exception or Throwable hides the real problem.  ✗ Mistake <pre>try { // risky code } catch (Exception e) { // handle }</pre>  ✓ Better Approach Catch specific exceptions you can handle. <pre>try { // risky code } catch (FileNotFoundException e) { // handle file not found } catch (IOException e) { // handle other IO issues }</pre>	2 Ignoring the Exception Ignoring exceptions can lead to silent failures.  ✗ Mistake <pre>try { // risky code } catch (Exception e) { // ignore and continue }</pre>  ✓ Better Approach Handle the exception or at least log it. <pre>try { // risky code } catch (Exception e) { logger.error("Operation failed", e); // or rethrow if you can't handle it }</pre>	3 Swallowing the Exception Catching and doing nothing makes debugging hard.  ✗ Mistake <pre>try { // risky code } catch (Exception e) { // nothing here! }</pre>  ✓ Better Approach Log or rethrow the exception. <pre>try { // risky code } catch (Exception e) { logger.error("Failed to process", e); throw e; // or throw new CustomException(e) }</pre>
4 Printing Stack Trace printStackTrace() is not production ready.  ✗ Mistake <pre>try { // risky code } catch (Exception e) { e.printStackTrace(); }</pre>  ✓ Better Approach Use a logging framework. <pre>try { // risky code } catch (Exception e) { logger.error("Error occurred", e); }</pre>	5 Not Cleaning Up Resources Forgetting to close resources causes leaks.  ✗ Mistake <pre>FileInputStream fis = new FileInputStream("file.txt"); // use stream fis.close(); // may not execute if exception occurs</pre>  ✓ Better Approach Use try-with-resources. <pre>try (FileInputStream fis = new FileInputStream("file.txt")) { // use stream } // auto-closed even if exception occurs</pre>	6 Throwing Generic Exceptions Throwing Exception loses the meaning of the error.  ✗ Mistake <pre>if (invalid) { throw new Exception("Invalid input"); }</pre>  ✓ Better Approach Throw meaningful, specific exceptions. <pre>if (invalid) { throw new InvalidInputException("Invalid input"); }</pre>

**Key Takeaway**

- Handle exceptions thoughtfully.
- Provide useful information for debugging.
- Keep your application stable and maintainable.

Best Practice Checklist

- ✓ Catch specific exceptions
- ✓ Log useful error messages
- ✓ Clean up resources properly
- ✓ Rethrow or handle appropriately

© Dr. Gurinderjeet Kaur

COMMON MISTAKES, CONTINUED (4–6)

The second half of the six classic exception-handling pitfalls.



4. Only `printStackTrace()`

- Not user-friendly, hard to search, loses context in production.



5. Not Closing Resources

- `FileInputStream` left open → leaks, performance/stability issues.



6. Rethrow Without Context

- `throw new RuntimeException("File error")` loses the original cause.

```
// Poor: catch (IOException e) { throw new RuntimeException("File error"); }  
// Better:  
catch (IOException e) {  
    throw new RuntimeException("File error: " + e.getMessage(), e);  
}
```

KEY TAKEAWAY Rethrow with the original exception as the cause — never let a stack trace go silently missing.

THE BETTER PATTERN & BEST PRACTICES

Catch specific, log with context, clean up, then recover or rethrow appropriately.

```
try (PreparedStatement stmt = conn.prepareStatement(sql)) {  
    return stmt.executeQuery();  
} catch (SQLException e) {  
    log.error("Query failed for sql={}", sql, e);  
    throw new DataAccessException("Unable to fetch data", e);  
}
```

- Catch specific exceptions, not generic ones; always log with meaningful messages and context.
- Close resources using try-with-resources; handle exceptions at the right level; rethrow with cause to preserve the stack trace.

KEY TAKEAWAY The Golden Rule: handle exceptions with care, provide context, and never ignore them — your future self will thank you!


ENTERPRISE ERROR MANAGEMENT BEST PRACTICES

Effective error management is critical for building resilient, secure, and user-friendly enterprise applications.

ERROR MANAGEMENT LIFECYCLE



WHY IT MATTERS

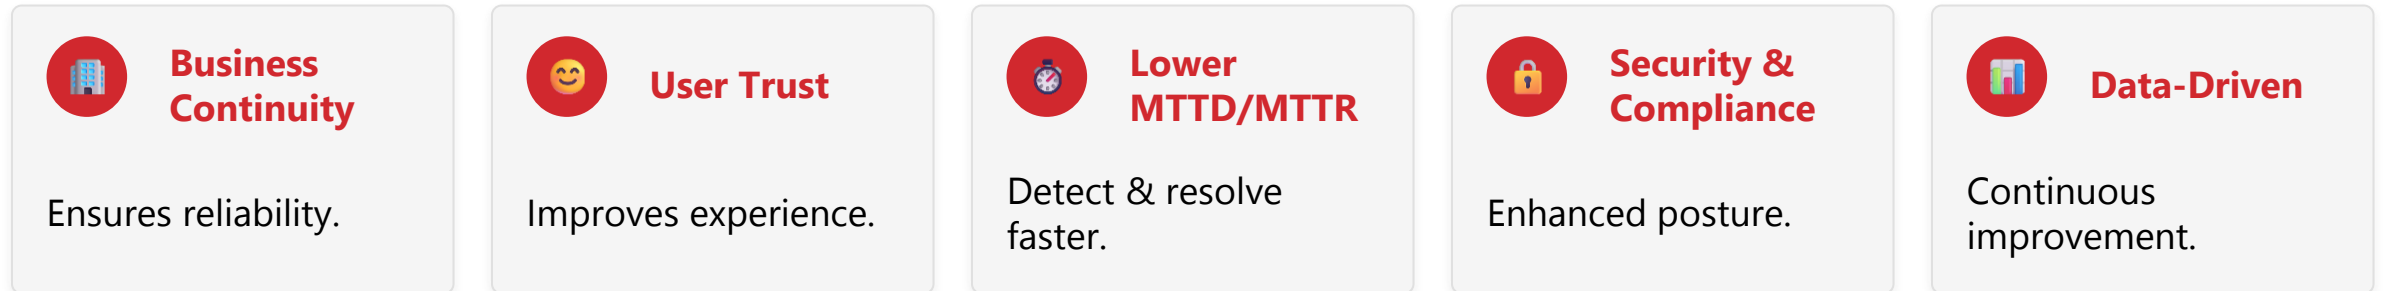


KEY TAKEAWAY Great error management is proactive, consistent, and continuous — it reduces risk and drives better business outcomes.

ENTERPRISE ERROR MANAGEMENT BEST PRACTICES

JAVA

Build reliable, secure and maintainable enterprise applications

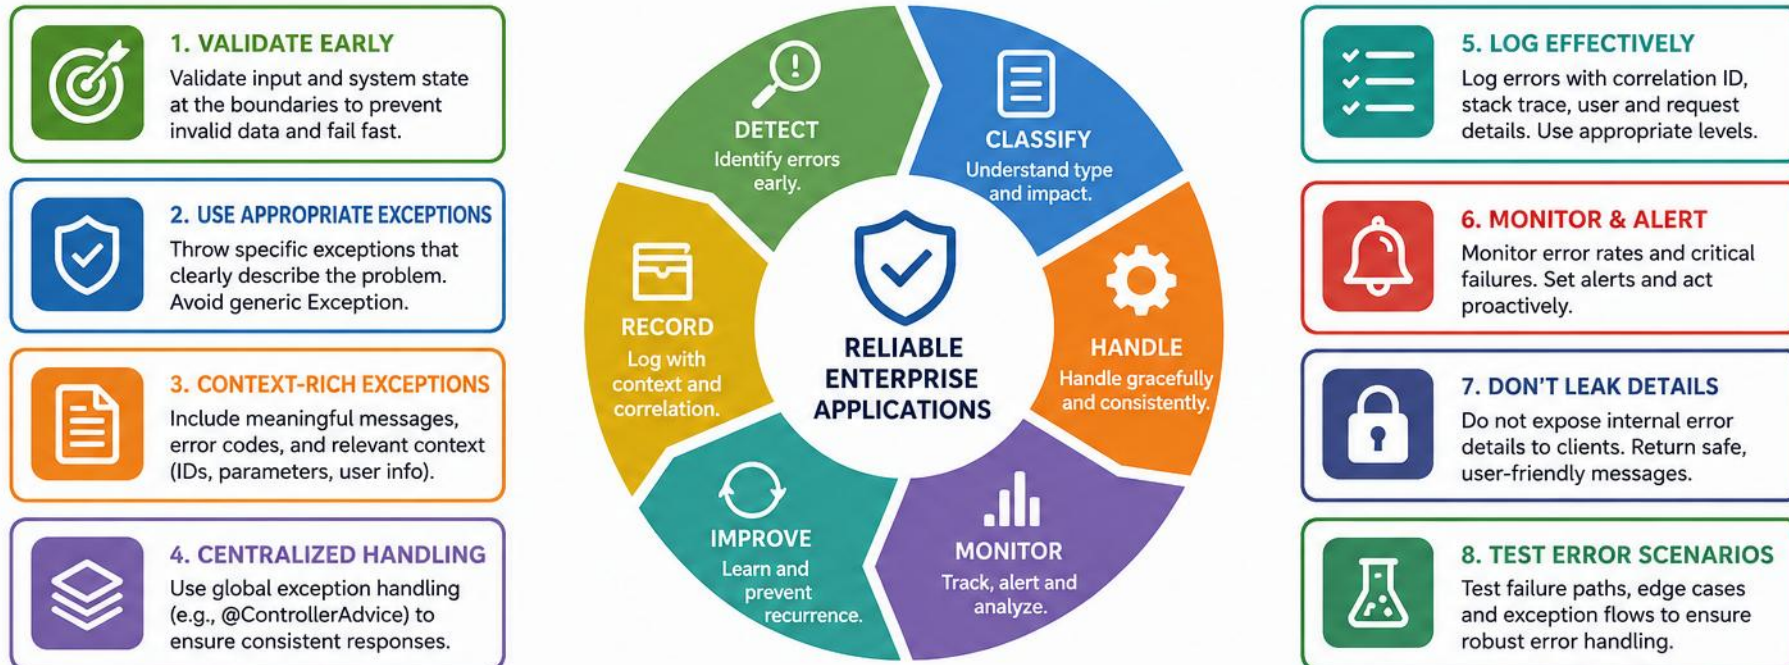

FOUNDATIONAL PRINCIPLES



FAIL SAFE

Keep the system stable and protect data integrity.



USER CENTRIC

Provide clear, actionable messages for users and support teams.



SECURE BY DESIGN

Prevent information leakage and follow the principle of least privilege.



OBSERVABLE

Make errors observable with metrics, logs and dashboards.



CONTINUOUS IMPROVEMENT

Analyze root causes, improve processes and reduce error rates.

EXAMPLE FLOW



© 2026 Dr. Gurinderjeet Kaur. All rights reserved.

1. ROBUST ERROR HANDLING DESIGN & 2. CENTRALIZED LOGGING

Consistent patterns, applied across every layer of the application.

1. ROBUST ERROR HANDLING DESIGN

- Use consistent exception handling patterns across the app; do not expose sensitive details to end users.
- Handle errors at the appropriate layer; provide meaningful messages and recovery options.

2. CENTRALIZED LOGGING & MONITORING



KEY TAKEAWAY Log errors with context — timestamp, user, requestId, operation, environment — and monitor error rate, failure rate, latency, availability.

3. CONTEXT-RICH ERRORS & 4. SECURITY & COMPLIANCE

More context means faster root cause analysis — but never at the cost of exposing sensitive data.

3. CONTEXT-RICH ERROR INFORMATION: More context = faster root cause analysis.

4. SECURITY & COMPLIANCE

- Do not log sensitive data (PII, passwords, tokens, credit card numbers); mask or redact sensitive information.
- Enforce access control on logs and monitoring tools; retain logs based on compliance and data governance policies.
- Ensure audit trails for all critical errors.

KEY TAKEAWAY Security and diagnostics pull in opposite directions — context helps debugging, but never at the cost of leaking sensitive data.

5. RESILIENCE & AVAILABILITY & 6. CONTINUOUS IMPROVEMENT

Design for graceful degradation, then close the loop with a repeatable review cycle.

5. RESILIENCE & AVAILABILITY

- Use circuit breakers, retries with backoff, and fallbacks; design for graceful degradation.
- Handle transient failures differently from user or data errors; ensure idempotency for safe retries; test failure scenarios regularly.

6. CONTINUOUS IMPROVEMENT



KEY TAKEAWAY Close the loop: Learn → Improve → Prevent.

7. INCIDENT RESPONSE READINESS & CHECKLIST

The final piece: knowing exactly what to do when something goes wrong.

7. INCIDENT RESPONSE READINESS

- Have a documented incident response process; define roles and escalation paths.
- Use runbooks for common issues; communicate clearly with stakeholders; conduct post-incident reviews (PIRs) and blameless retrospectives.

BEST PRACTICES CHECKLIST

- Handle exceptions explicitly and consistently; log with rich context at the right level; monitor and alert proactively.
- Protect sensitive data and ensure compliance; design for resilience; review, learn, and improve continuously.

KEY TAKEAWAY You can't prevent all errors, but you can manage them effectively — detect fast, respond smart, learn continuously.

LAB OVERVIEW: EXCEPTION HANDLING

Explore practical techniques for handling exceptions and building robust, reliable Java applications.



LAB PURPOSE — GAIN HANDS-ON EXPERIENCE IN

- Working with checked and unchecked exceptions; using try-catch, finally, and try-with-resources.
- Propagating exceptions with throw and throws; creating and using custom exceptions.
- Logging exceptions for diagnostics; applying best practices for enterprise error management.

KEY TAKEAWAY The skills you gain here are essential for building enterprise-grade applications that are resilient, secure, and easy to maintain.

PRE-LAB EXERCISES OVERVIEW

Eight short warm-ups to complete before starting the official Lab 7 (ATM Banking System).

KEY CONCEPTS COVERED

- Exception Hierarchy · Try-Catch Blocks · Finally & Try-With-Resources · Throw & Throws · Custom Exceptions · Propagation · Error Handling Strategies · Logging & Diagnostics · Best Practices.

PRE-LAB EXERCISES (1–8)

- 1 Trigger common exceptions — `ArithmeticException`, `NullPointerException`, `ArrayIndexOutOfBoundsException`.
- 2 try-catch-finally — simulate a transfer; finally always prints “cleanup”.
- 3 try-with-resources — read a small file; the resource closes automatically.
- 4 throw and throws — `validateAmount()` rejects amounts ≤ 0 .
- 5 Custom exception — checked `InsufficientFundsException` thrown from `withdraw()`.
- 6 Exception propagation — `A→B→C` call chain; catch only in A.
- 7 Error handling strategies — retry a flaky `fetchBalance()` call, then fall back to a safe default.
- 8 Logging warm-up — log an exception with account-id context.

Next: open Lab 7 — the official ATM Banking System lab.

KEY TAKEAWAY Environment: JDK 21, IntelliJ IDEA Community (or VS Code), plain console output — no external logging framework required.

EXPECTED OUTCOMES & LAB FLOW

What you'll walk away able to do, and how the Lab 7 (ATM Banking System) session is structured.

EXPECTED OUTCOMES

- Understand how Java handles exceptions; confidently apply different exception handling techniques.
- Create meaningful error messages and logs; write clean, maintainable, robust code; improve reliability and UX.

LAB FLOW



KEY TAKEAWAY Lab 7 duration: 3–4 hours (individual activity), preceded by ~30–45 minutes of pre-lab exercises.

LAB 7: ATM BANKING SYSTEM — SCENARIO

The official Lab 7 — build a fault-tolerant ATM console application under package `com.academy.atm`.



BUSINESS SCENARIO: a bank hardens its classroom ATM simulator — login with PIN retry limits, deposit, withdraw, transfer (with rollback), and mini statement — so invalid input never crashes the JVM and every error is logged.

- Prerequisites: Core Java (OOP, Collections, I/O), JDK 21, IntelliJ IDEA Community (or VS Code); completed pre-lab exercises 1–8 and Lab 0 setup.

KEY TAKEAWAY Every construct from this module — checked/unchecked exceptions, try-catch-finally, throw/throws, custom exceptions, propagation, and logging — comes together in one realistic ATM Banking System.

LAB 7 TASKS — STEP BY STEP

Core implementation steps, from project setup to a fully logged, menu-driven ATM console app.

- | | | | |
|---|---|---|--|
| 1 | Set Up Project — package com.academy.atm, logs/, and transactions.txt. | 1 | Deposit, Withdraw, Transfer — throw/catch/finally; rollback on failed transfer. |
| 2 | Create Custom Exceptions — InvalidAmountException, InsufficientFundsException, InvalidPinException, AccountNotFoundException. | 2 | Mini Statement — try-with-resources reads transactions.txt. |
| 3 | Build Account & Transaction — throw on invalid amount/overdraft; track history. | 3 | Unchecked Exception Demos — handle NullPointerException, Arithmetic, ArrayIndexOutOfBoundsException. |
| 4 | Build LoggerUtil — timestamped INFO/ERROR entries to logs/application.log. | 4 | Menu-Driven Main — invalid choices recover; only option 7 exits. |
| 5 | ATMService & Login — seed accounts; PIN retry limit (max 3) via multi-catch. | 5 | Compile, Run & Verify — javac -d out; walk success/failure paths; inspect logs. |

KEY TAKEAWAY This is the complete lifecycle of building an error-resilient ATM Banking System, from custom exceptions to verified logs.

LAB 7 DELIVERABLES & EVALUATION RUBRIC

Nine deliverables to submit, graded against a 100-mark rubric.

DELIVERABLES

- Complete src/com/academy/atm project (Main, Account, Transaction, ATMService, LoggerUtil); four custom exception classes; transactions.txt.
- logs/application.log evidence; screenshots of success & failure paths; README (setup, hierarchy, logging strategy, lessons learned); reflection notes.

EVALUATION RUBRIC (100 MARKS)

- Project Structure 10 · Checked/Unchecked Handling 15 · Custom Exceptions 15 · try-catch-finally 15 · throw/throws 10 · Propagation 10 · try-with-resources 10 · Logging & Recovery 10 · Code Quality 5.

KEY TAKEAWAY Bonus stretch: transaction rollback, daily error report, PIN retry lock — plus the optional Week 1 Integrated Mini Project (Employee Management System v1).

MODULE 7 SUMMARY

You've learned how to effectively handle, propagate, and manage errors to build reliable, maintainable Java applications.

- Exceptions are events — they represent problems that occur during program execution.
- Handle close, throw far — handle exceptions where you can recover; propagate when you cannot.
- Clean up resources — always release resources using finally or try-with-resources.
- Informative errors — provide meaningful messages and log with context.
- Plan and standardize — use best practices and consistent strategies for enterprise reliability.


EXCEPTION FLOW RECAP



KEY TAKEAWAY Good error management doesn't just handle failures — it prevents downtime, protects users, and builds trust.

WHAT WE COVERED & BEST PRACTICES AT A GLANCE

A recap of every topic in this module, and the six habits that tie them together.

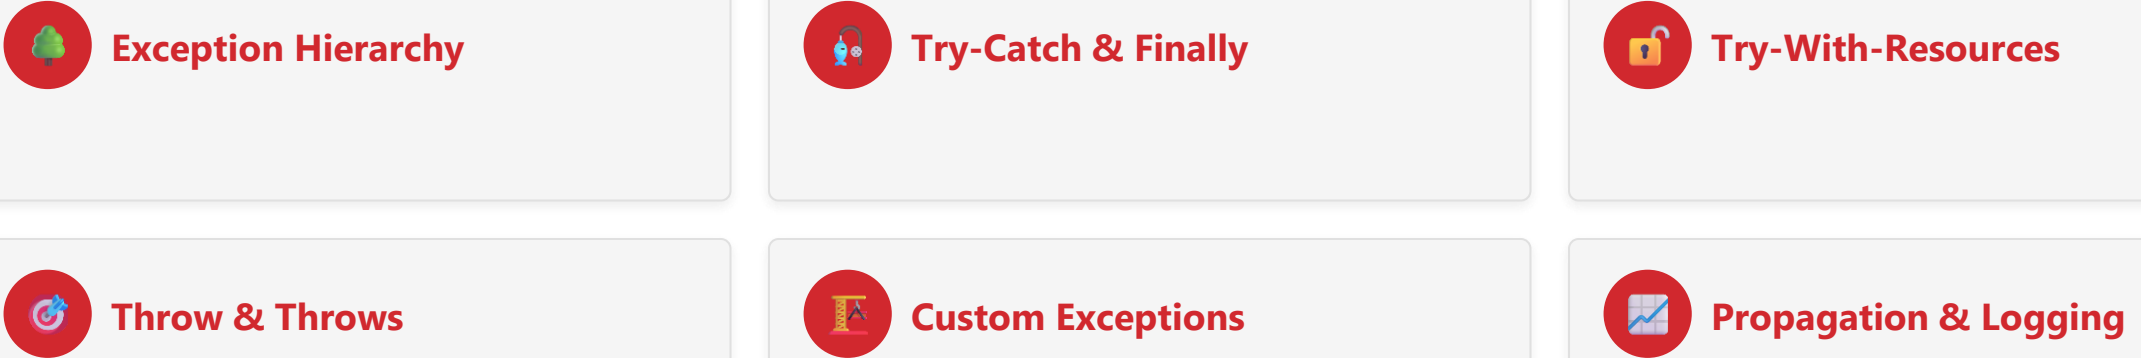

- Be specific, provide context, clean resources, log effectively, think user first, test & review.

KEY TAKEAWAY Closing motto: Handle with care. Log with purpose. Build with confidence.

MODULE 7 KNOWLEDGE CHECK — MULTIPLE CHOICE (1–5)

Choose the best answer. Correct answers are marked ✓.

1. What is the root of the Java exception hierarchy?

A) Exception B) RuntimeException **C) Throwable ✓** D) Error

2. What happens when an exception is not handled in the current method?

A) The program crashes immediately **B) It propagates up the call stack to the caller ✓** C) It is silently ignored D) It is auto-logged and discarded

3. Which mechanism automatically closes resources like files or connections?

A) finally block **B) try-with-resources ✓** C) throws clause D) Garbage Collector

4. Which strategy isolates a bad record and keeps the pipeline running?

A) Fail fast **B) Skip and continue ✓** C) Circuit breaker D) Ignore silently

5. What is the key difference between throw and throws?

A) They are identical keywords **B) throw raises an exception; throws declares it in a method signature ✓** C) throws raises an exception; throw declares it D) throw is only for checked exceptions

KEY TAKEAWAY Five more multiple-choice questions continue on the next slide.

MODULE 7 KNOWLEDGE CHECK — MULTIPLE CHOICE (6–10)

Choose the best answer. Correct answers are marked ✓.

6. How do you declare that a method may throw a checked exception?

- A) Using throw in the method body **B) Using throws in the method signature ✓** C) Using catch in the method signature D) Checked exceptions cannot be declared

7. Which of the following is an unchecked exception?

- A) IOException B) SQLException **C) NullPointerException ✓** D) FileNotFoundException

8. What is a best practice when creating custom exceptions?

- A) Always extend Throwable directly **B) Provide meaningful messages and relevant context ✓** C) Never include a message D) Avoid custom fields entirely

9. What is a best practice for logging exceptions?

- A) Only call e.printStackTrace() **B) Log with context, stack trace, and appropriate level ✓** C) Log passwords for debugging D) Avoid logging in production

10. Why do enterprise applications need good error handling?

- A) It's optional for small teams **B) It reduces downtime, protects users, and builds trust ✓** C) It only matters for security teams D) It slows down development unnecessarily

KEY TAKEAWAY Core reminders: propagate when you cannot handle, handle when you can recover, and always log with stack trace and context.

WEEK 1 REVIEW AND KEY TAKEAWAYS

This week, we explored the foundations of Exception Handling and Error Management to build reliable, resilient enterprise applications.

WHAT WE COVERED

- Java exception hierarchy: checked vs. unchecked; try-catch, finally, and try-with-resources.
- Throw and throws keywords; creating custom exceptions; exception propagation and call stack behavior.
- Error handling strategies and best practices; logging exceptions for diagnostics.
- Common mistakes and how to avoid them; enterprise error management best practices.

KEY TAKEAWAY Handle with care. Log with purpose. Build with confidence.

WEEK 1 KEY TAKEAWAYS

Eight lessons that carry forward into every Java application you build from here.

- 1 Exceptions are Events — problems during execution that must be handled gracefully.
 - 2 Use the Right Mechanism — try-catch, finally, or try-with-resources based on scenario.
 - 3 Propagate When Needed — throw and throws to pass exceptions up the call stack.
 - 4 Be Specific & Meaningful — custom exceptions and clear messages.
- 1 Log with Context — meaningful context at appropriate levels.
 - 2 Handle Strategically — fail fast, retry, or graceful degradation.
 - 3 Avoid Common Pitfalls — don't ignore, over-catch, or expose sensitive info.
 - 4 Follow Best Practices — consistent management leads to trustworthy apps.

KEY TAKEAWAY Good error management doesn't just handle failures — it prevents downtime, protects users, and builds trust.

SKILLS GAINED & WHAT'S NEXT

You're ready to apply these concepts hands-on, in real-world scenarios.

SKILLS GAINED



Robust Handling

Design and implement it.



Custom Exceptions

Create and use them.



Propagation

Across layers, effectively.



Log & Analyze

For better diagnostics.



Enterprise Practices

Apply best practices.

WHAT'S NEXT?

Code

Test

Analyze

Improve

Deliver

Next, apply these concepts hands-on in Lab 7 — the ATM Banking System — to wrap up Week 1 before moving into Week 2.

KEY TAKEAWAY Handle with care. Log with purpose. Build with confidence.

Week 1 complete

You can now handle, propagate, and manage errors to build reliable and resilient Java applications.

Hands-on labs and real-world projects are next in your toolkit.