

Aim

To demonstrate Arrow Functions and Anonymous Functions using JavaScript.

Introduction

JavaScript supports different types of functions. Arrow functions provide a concise syntax, whereas anonymous functions are functions without names and are mainly used as callback functions.

Code

```
<html>
  <head></head>
  <body>
    <script>
function add()
{
  a=20,b=20;
  console.log(`1.sarin deore normal function withot return add= ${a+b}`);
}
function add1 ()
{
  a=20,b=20;
  return `2.sarin deore normal function with return add= ${a+b}`;
}
function add3(a,b)
{
  a=20,b=20;
  console.log(`3.sarin deore normal function with parameter withot return
add= ${a+b}`);
}
function add4(a,b)
{
  a=20,b=20;
  return `4.sarin deore normal function with parameter withot return add=
${a+b}`;
}
  add();
console.log(add1());
  //add2();
  add3(15,25);
  console.log(add4(25,35));
var add5=function()
{
  a=20,b=20;
```

```

    console.log(`5.sarin deore anonymous function withot return add=
${a+b}`);
}
var add6=function()
{
    a=20,b=20;
    return `6.sarin deore anonymous function with return add= ${a+b}`;
}
var add7=function(a,b)
{
    a=20,b=20;
    console.log(`7.sarin deore anonymous function with parameter without
return add= ${a+b}`);
}
var add8=function(a,b)
{
    a=20,b=20;
    return `8.sarin deore anonymous function with parameter withot return
add= ${a+b}`;
}
    add5();
console.log(add6());
    //add2();
    add7(15,25);
    console.log(add8(25,35));
    var add9=() =>
    {
        a=20,b=20;
        console.log(`9.sarin deore arrow function withot return add= ${a+b}`);
    }
var add10=() =>
{
    a=20,b=20;
    return `10.sarin deore arrow function with return add= ${a+b}`;
}
var add11=(a,b) =>
{
    a=20,b=20;
    console.log(`11.sarin deore arrow function with parameter without return
add= ${a+b}`);
}

```


```

}
var add12=(a,b) =>
{
    a=20,b=20;
    return `12.sarin deore arrow function with parameter withot return add=
${a+b}`;
}
add9();
console.log(add10());
//add2();
add11(15,25);
console.log(add12(25,35));
</script>

</body>
</html>

```

Output

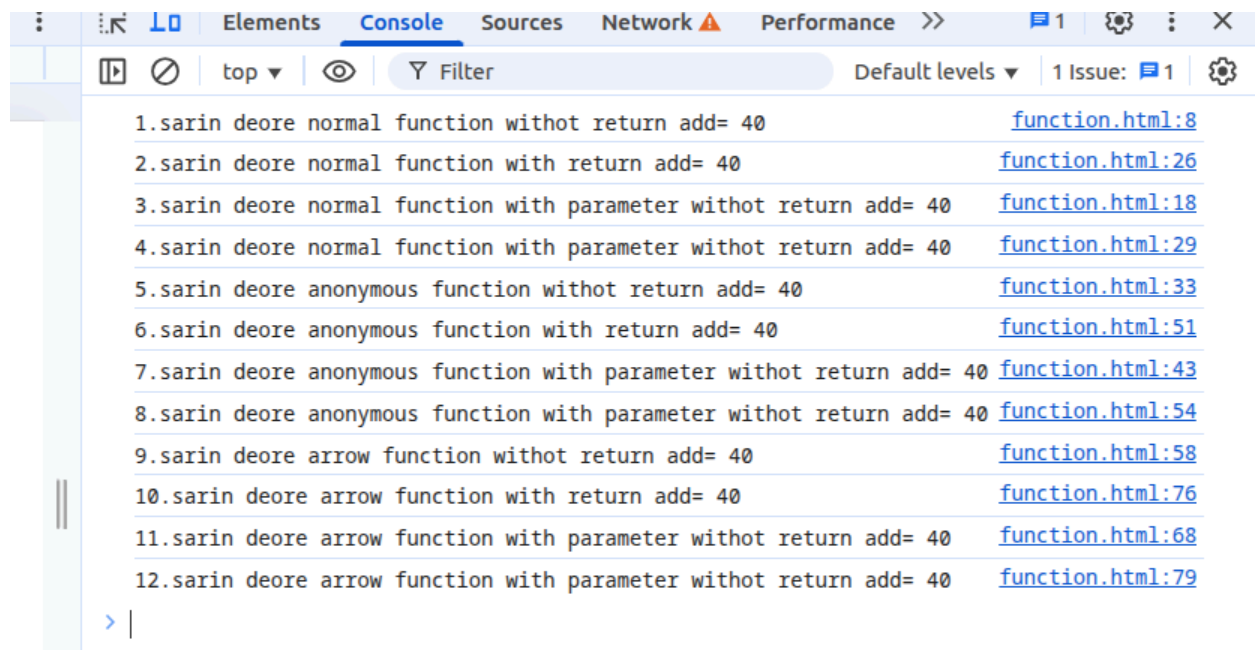

Conclusion:

Arrow and anonymous functions were successfully implemented using JavaScript.

CheqMate Analysis Report

Plagiarism Score: 38.38%

AI Probability: 49.34%

Topic Knowledge Score: 1.71

Lab Performance Score: 1.49

Matches found:

- Submission ID: 1 (Similarity: 38.38%)