



Table of contents

[Overview](#)

[Scan summary](#)

[Status counts](#)

[Settings](#)

[Errors](#)

[Charts](#)


Click a section to jump to it. The PDF bookmarks also link to individual charts and diagnostics.



Overview

Findings by chart

Which charts have violations, warnings, or unresolved diagnostics?

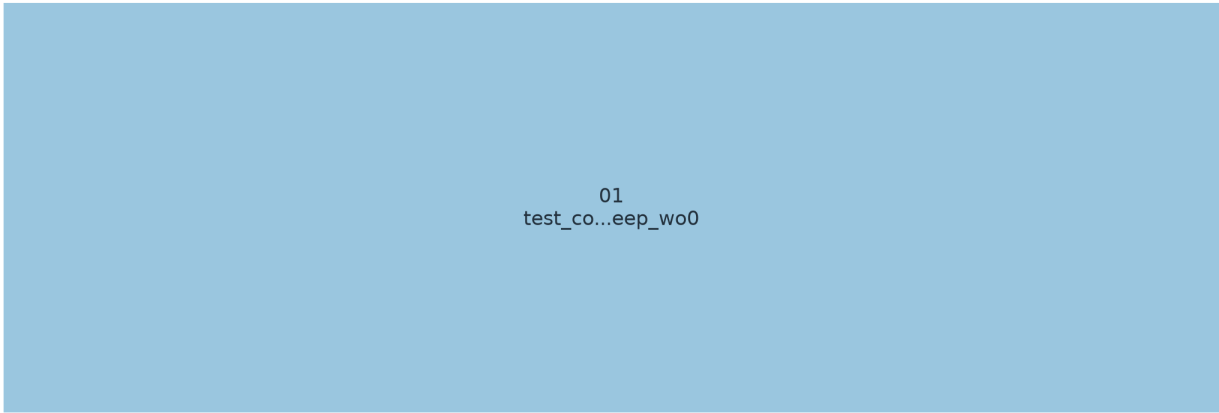

- Violation
- Warning
- Diagnostic
- No findings
- Incomplete
- Not tested
- Testing unfinished / unavailable

Elapsed chart time by chart

Which charts used the most time? Cells match the chart grid above.



Read left to right, then down. Cell numbers match the chart sections; -- means timing unavailable.

Each cell is one chart; both grids follow chart-section order. Click a cell in the PDF for details. Colors show the highest observed finding kind, not a security or business-impact score. Hatching marks unfinished or unavailable testing, even when a finding was recorded. No findings means none in the completed sample, not exhaustive coverage. Elapsed chart time includes dependency preparation.



Scan summary

Run: cold. All 3 shards reported; 12 selected properties.
Executed: 12; reused cached successes: 0; failures: 1; errors: 0; skipped: 0.
Render hashes are process-local; their counts cannot establish global output uniqueness.
Directory: /private/var/folders/dd/pd400p1j4vgf5gv6qp6zfx000000gn/T/pytest-of-emmadoyle/pytest-1056/popen-gw3/test_concurrent_shards_keep_wo0/results
Started (Unix epoch): 1789761763.417759
Elapsed (wall clock): 8.27 seconds
Charts discovered: 1
Scan status: completed
Discovery complete: True
Unstarted charts: 0

Results record outcomes for the tested sample and selected checks.
Baseline-only, skipped, blocked, and incomplete charts retain their respective statuses.

Status counts

1 failed.

Settings

Filtering: not recorded | Seed: not recorded | Traversal: random
Chart timeout: not recorded seconds | Workers: not recorded
Complete settings are retained in the JSON report.
Disabled checks: HH2006

Errors

1 distinct diagnostics across 1 occurrences; 0 repeats grouped.
Diagnostics and their triggering inputs are grouped under each chart below.
Up to two examples per diagnostic and six fields per example are shown. Long values and diagnostics are shortened.
Full inputs, diagnostics, and remaining cases are retained in local run data.
Selected fields identify the inputs varied by the test. Causal attribution requires further investigation.

Charts

test_concurrent_shards_keep_wo0

Overview cell: 01
Status: failed | Attempts: N/A

E001

```
index = 7 @pytest.mark.parametrize("index", range(12)) def test_property(index):  
    emit_manifest({"apiVersion": "v1", "kind": "ConfigMap",  
    "metadata": {"name": f"case-{index}"}}) > assert index != 7 E assert 7 != 7 test_chart_values.py:9:  
AssertionError
```

Phase: shard 3/3: test_chart_values.test_property[7] | Status: failed

No triggering values were recorded for this diagnostic.

[Full input and diagnostic](#)

[Chart artifacts](#)